
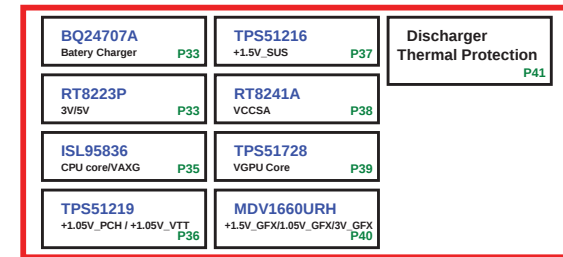


ZQTA/ZQSA CRV SYSTEM BLOCK DIAGRAM


BOM

IV@ : iGPU
 EV@ : dGPU
 OP@ : Optimus
 DO@ : Discrete only
 SP@ : Special
 SNP@ : N13PGS/GL
 IV@ : UMA
 GL@ : N13PGL
 GS@ : N13P/MGS

Optimus : IV@ + EV@ + OP@
 Discrete only : EV@ + DO@

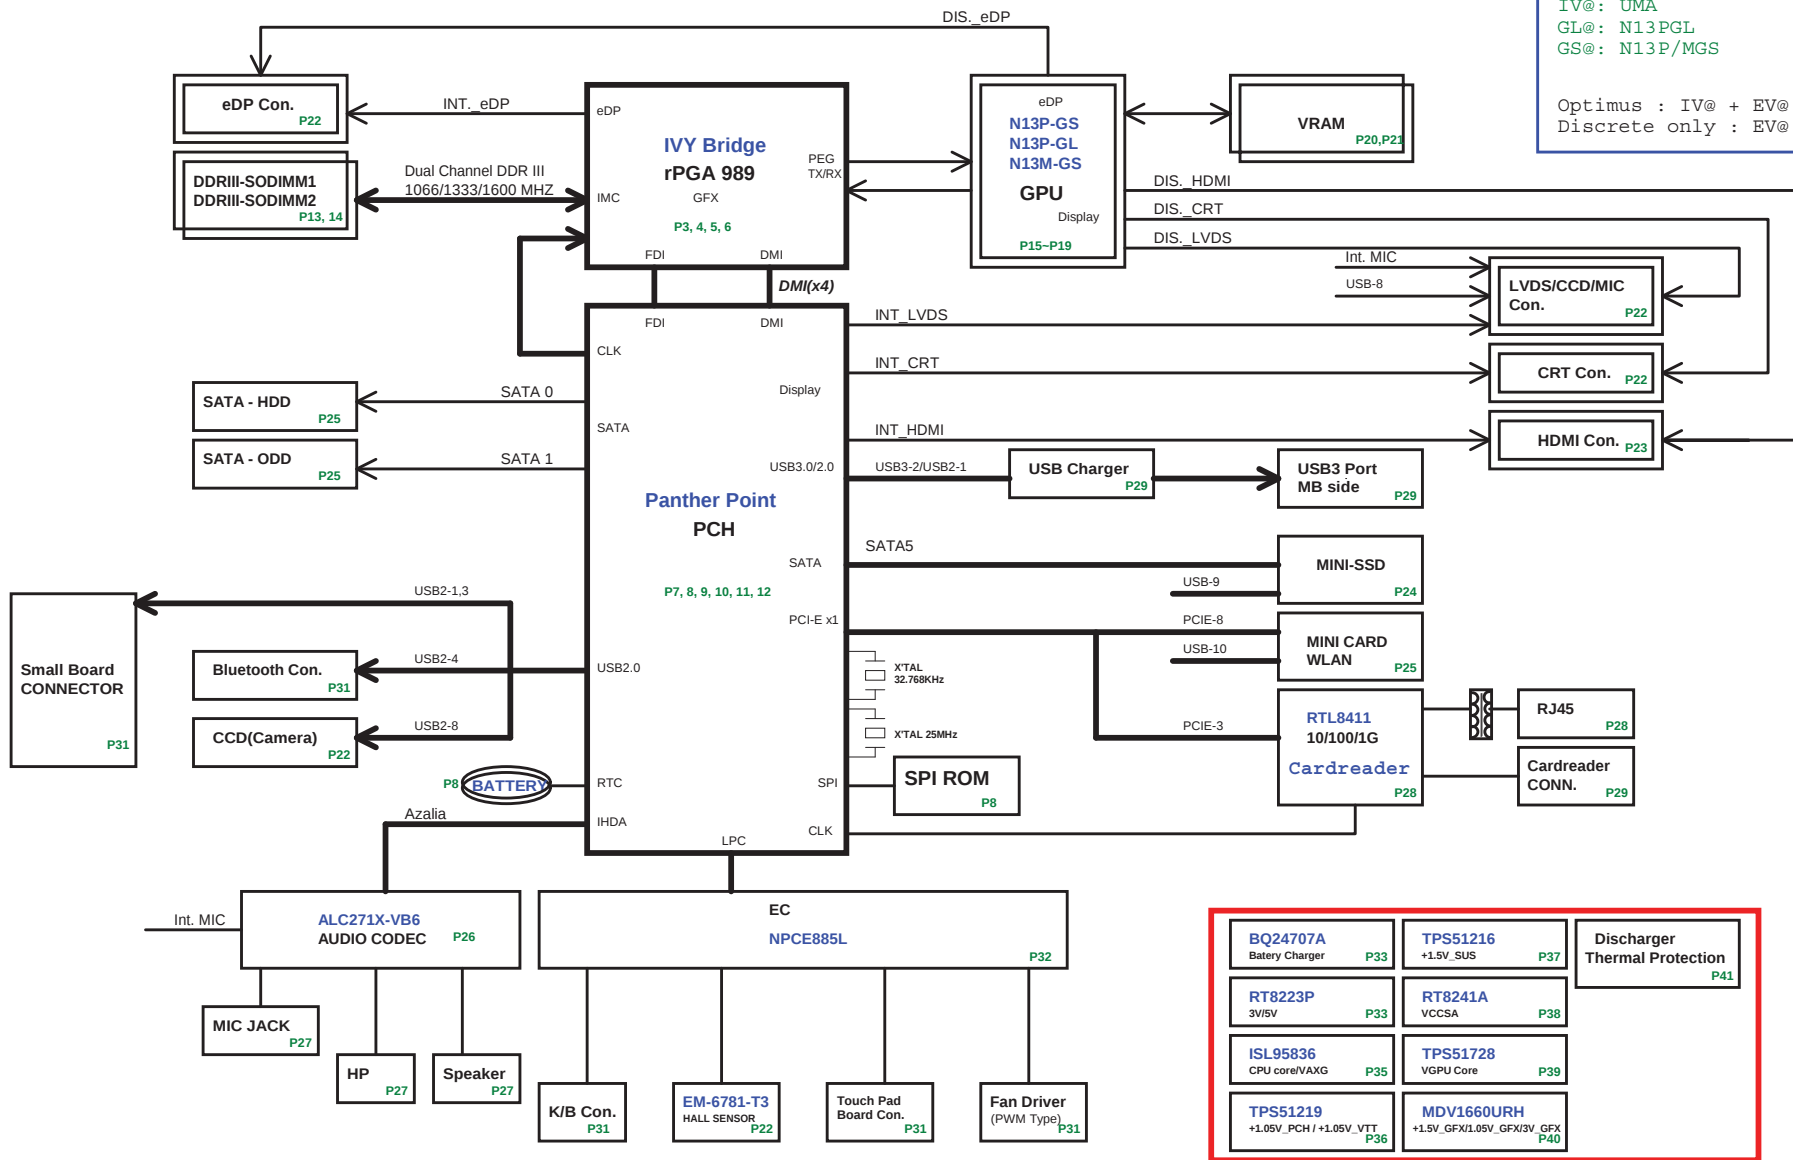


VGA power up sequence

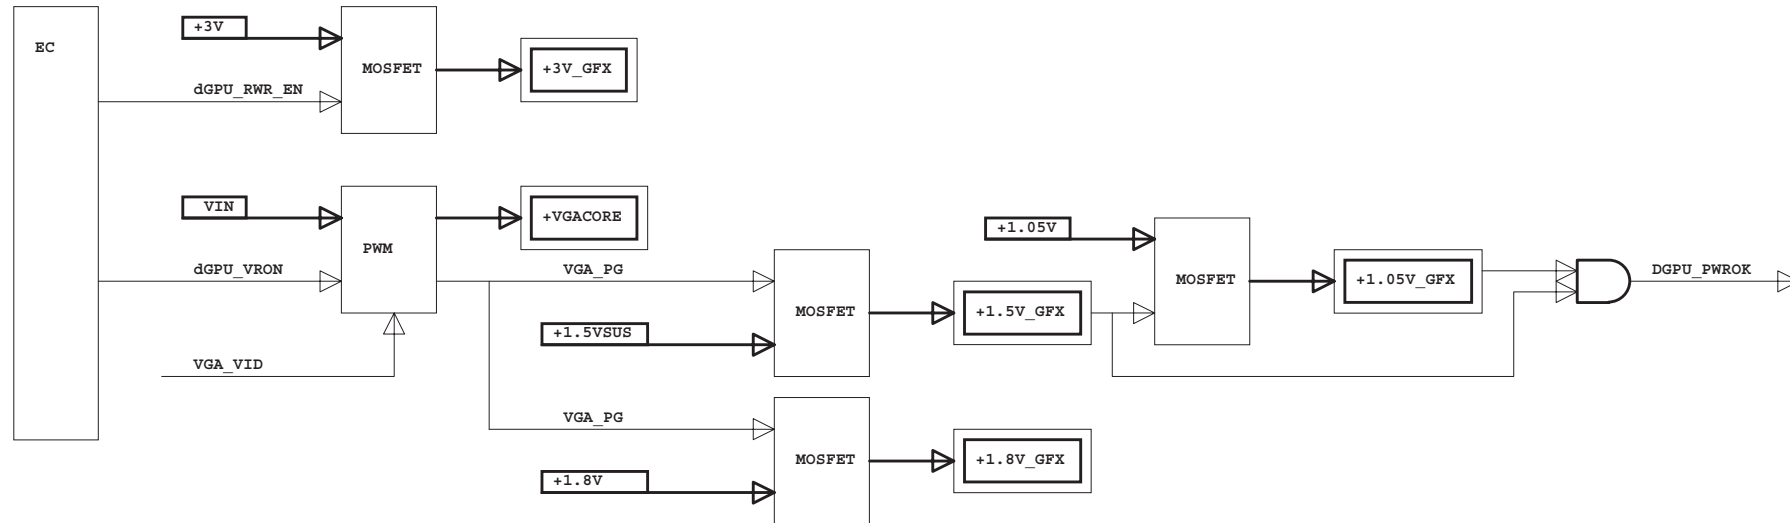


Power States

POWER PLANE	VOLTAGE	DESCRIPTION	CONTROL SIGNAL	ACTIVE IN
VIN	+10V~+19V	MAIN POWER	ALWAYS	ALWAYS
+3V_RTC	+3V~+3.3V	RTC POWER	ALWAYS	ALWAYS
+3VPCU	+3.3V	EC POWER	ALWAYS	ALWAYS
+5VPCU	+5V	CHARGE POWER	ALWAYS	ALWAYS
+15V	+15V	CHARGE PUMP POWER	ALWAYS	ALWAYS
+3V_S5	+3.3V	LAN/BT/CIR POWER	S5_ON	S0-S5
+5V_S5	+5V	USB POWER	S5_ON	S0-S5
+5V	+5V	HDD/ODD/Codec/TP/CRT/HDMI POWER	MAINON	S0
+3V	+3.3V	PCH/GPU/Peripheral component POWER	MAINON	S0
+1.5VSUS	+1.5V	CPU/SODIMM CORE POWER	SUSON	S0-S3
+0.75V_DDR_VTT	+0.75V	SODIMM Termination POWER	MAINON	S0
+VGFX_AXG	variation	Internal GPU POWER	VRON	S0
+1.8V	+1.8V	CPU/PCH/Braidwood POWER	MAINON	S0
+1.5V	+1.5V	MINI CARD/NEW CARD POWER	MAINON	S0
+1.05V	+1.05V	PCH CORE POWER/IVY/SNB bridge VCCIO	MAINON	S0
+VCCSA	+0.9V	CPU POWER	HWPG_VTT	S0
+VCC_CORE	variation	CPU CORE POWER	VRON	S0
LCDVCC	+3.3V	LCD POWER	LVDS_VDDEN	S0
			MAINON	S0

Thermal Follow Chart



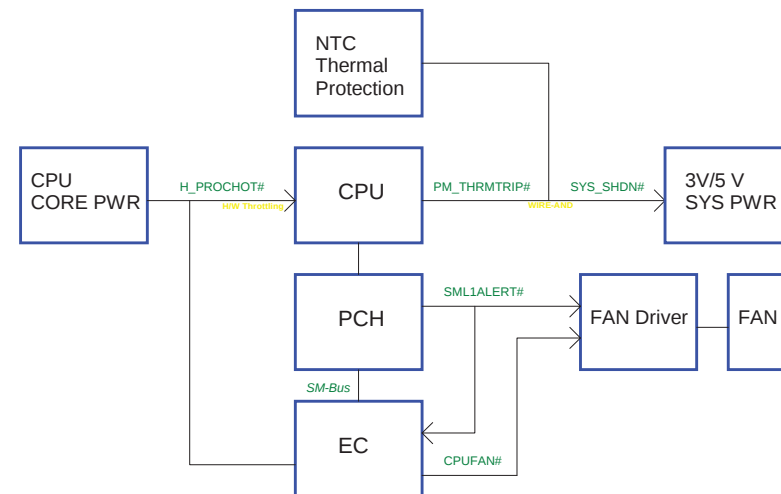


IVY Bridge Processor (CLK,MISC,JTAG)






For XDP

eDP_COMPIO and ICOMPO signals should
be shorted near balls and routed with

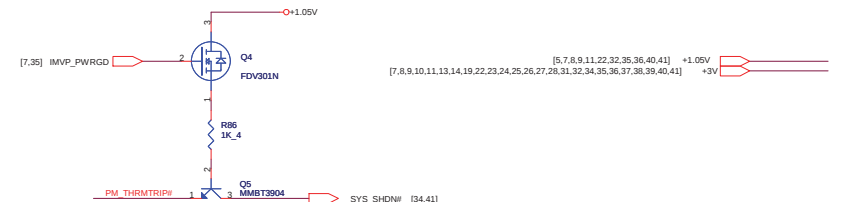


IVY Bridge Processor (DDR3)

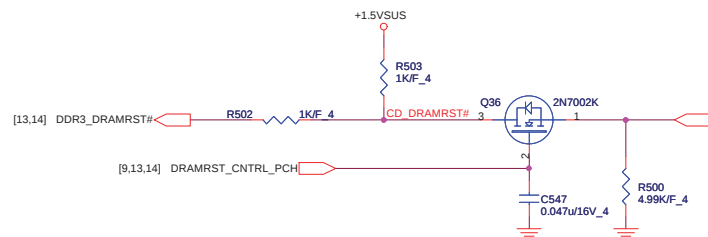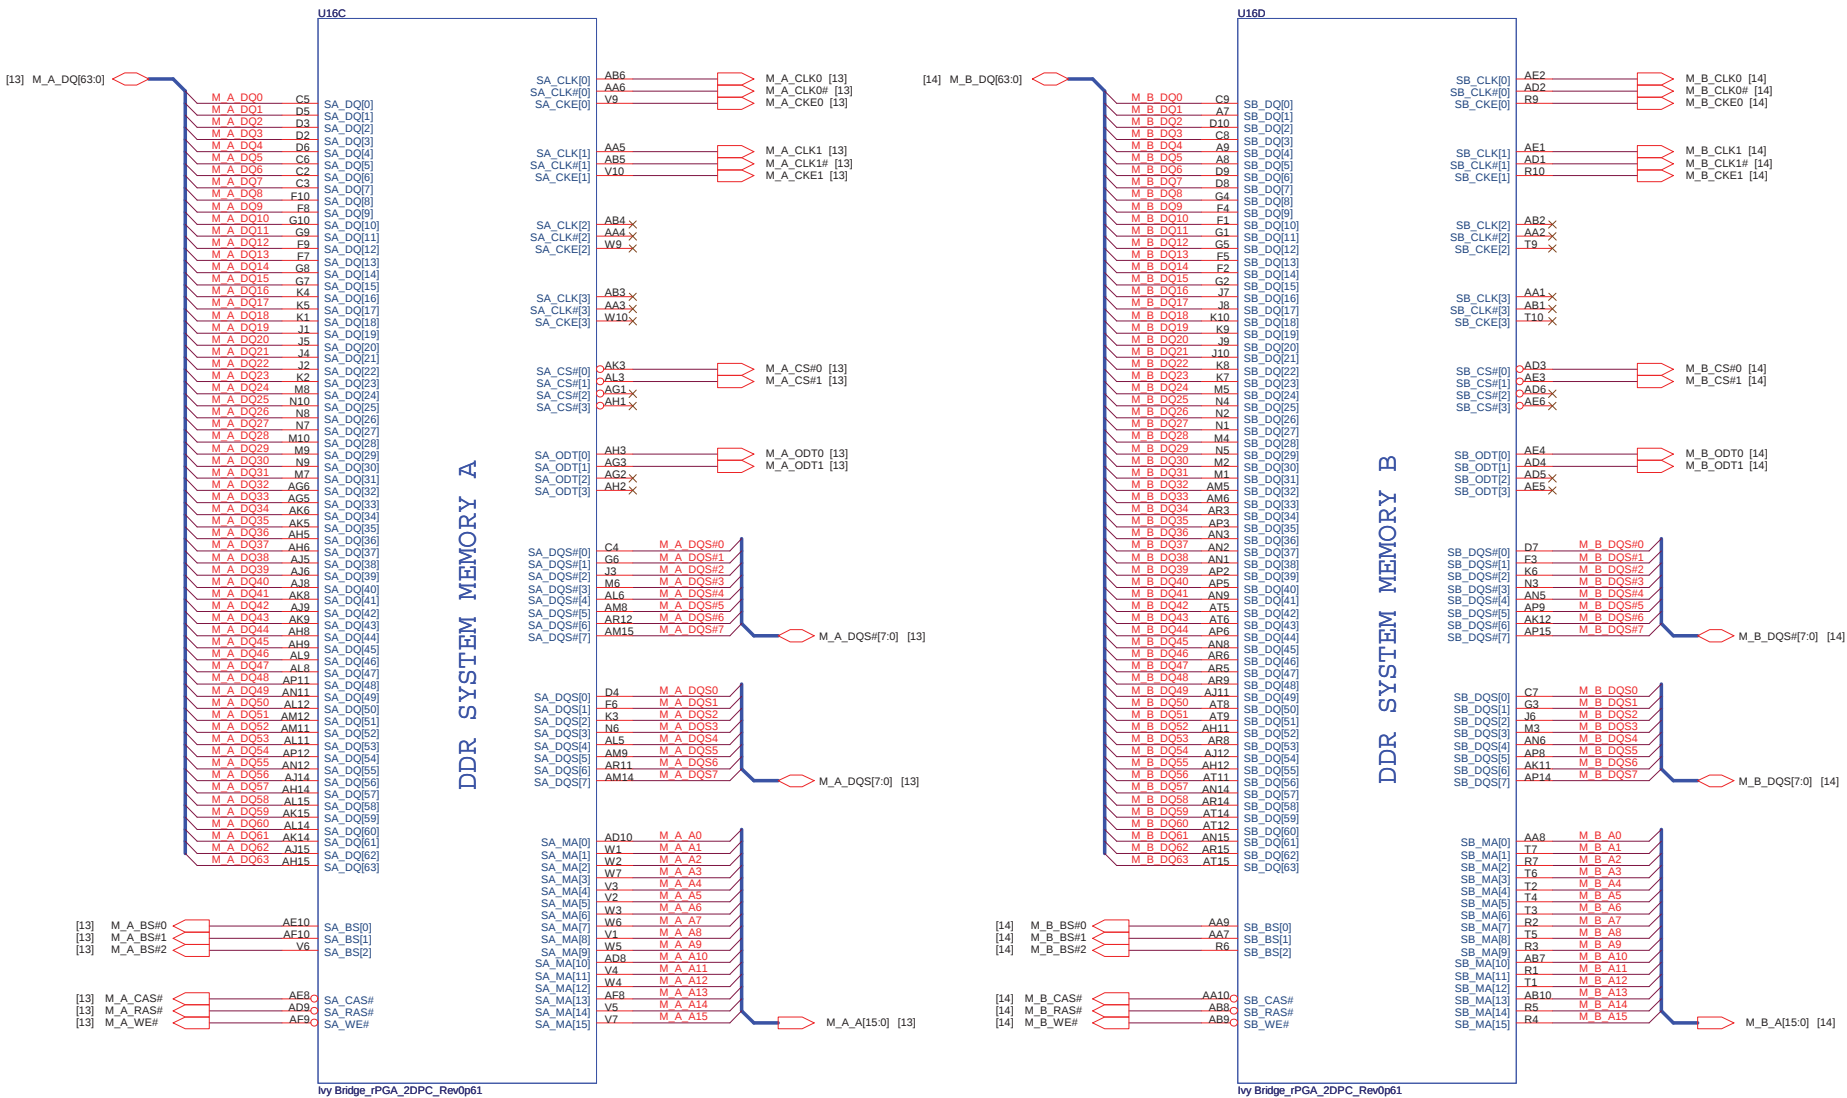


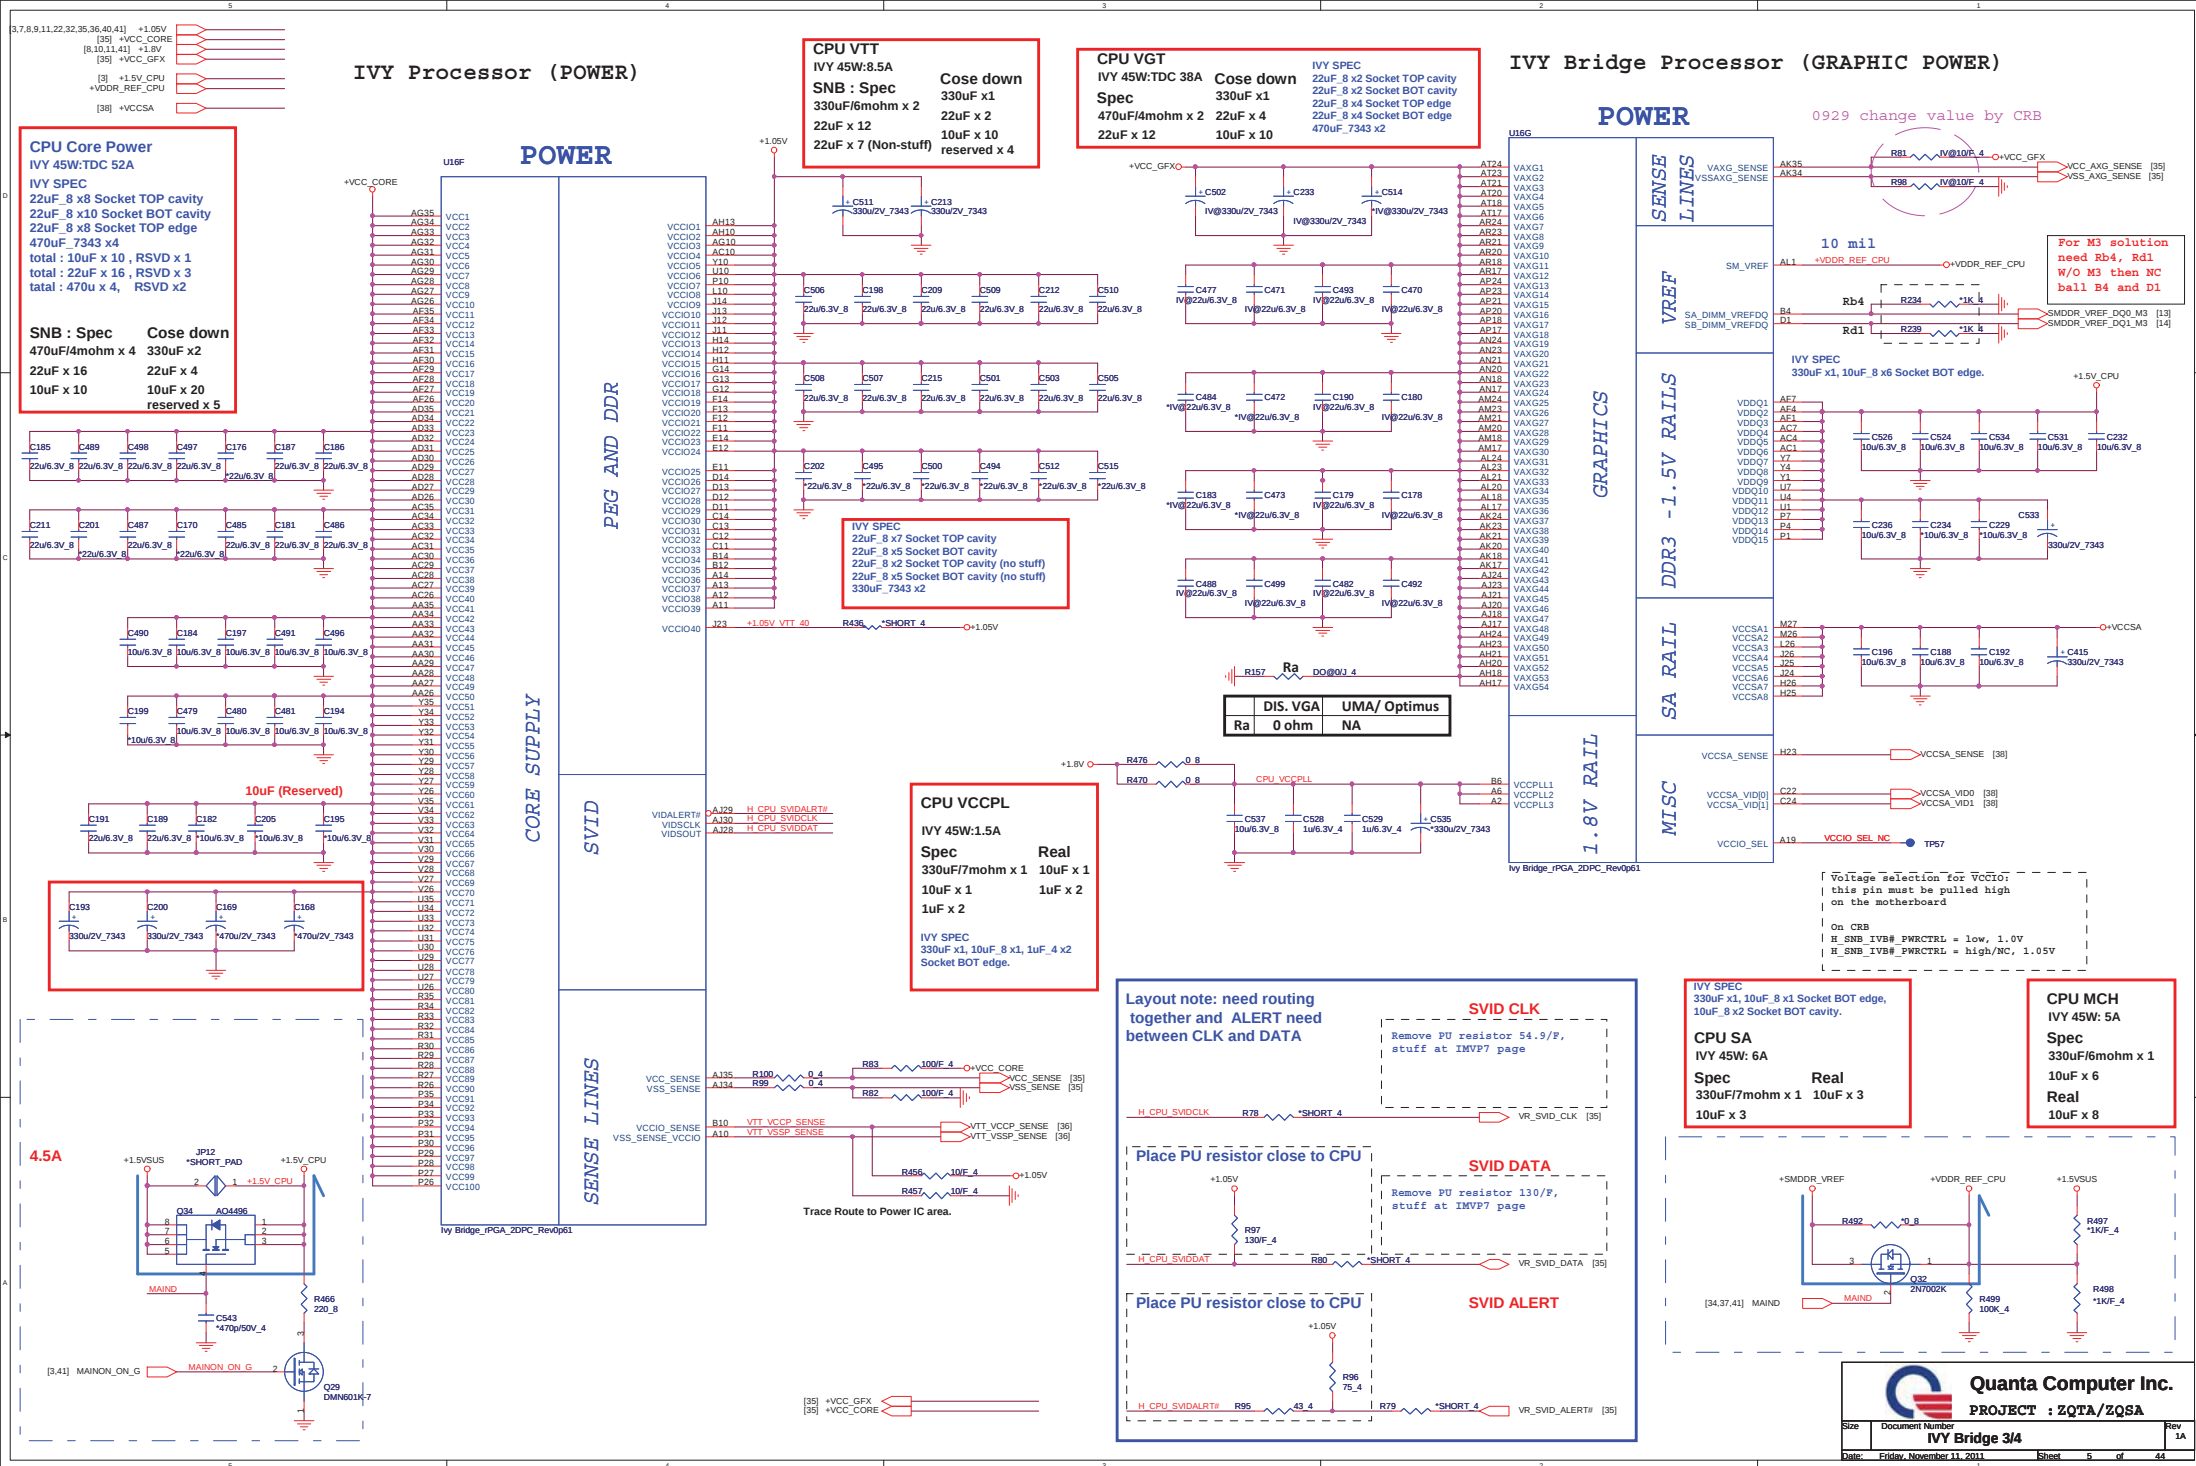

IVY Bridge Processor (GND)

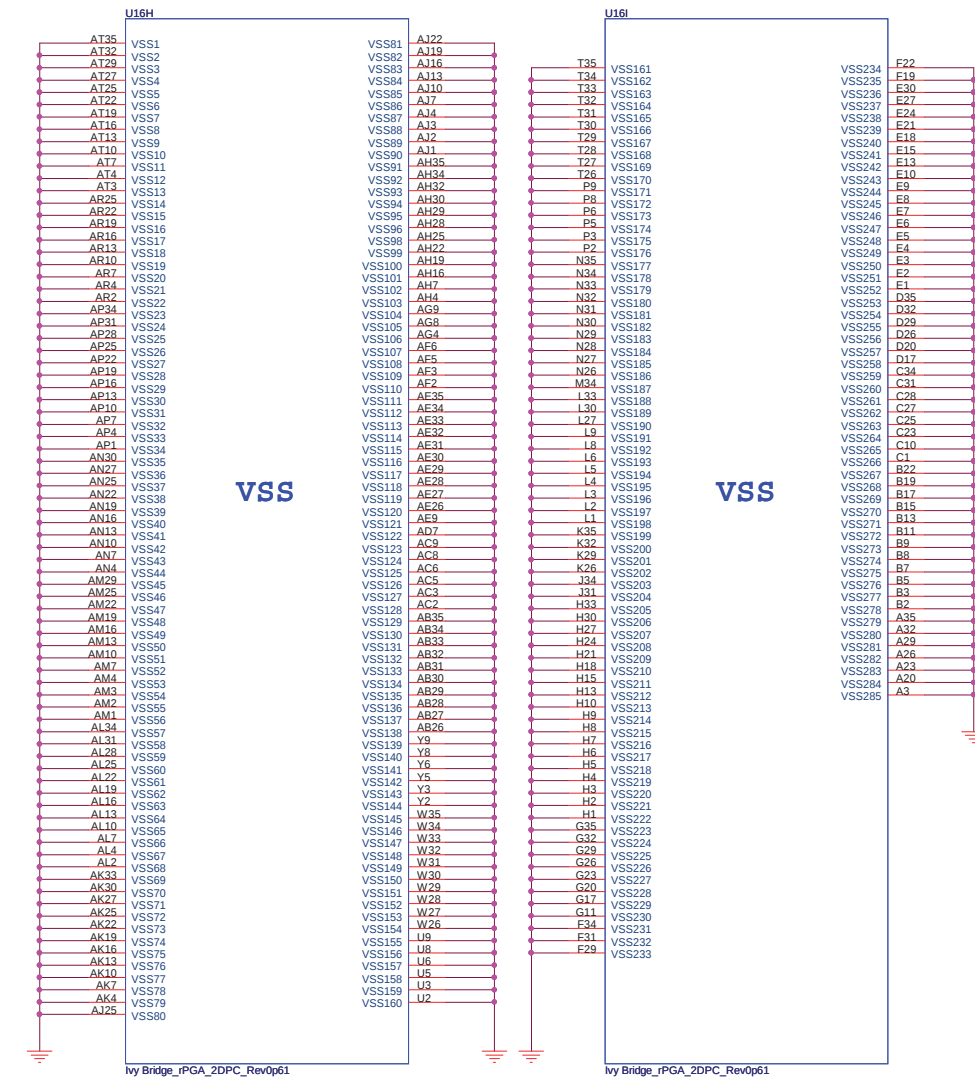

IVY Bridge Processor (RESERVED, CFG)


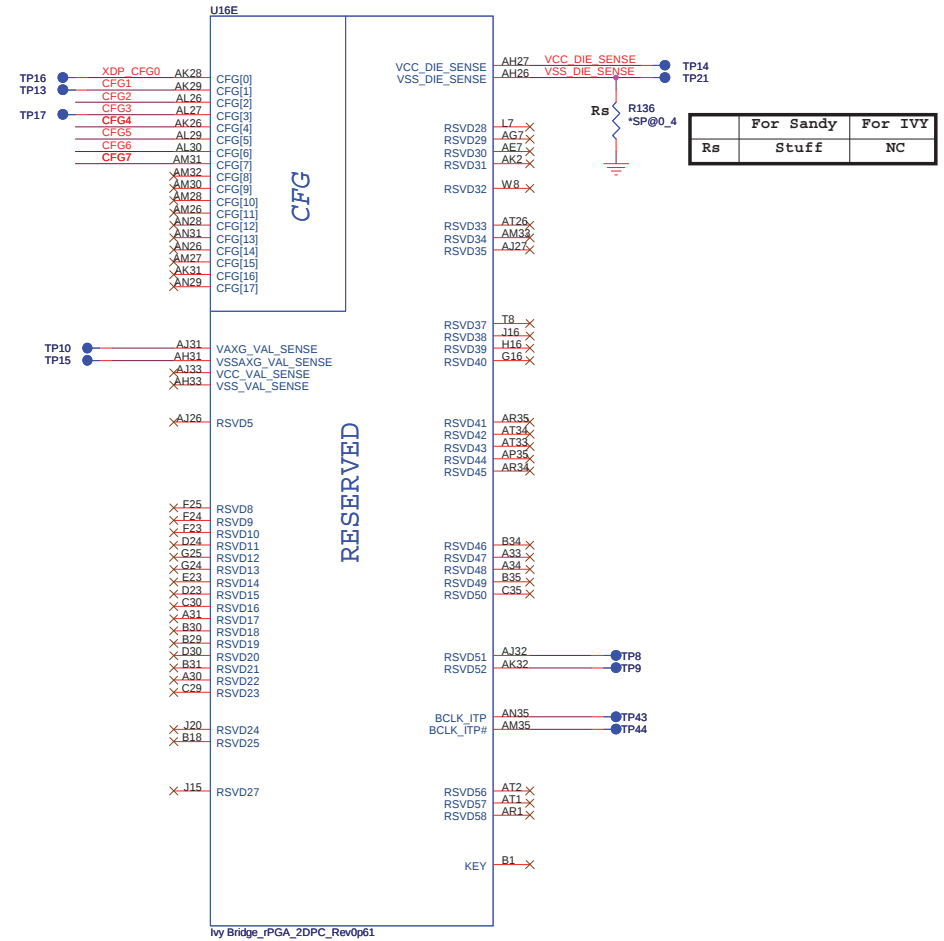


Processor Strapping

The CFG signals have a default value of '1' if not terminated on the board.

	1	0
CFG2 (PEG Static Lane Reversal)	Normal Operation	Lane Reversed
CFG4 (DP Presence Strap)	Disable; No physical DP attached to eDP	Enable; An ext DP device is connected to eDP
CFG7 (PEG Defer Training)	PEG train immediately following xxRESETB de assertion	PEG wait for BIOS training

9/26 modify

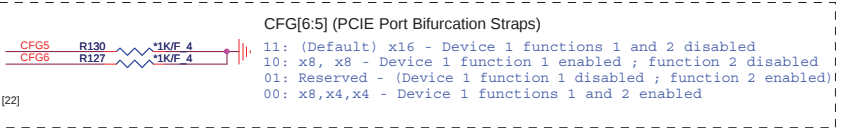

CFG6[5] (PCIe Port Bifurcation Straps)


11: (Default) x16 - Device 1 functions 1 and 2 disabled
 10: x8, x8 - Device 1 function 1 enabled ; function 2 disabled
 01: Reserved - (Device 1 function 1 disabled ; function 2 enabled)
 00: x8,x4,x4 - Device 1 functions 1 and 2 enabled



Quanta Computer Inc.
PROJECT : ZQTA/ZQSA

Size	Document Number	Rev
	IVY Bridge 4/4	1A

Date: Friday, November 11, 2011 Sheet 6 of 44

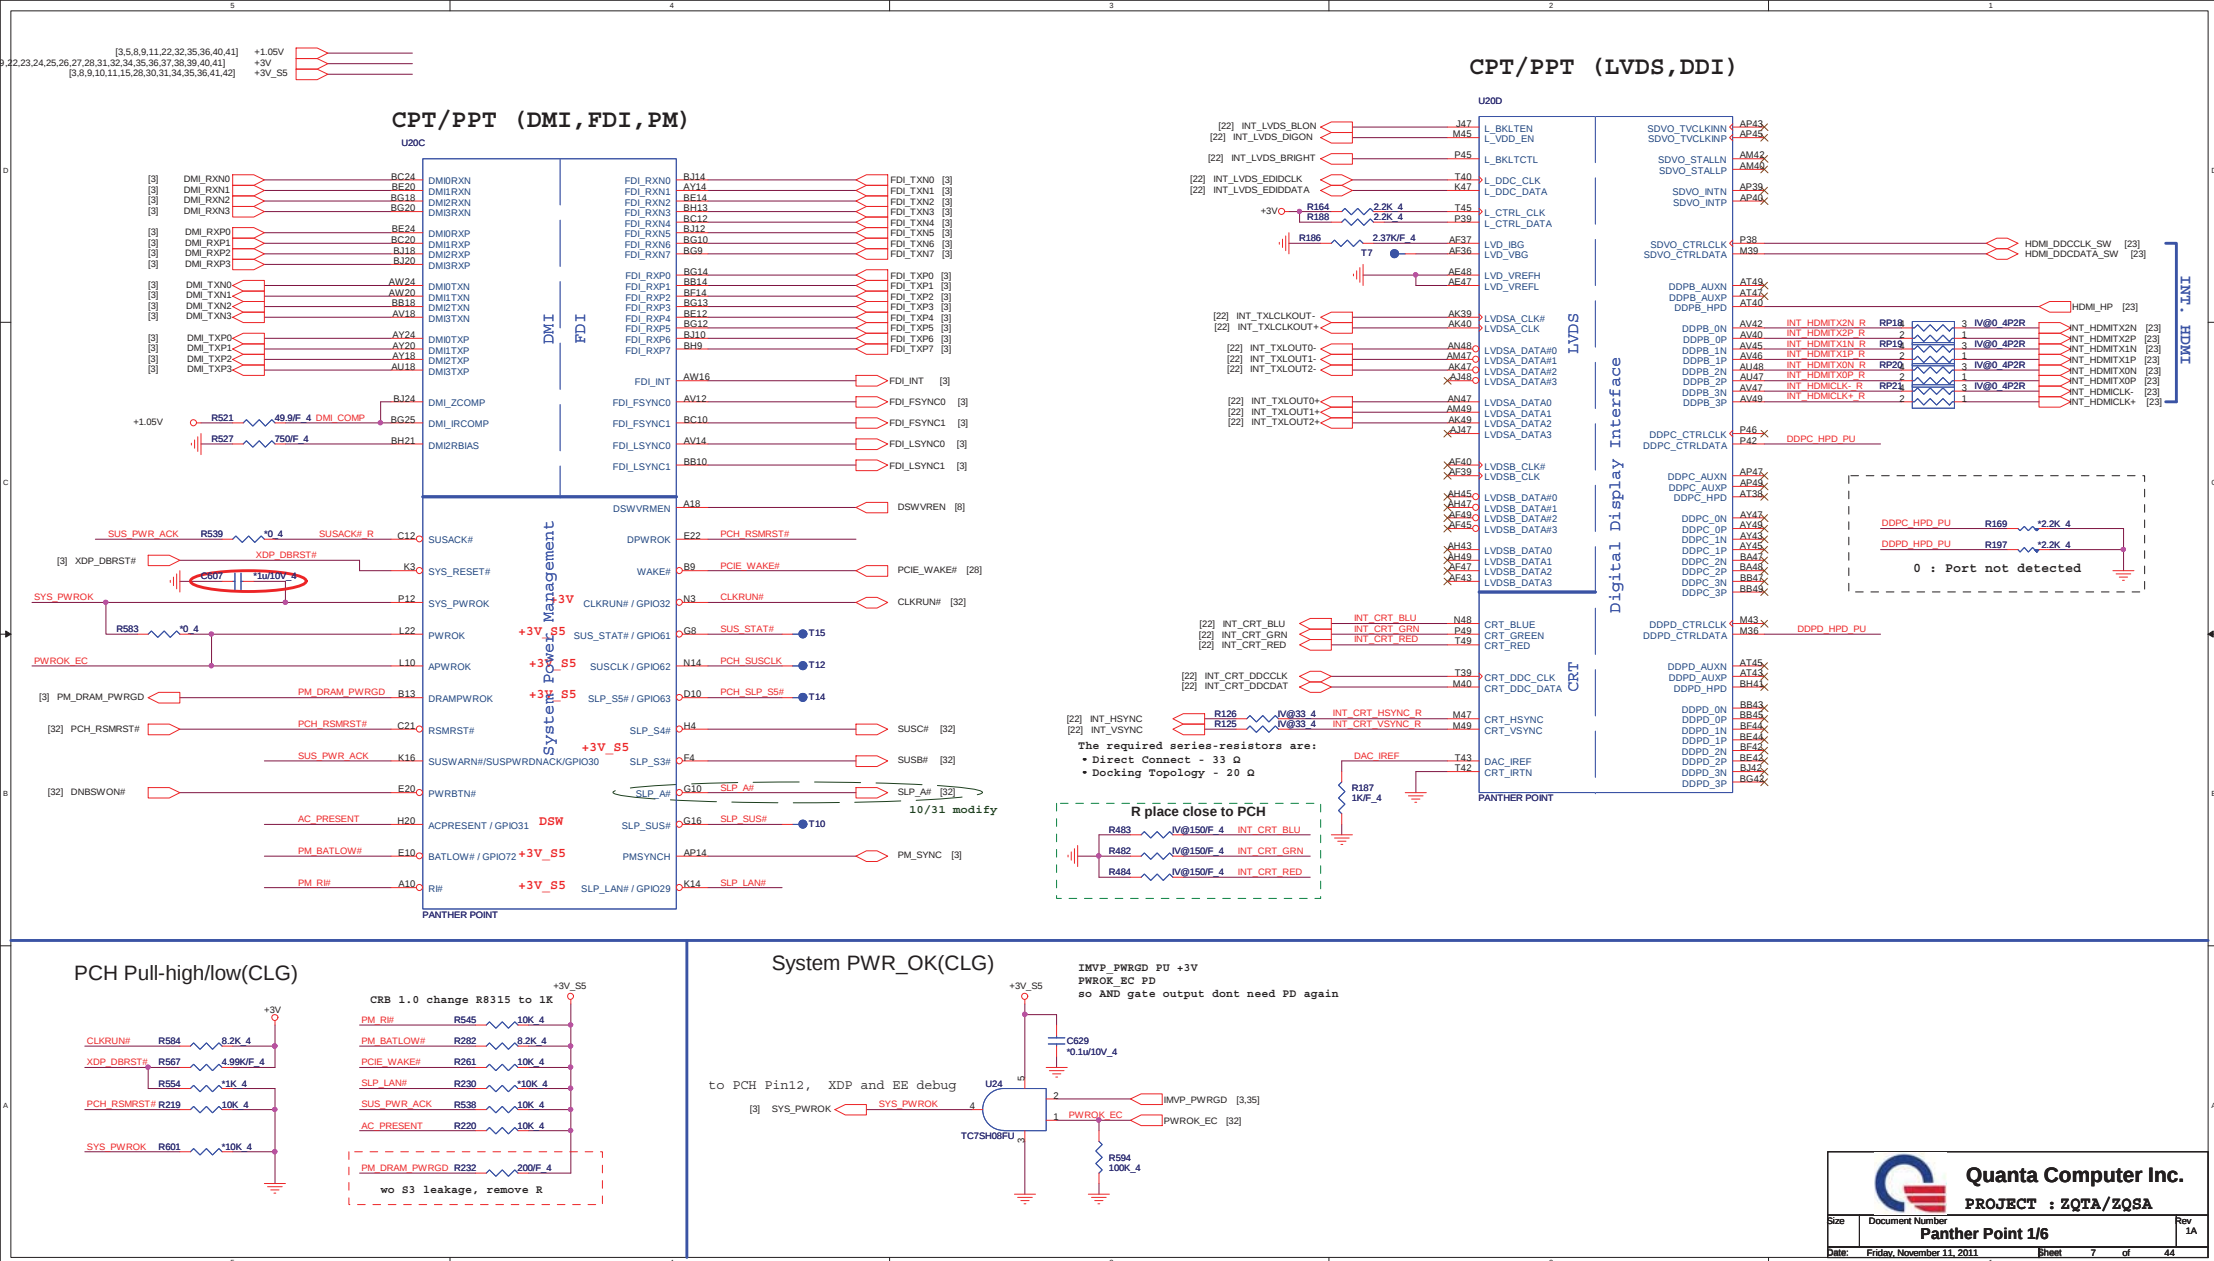

20mils







[22,25,30,31,32,33,34,41,42] +3VPCU
 [11,22,23,25,26,31,34,41] +5V
 [3,7,9,10,11,15,28,30,31,34,35,36,41,42] +3V_S5

 [3,5,7,9,11,22,32,35,36,40,41] +1.05V
 5,26,27,28,31,32,34,35,36,37,38,39,40,41] +3V
 [5,10,11,41] +1.8V


CPT/PPT (HDA, JTAG, SATA)




Pin Name	Strap description	Sampled	Configuration										
SPKR	No reboot mode setting	PWROK	0 = Default (weak pull-down 20K) 1 = Setting to No-Reboot mode	+3V _{CC} 									
GNT3# / GPIO55	Top-Block Swap Override	PWROK	0 = "top-block swap" mode 1 = Default (weak pull-up 20K)	 R171 *1K 4 PCH_GNT3# [9]									
INTVRMEN	Integrated 1.05V VRM enable	ALWAYS	Should be always pull-up	+3V _{RTC} 									
GNT1# / GPIO51	Boot BIOS Selection 1 [bit-1]	PWROK	<table border="1"><thead><tr><th>GNT1#</th><th>GNT0#</th><th>Boot Location</th></tr></thead><tbody><tr><td>1</td><td>1</td><td>SPI *</td></tr><tr><td>0</td><td>0</td><td>LPC</td></tr></tbody></table>	GNT1#	GNT0#	Boot Location	1	1	SPI *	0	0	LPC	
GNT1#	GNT0#	Boot Location											
1	1	SPI *											
0	0	LPC											
GPIO19	Boot BIOS Selection 0 [bit-0]	PWROK											
HDA_SDO	Flash Descriptor Security	RSMRST	0 = effect (default)(weak pull-down 20K) 1 = overridden	32] ME_WR 									
DF_TVS	DMI/FDI Termination voltage	PWROK	0 = Set to Vss (weak pull-down 20K) 1 = Set to Vcc										
GPIO28	On-die PLL Voltage Regulator	RSMRST#	0 = Disable 1 = Enable (weak pull-up 20K)										
HDA_SYNC	On-Die PLL VR Voltage Select	RSMRST	0 = Support by 1.8V (weak pull-down) 1 = Support by 1.5V	+3V _{S5} 									
GPIO15	Intel ME Crypto Transport Layer Security (TLS) cipher suite internal PD	RSMRST	0 = Disable (Default) 1 = Enable	+3V _{S5} 									
DSWVREN	DEEP S4/S5 well On Die DSW VR Enable	DSW	High = Enable (Default) Low = Disable	+3V _{RTC} 									
NV_ALE	Intel Anti-Theft HDD protection Only for Interposer	PWROK	0 = Disable (Internal pull-down 20kohm)	+1.8V _{CC} 									

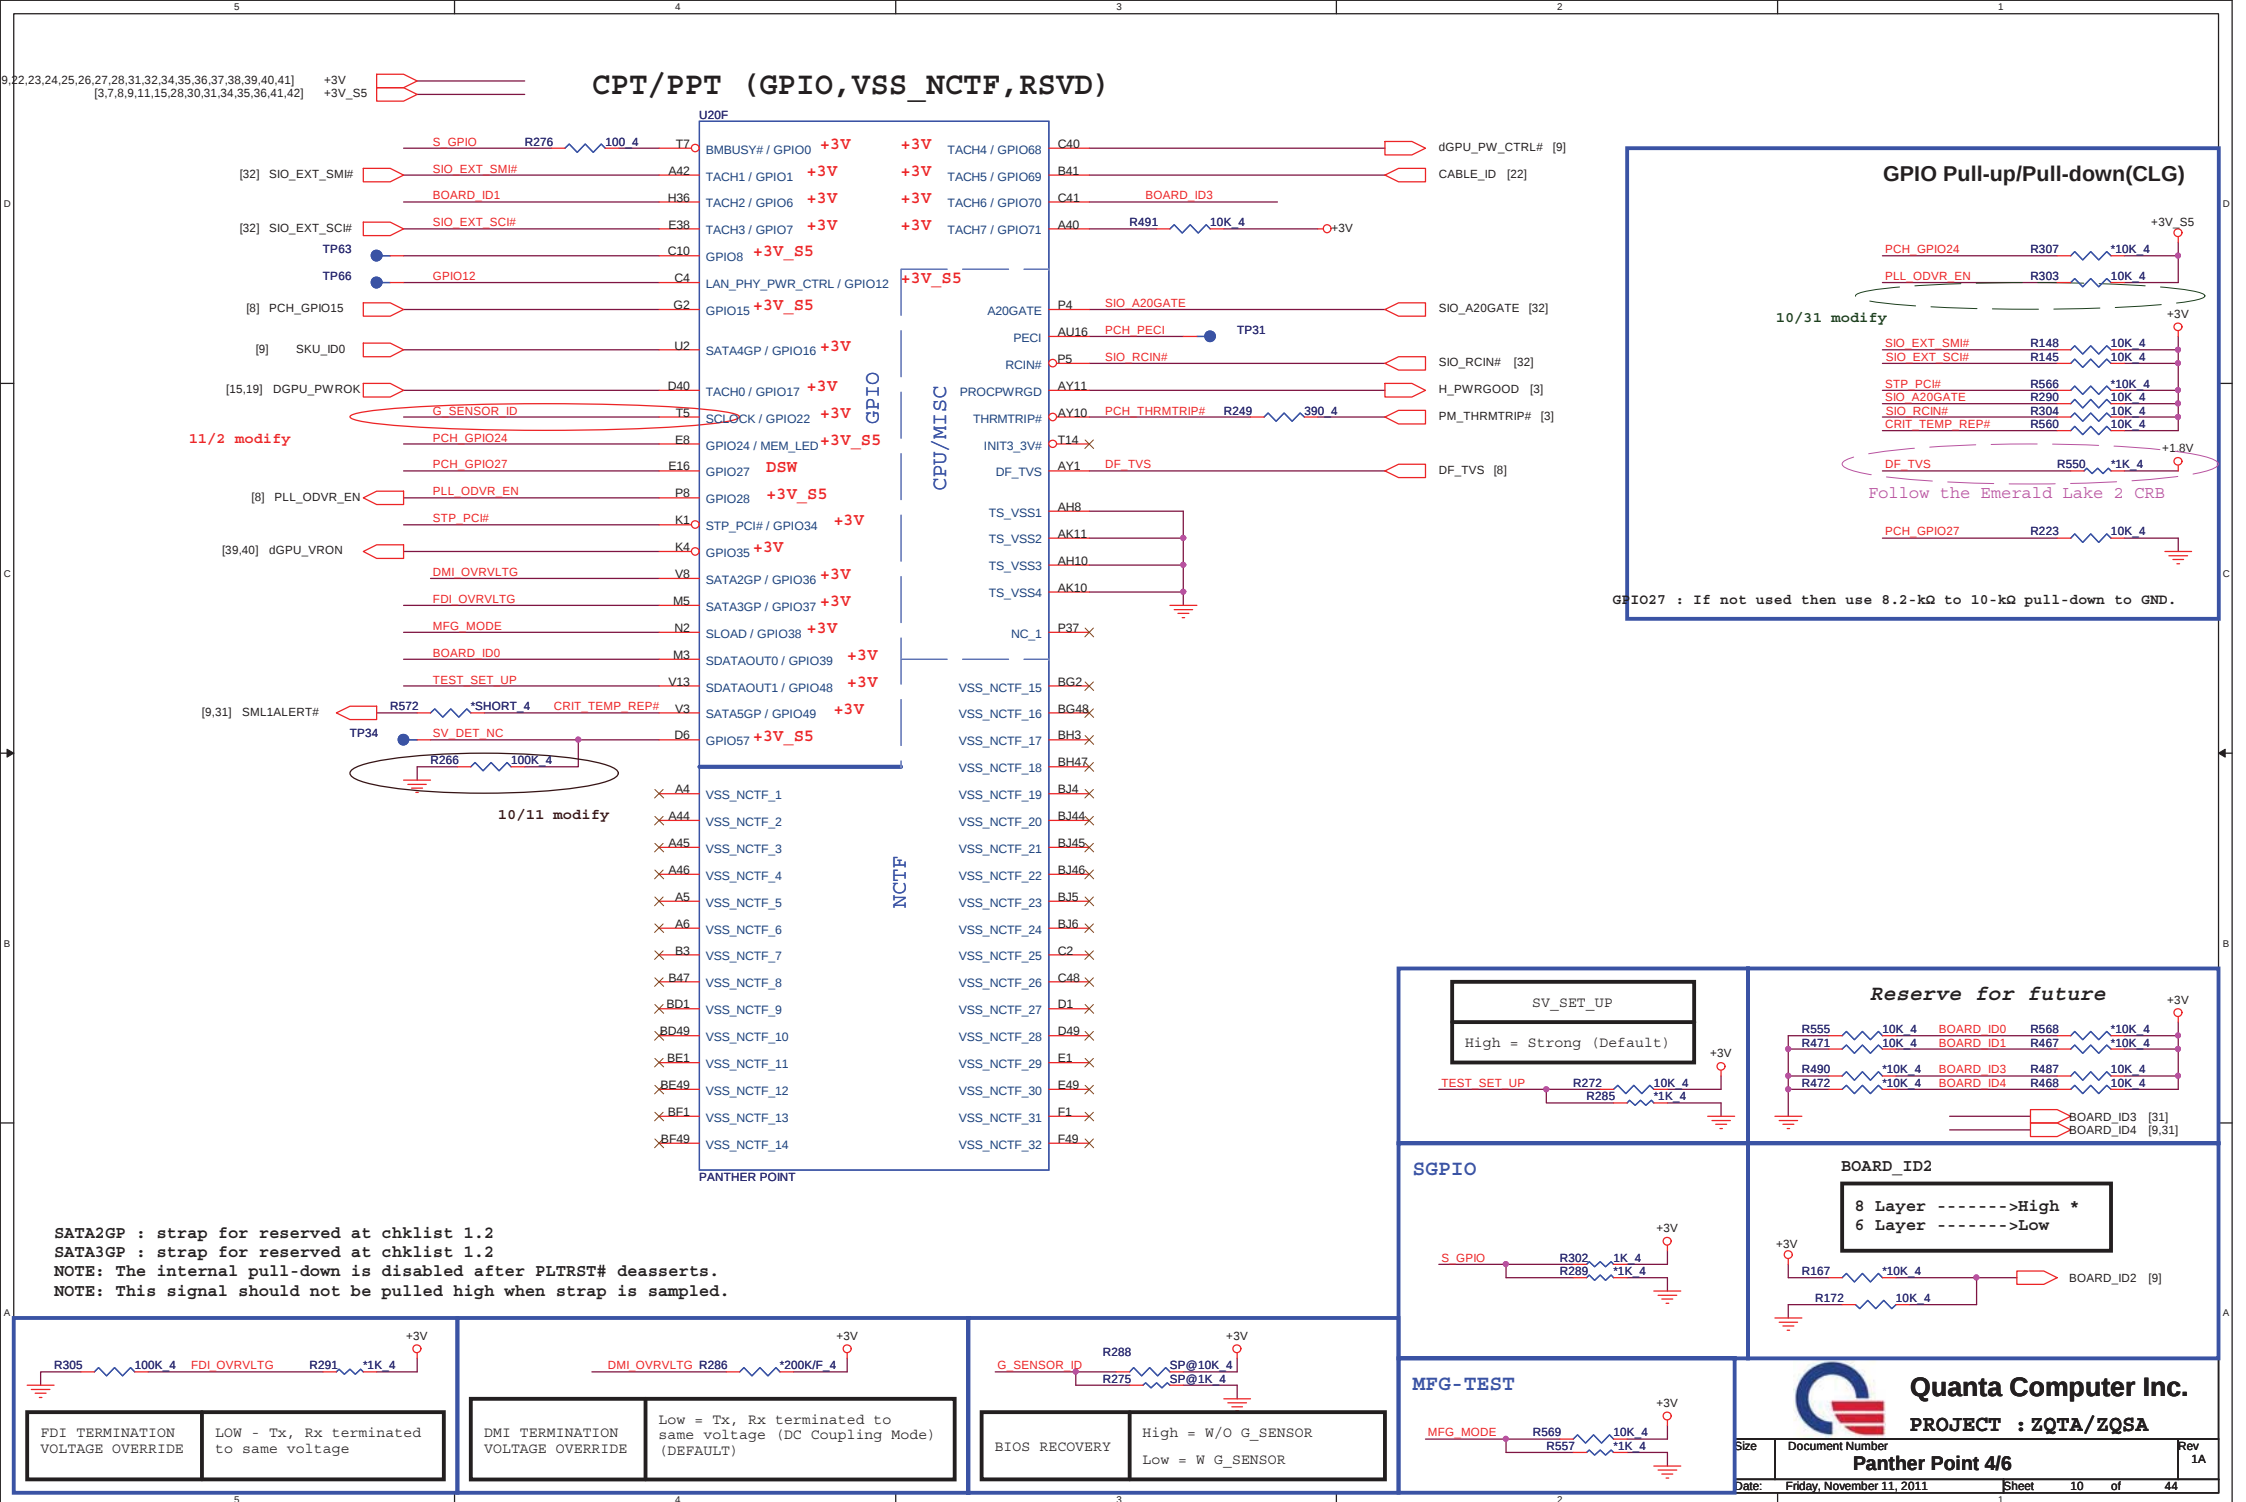



CPT/PPT (POWER)

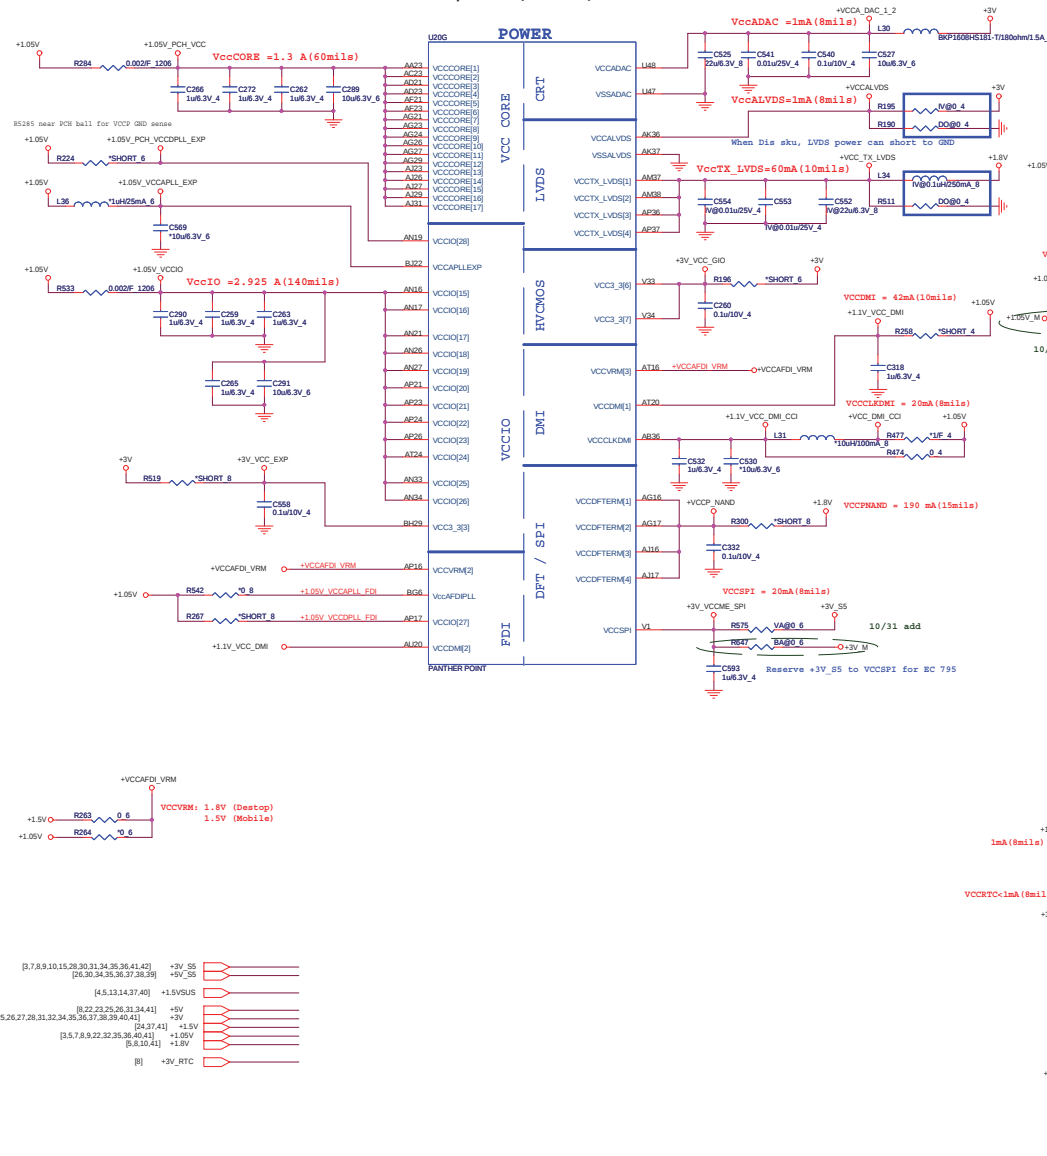



CPT/PPT (POWER)

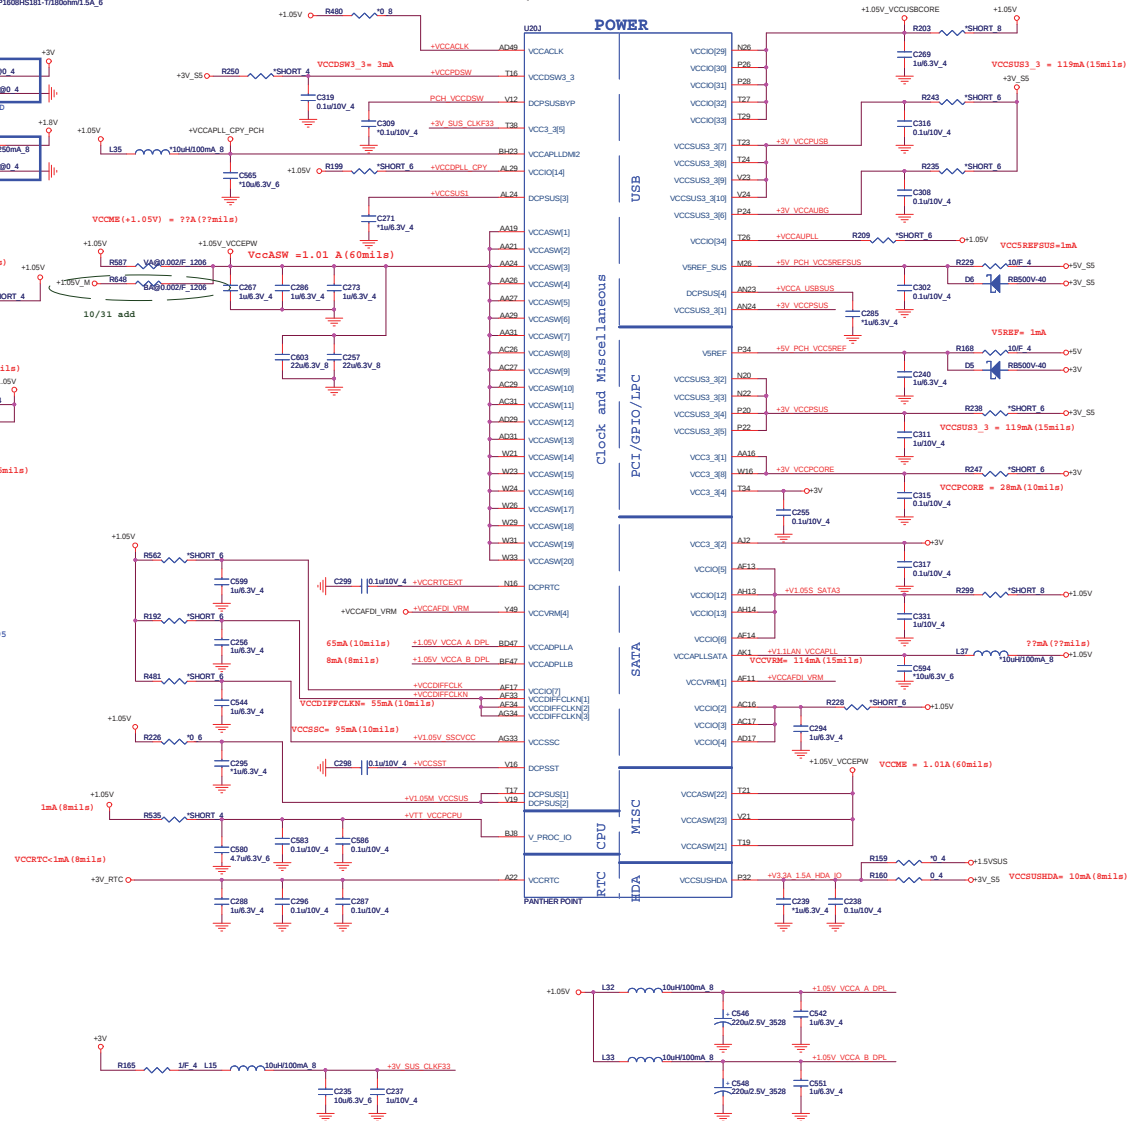

IBEX PEAK-M (GND)

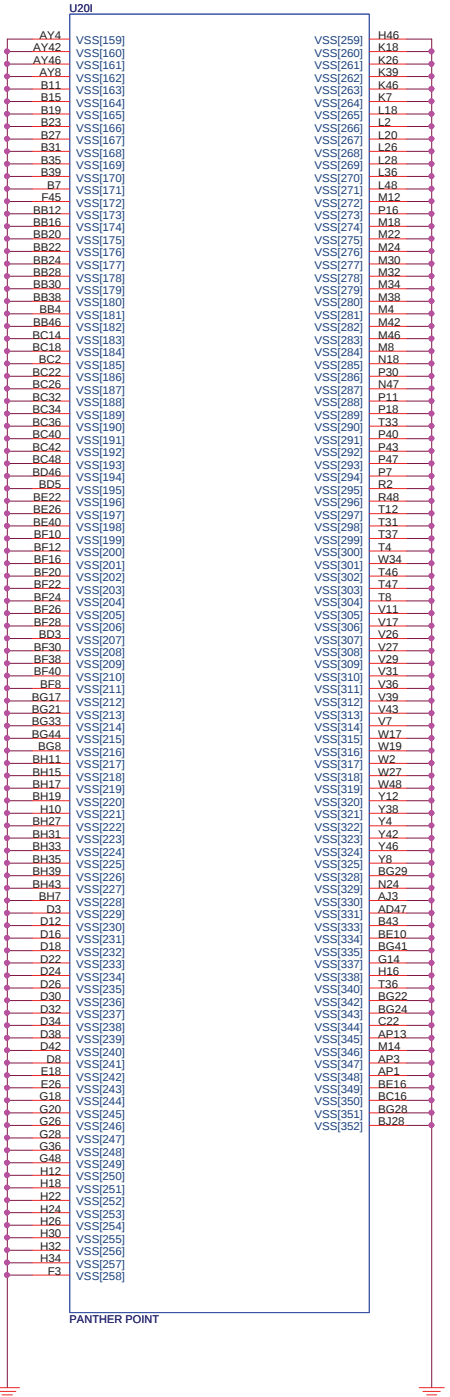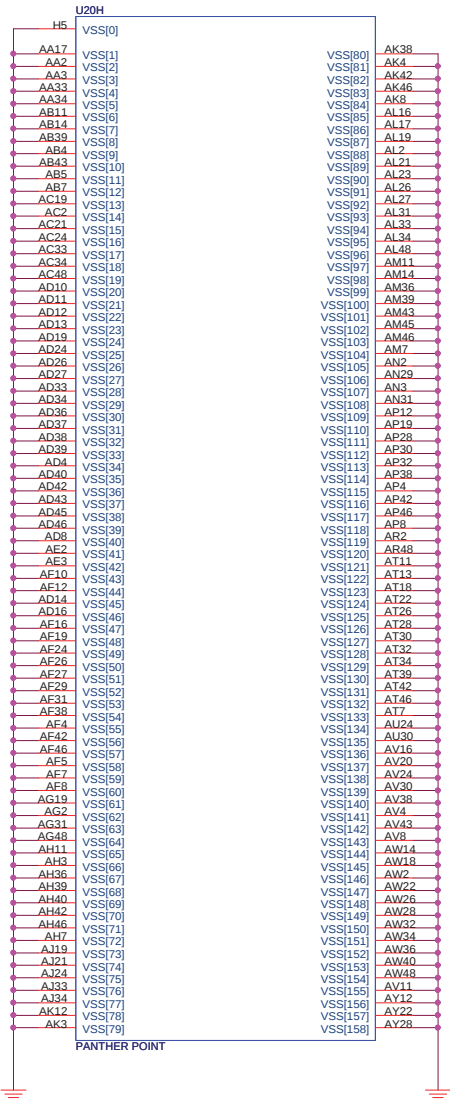


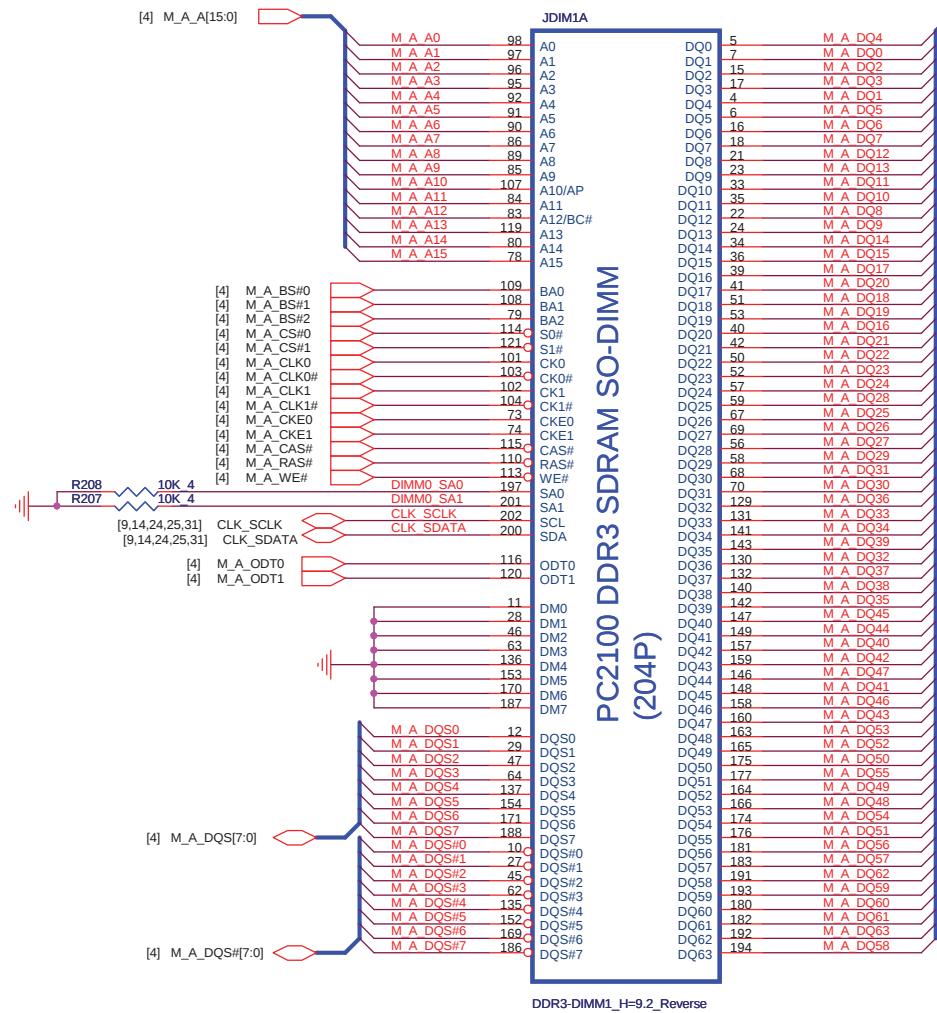

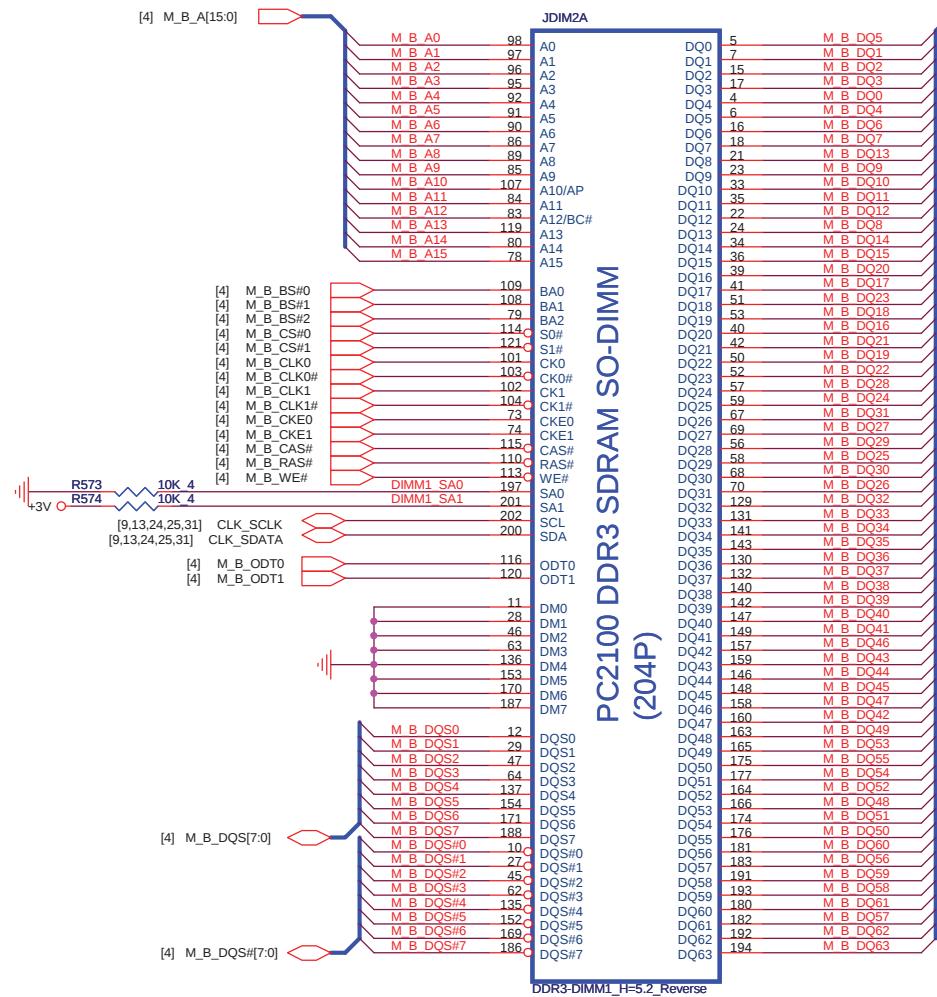


M3 solution



[5] SMDDR_VREF_DQ1_M3




2.48A

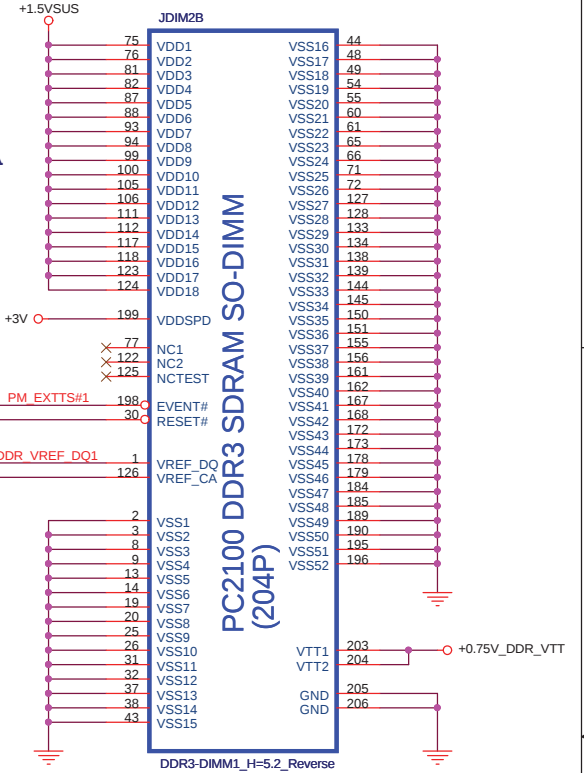


Place these Caps near So-Dimm1.

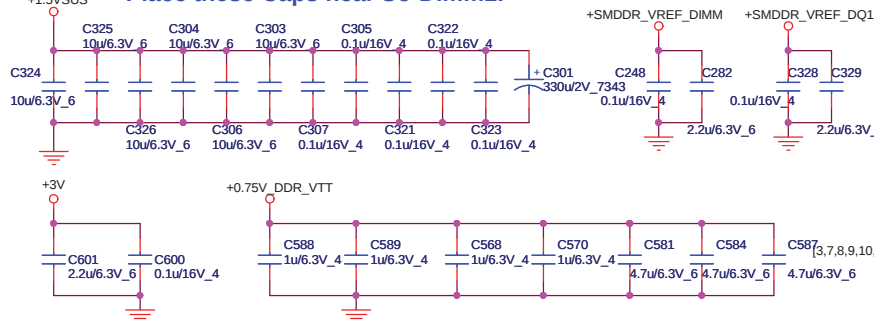

M1 solution

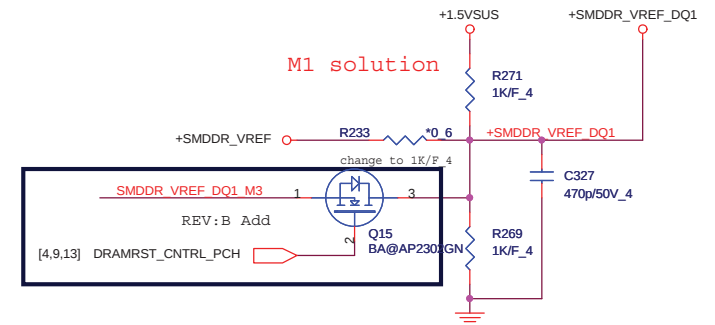

Quanta Computer Inc.
PROJECT : ZQTA/ZQSA

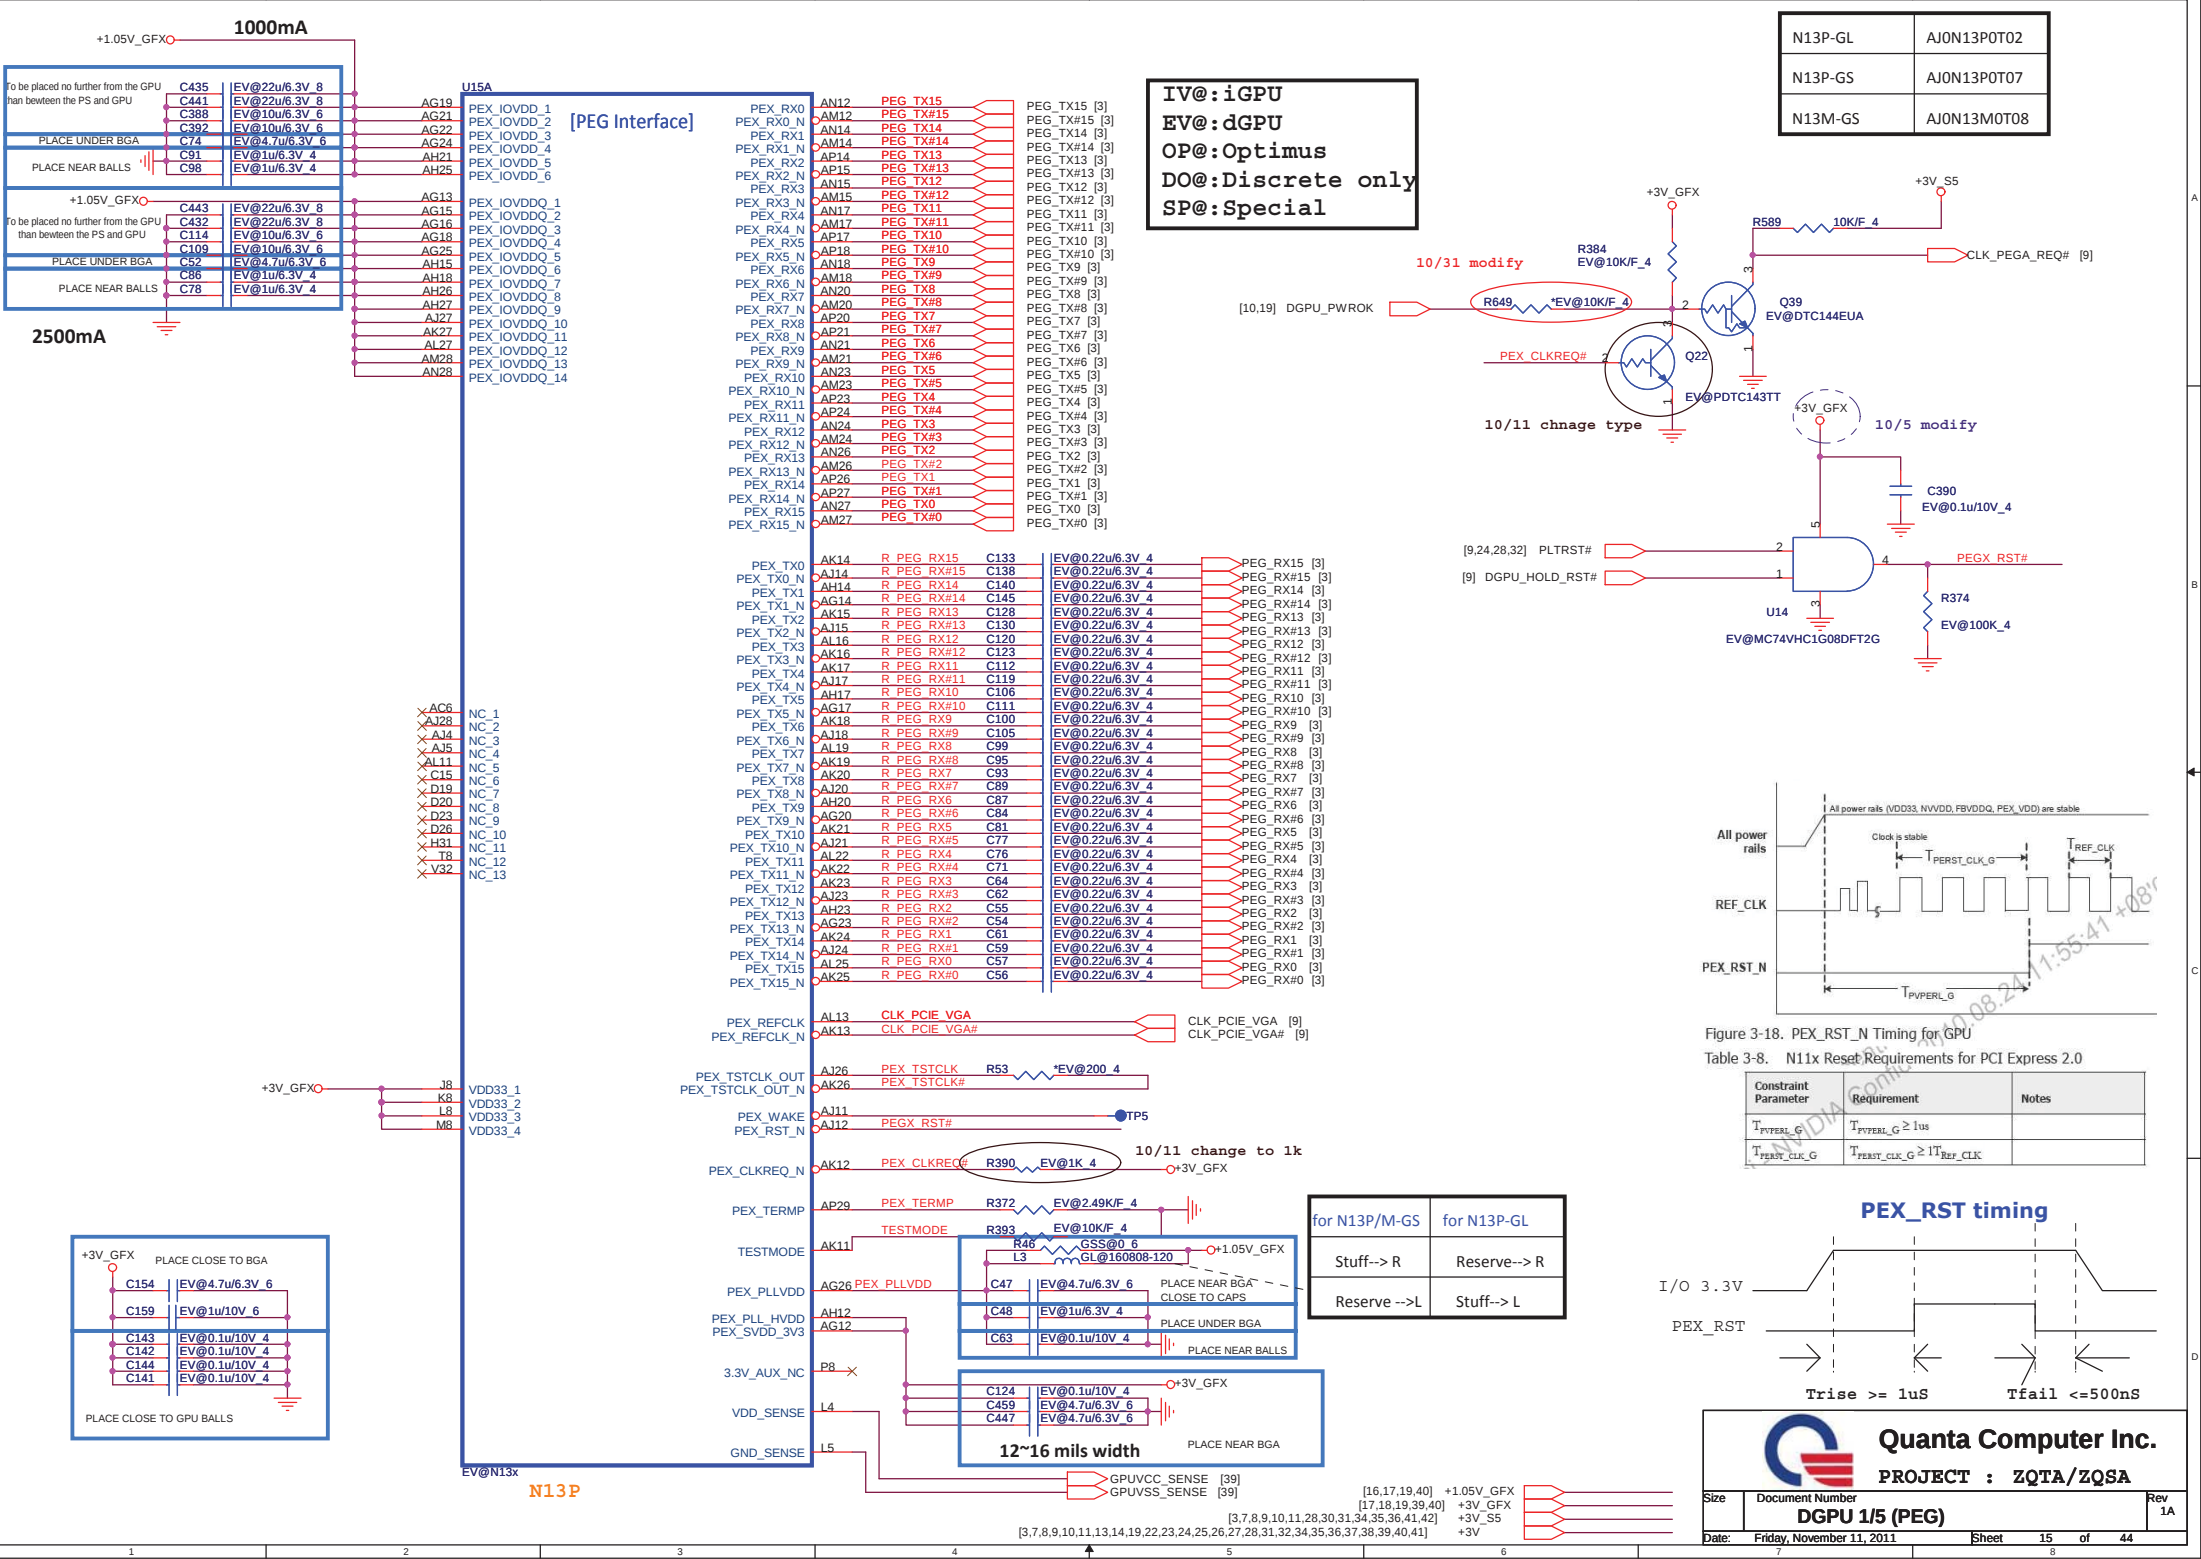

N13P-GL	AJON13P0T02
N13P-GS	AJON13P0T07
N13M-GS	AJON13M0T08

IV@:iGPU
EV@:dGPU
OP@:Optimus
DO@:Discrete only
SP@:Special



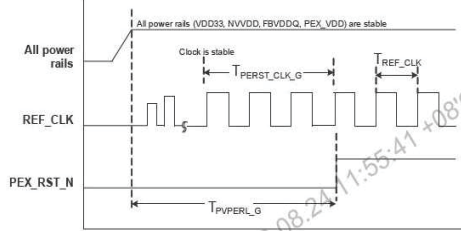







Figure 3-18. PEX_RST_N Timing for GPU
Table 3-8. N11x Reset Requirements for PCI Express 2.0

Constraint Parameter	Requirement	Notes
T _{FWPERL_G}	T _{FWPERL_G} ≥ 1μs	
T _{PERST_CLK_G}	T _{PERST_CLK_G} ≥ 1T _{REF_CLK}	





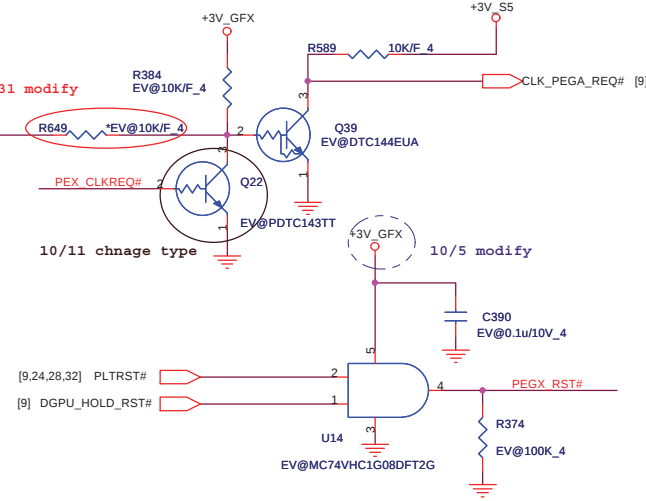
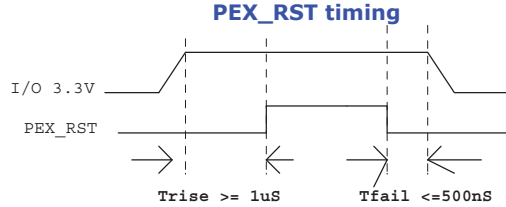


Quanta Computer Inc.
PROJECT : ZQTA/ZQSA

Size	Document Number	Rev
	DGPU 1/5 (PEG)	1A
Date:	Friday, November 11, 2011	Sheet 15 of 44



AN6		EV_TXLCLK- [22]
AN6		EV_TXLCLK+ [22]
AN3		EV_TXLOUT0- [22]
AP3		EV_TXLOUT0+ [22]
AM5		EV_TXLOUT1- [22]
AN5		EV_TXLOUT1+ [22]
AK6		EV_TXLOUT2- [22]
AL6		EV_TXLOUT2+ [22]
AH6	X	
AJ6	X	

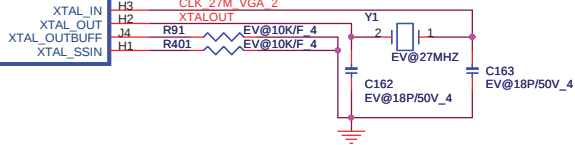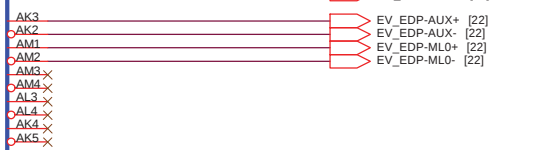

```
IV@:iGPU
EV@dGPU
OP@:Optimus
DO@:Discrete only
SP@:Special
```

N13P-GL	AJ0N13P0T02
N13P-GS	AJ0N13P0T07
N13M-GS	AJ0N13M0T08




[15,17,19,39,40] +3V_GFX

Logical Strap Bit Mapping

	PU-VDD	PD
4.99K	1000	0000
10K	1001	0001
15K	1010	0010
20K	1011	0011
24.9K	1100	0100
30.1K	1101	0101
34.8K	1110	0110
45.3K	1111	0111

N13P-GL	AJ0N13P0T02
N13P-GS	AJ001070T00
N13M-GS	AJ001170T00

	Logical Strapping Bit3	Logical Strapping Bit2	Logical Strapping Bit1	Logical Strapping Bit0	
ROM_SO	FB_1	FB_0	SMB_ALT_ADDR	VGA_DEVICE	0001
ROM_SCLK	PCI_DEVID[4]	SUB_VENDOR	PCI_DEVID[5]	PEX_PLL_EN_TERM	1010
ROM_SI	RAMCFG[3]	RAMCFG[2]	RAMCFG[1]	RAMCFG[0]	XXXX
STRAP0	USER[3]	USER[2]	USER[1]	USER[0]	1111
STRAP1	3GIO_PADCFG[3]	3GIO_PADCFG[2]	3GIO_PADCFG[1]	3GIO_PADCFG[0]	0110
STRAP2	PCI_DEVID[3]	PCI_DEVID[2]	PCI_DEVID[1]	PCI_DEVID[0]	1110
STRAP3	SOR3_EXPOSED	SOR2_EXPOSED	SOR1_EXPOSED	SOR0_EXPOSED	0010
STRAP4	RESERVED	PCI SPEED CHANGE GEN3	PCI_MAX SPEED	DP_PLL_VDD33	0011

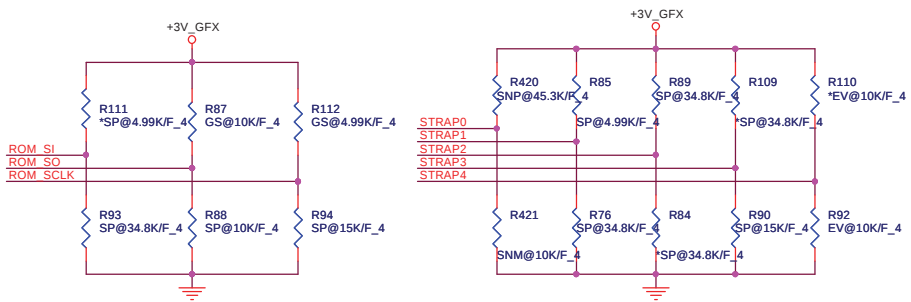

N13P-GS/-GL Strapping table



ROM_SI 1G Hynix 64Mx16 -->15K PD 1G Micron 64Mx16 -->20K PD 2G Hynix 128Mx16 -->35K PD (Default) 2G Micron 128Mx16 -->45K PD	ROM_SO N13P-GL --> 10K PD N13P-GS --> 10K PU	ROM_SCLK N13P-GL (0010) --> 15k PD N13P-GS (1000) --> 4.99K PU
--	--	--

N13M-GS Strapping table


Pin Name	Strap Mapping	Value
ROM_SCLK	SMB_ALT_ADDR	0
ROM_SI	SUB_VENDOR	0
ROM_SO	VGA_DEVICE	0
STRAP[3..0]	RAM_CFG[3..0]	0010(Hynix 64Mx16) 0110(Hynix 128Mx16)
STRAP[4]	PCIE_MAX_SPEED	0

Remark :

0 -> 10K PD
1 -> 10K PU

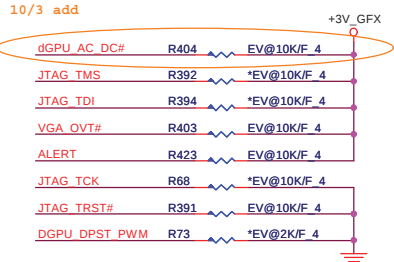
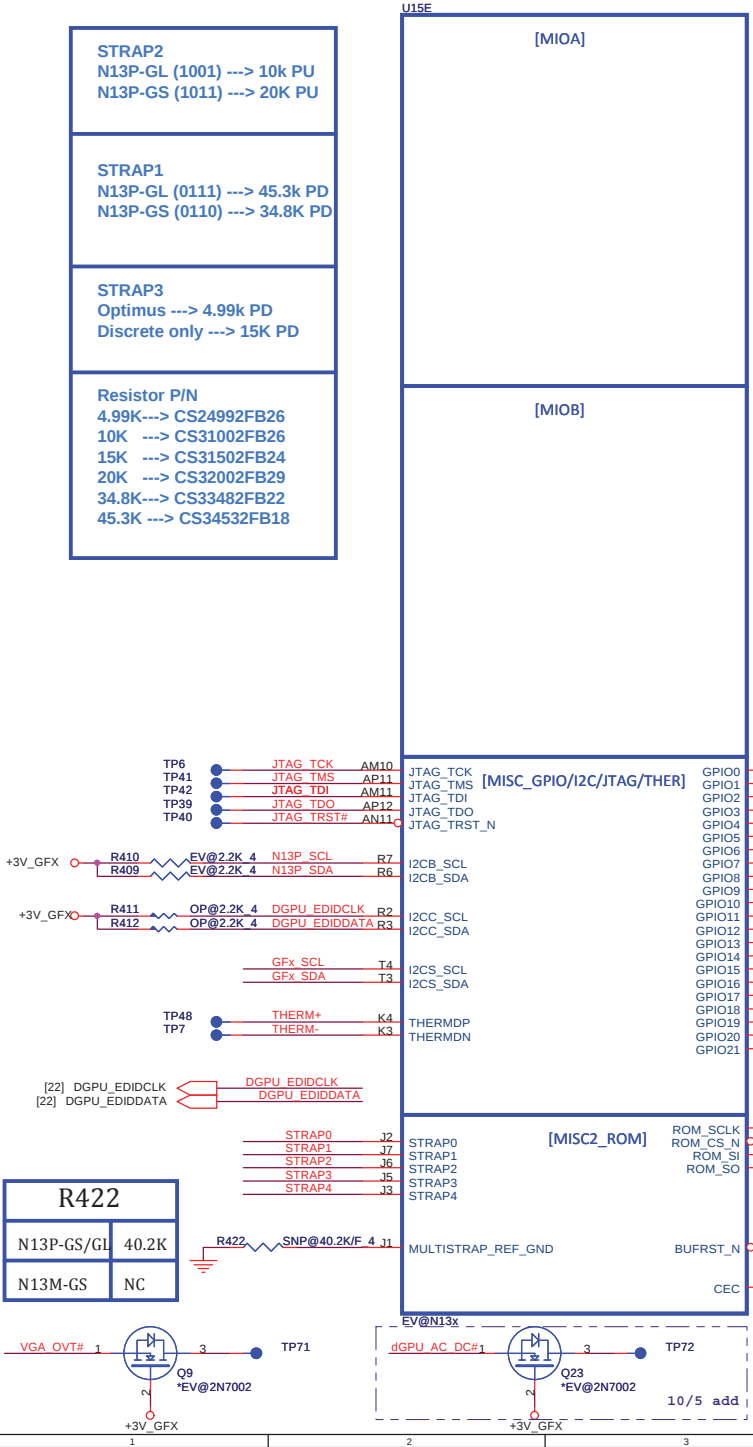


10/3 modify


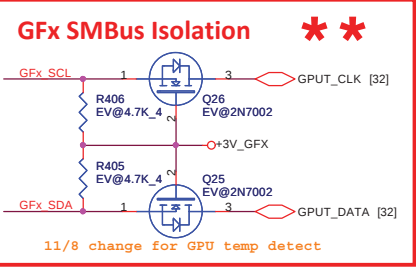


for N13P/M-GS	for N13P- GL
Reserve R108	Stuff R108


N13P-GL	AJON13POT02
N13P-GS	AJON13POT07
N13M-GS	AJON13MOT08

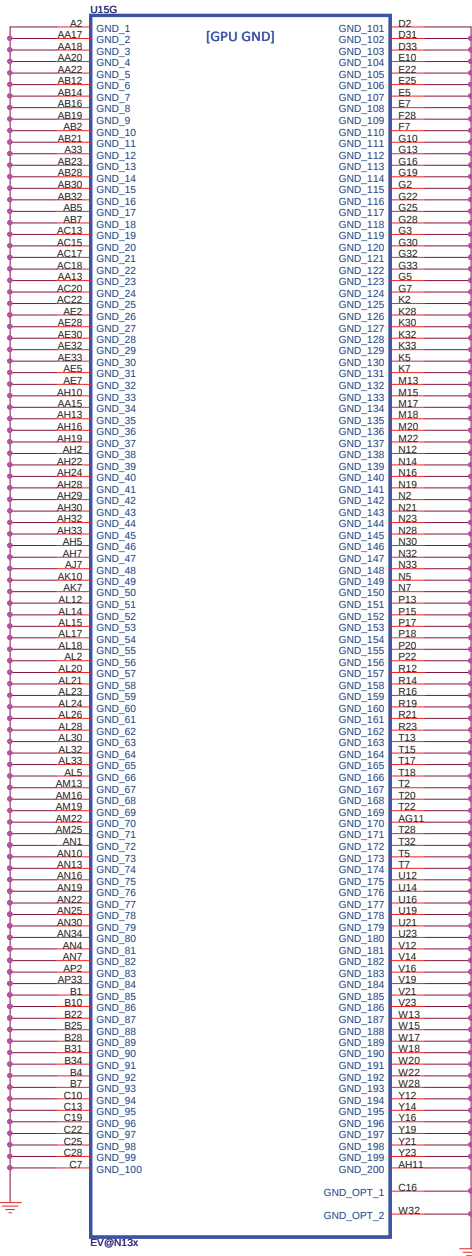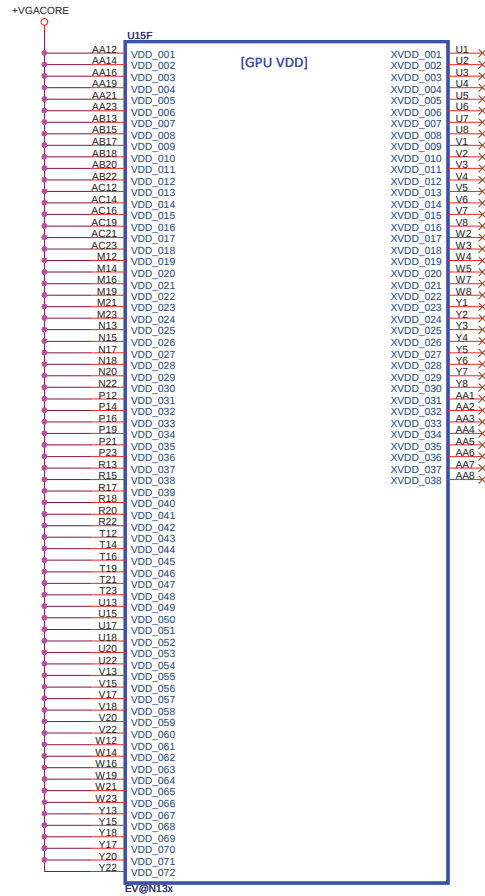




PLACE UNDER GPU

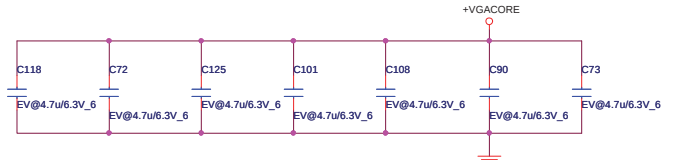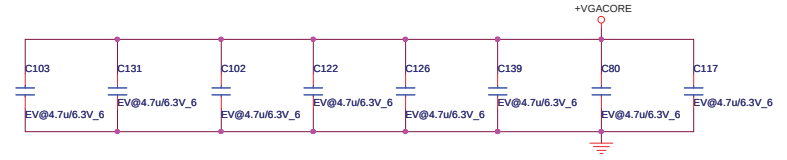

PLACE NEAR GPU

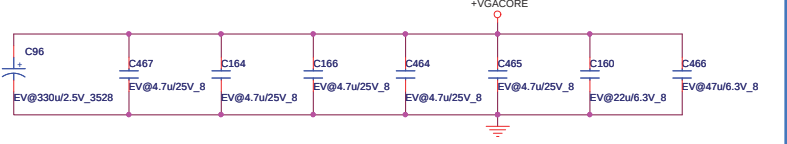


for meet Power down sequence for +3V_GFX

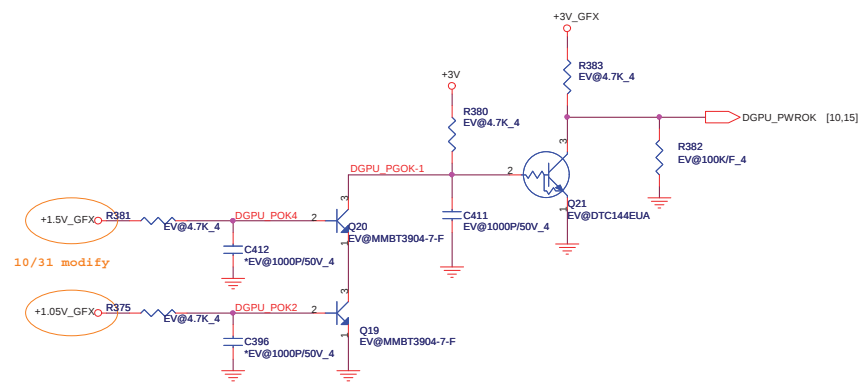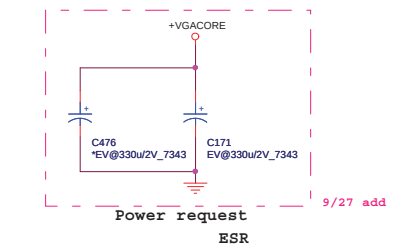

[31,39] +VGACORE
[15,16,17,40] +1.05V_GFX
[16,20,21,40] +1.5V_GFX
[15,17,18,39,40] +3V_GFX
[3,7,8,9,10,11,13,14,22,23,24,25,26,27,28,31,32,34,35,36,37,38,39,40,41] +3V

[16] VMA_DQ[63..0]
[16] VMA_DM[7..0]
[16] VMA_WDQS[7..0]
[16] VMA_RDQS[7..0]

CHANNEL A: 256MB/512MB DDR3

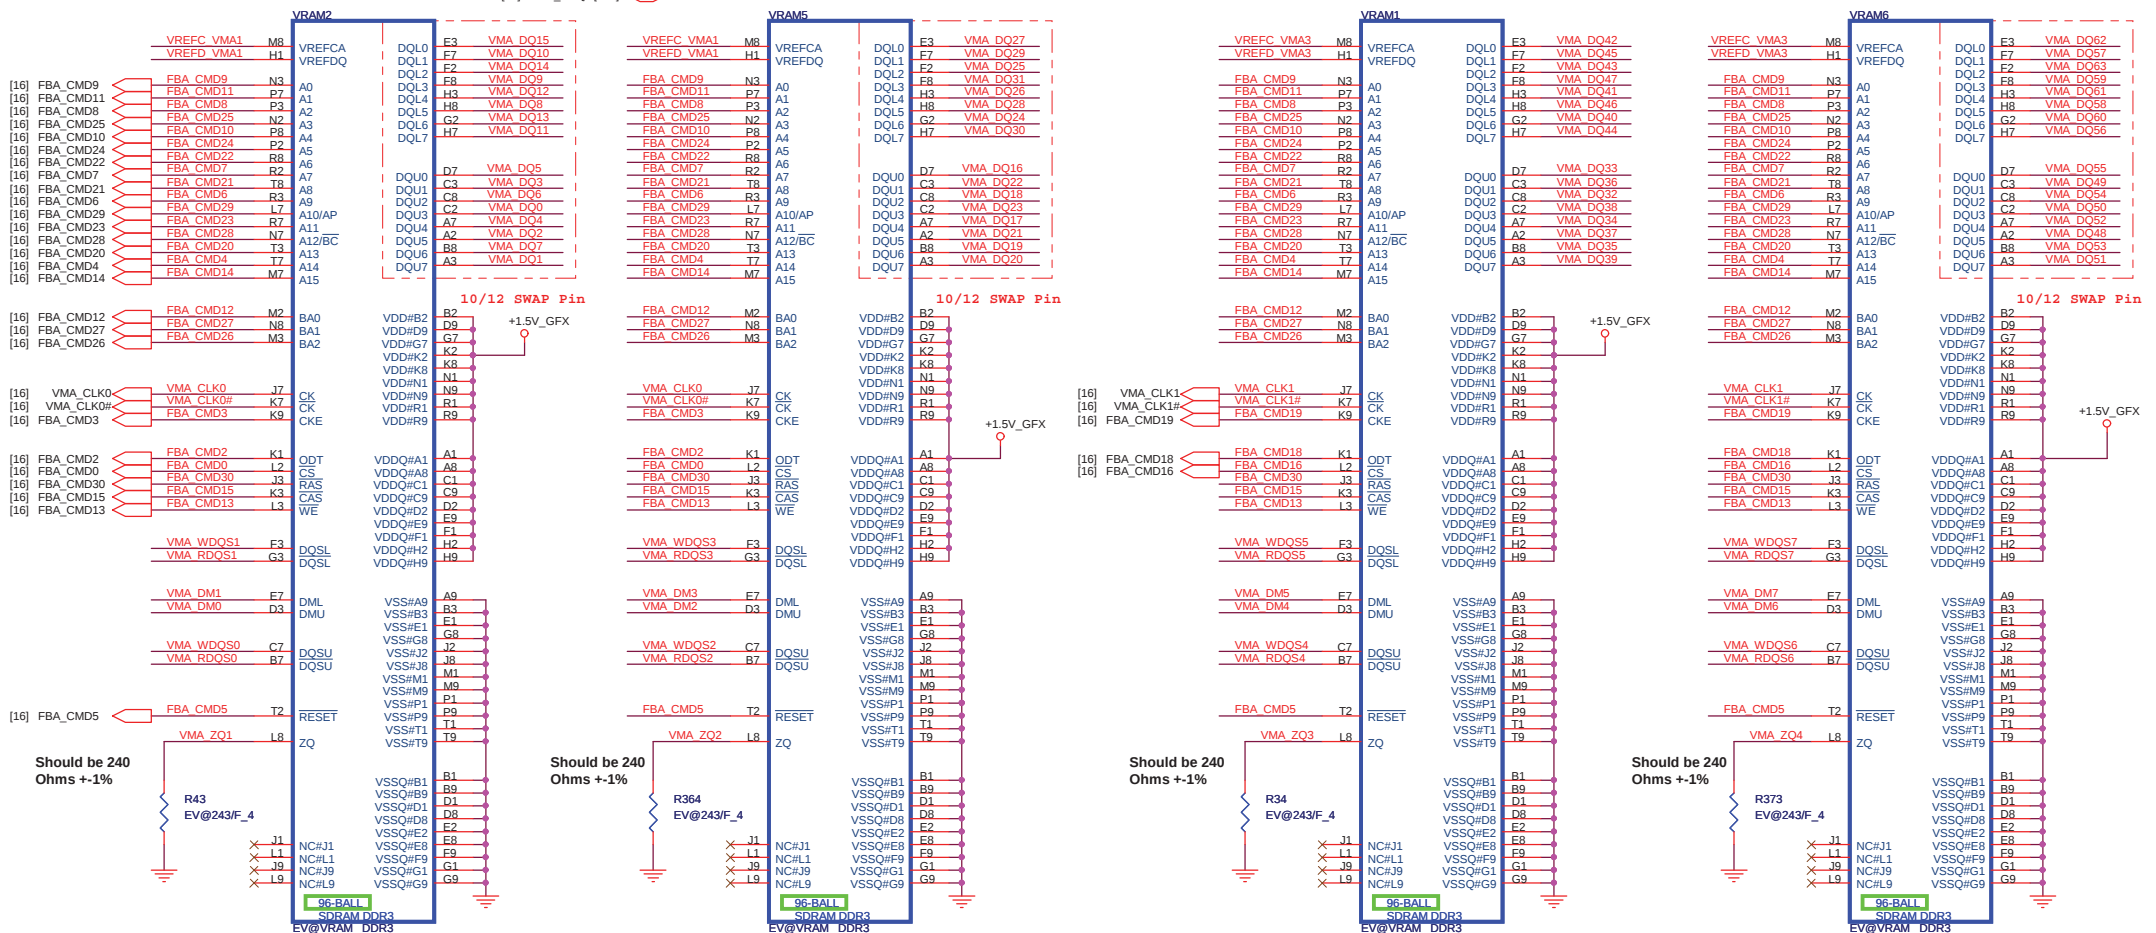

VMA_CLK0
R371 EV@162/F_4
VMA_CLK0#

Fermi : Change to 160 ohm
1 : CS11602JB00 ,RES CHIP 160 1/16W +-5% (0402)
2 : CS11622PB07 ,RES CHIP 162 1/16W +-1% (0402)


[16] FBA_CMD17 FBA_CMD17 TP1
[16] FBA_CMD1 FBA_CMD1 TP2
10/14 modify

VMA_CLK1
R41 EV@162/F_4
VMA_CLK1#

Fermi : Change to 160 ohm
1 : CS11602JB00 ,RES CHIP 160 1/16W +-5% (0402)
2 : CS11622PB07 ,RES CHIP 162 1/16W +-1% (0402)

VMA_CLK1
R370 EV@1.33K/F_4
VMA_CLK1#


Fermi : Change to 160 ohm
1 : CS11602JB00 ,RES CHIP 160 1/16W +-5% (0402)
2 : CS11622PB07 ,RES CHIP 162 1/16W +-1% (0402)

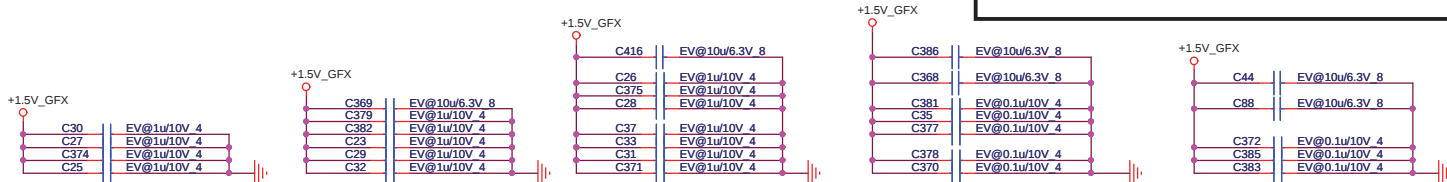

[16] VMC_DQ[63:0]
[16] VMC_DM[7:0]
[16] VMC_WDQS[7:0]
[16] VMC_RDQS[7:0]

CHANNEL B: 256MB/512MB DDR3

HYNIX 900MHz 1G AKD51LZWTW02
HYNIX 900MHz 2G AKD5MGWTW00

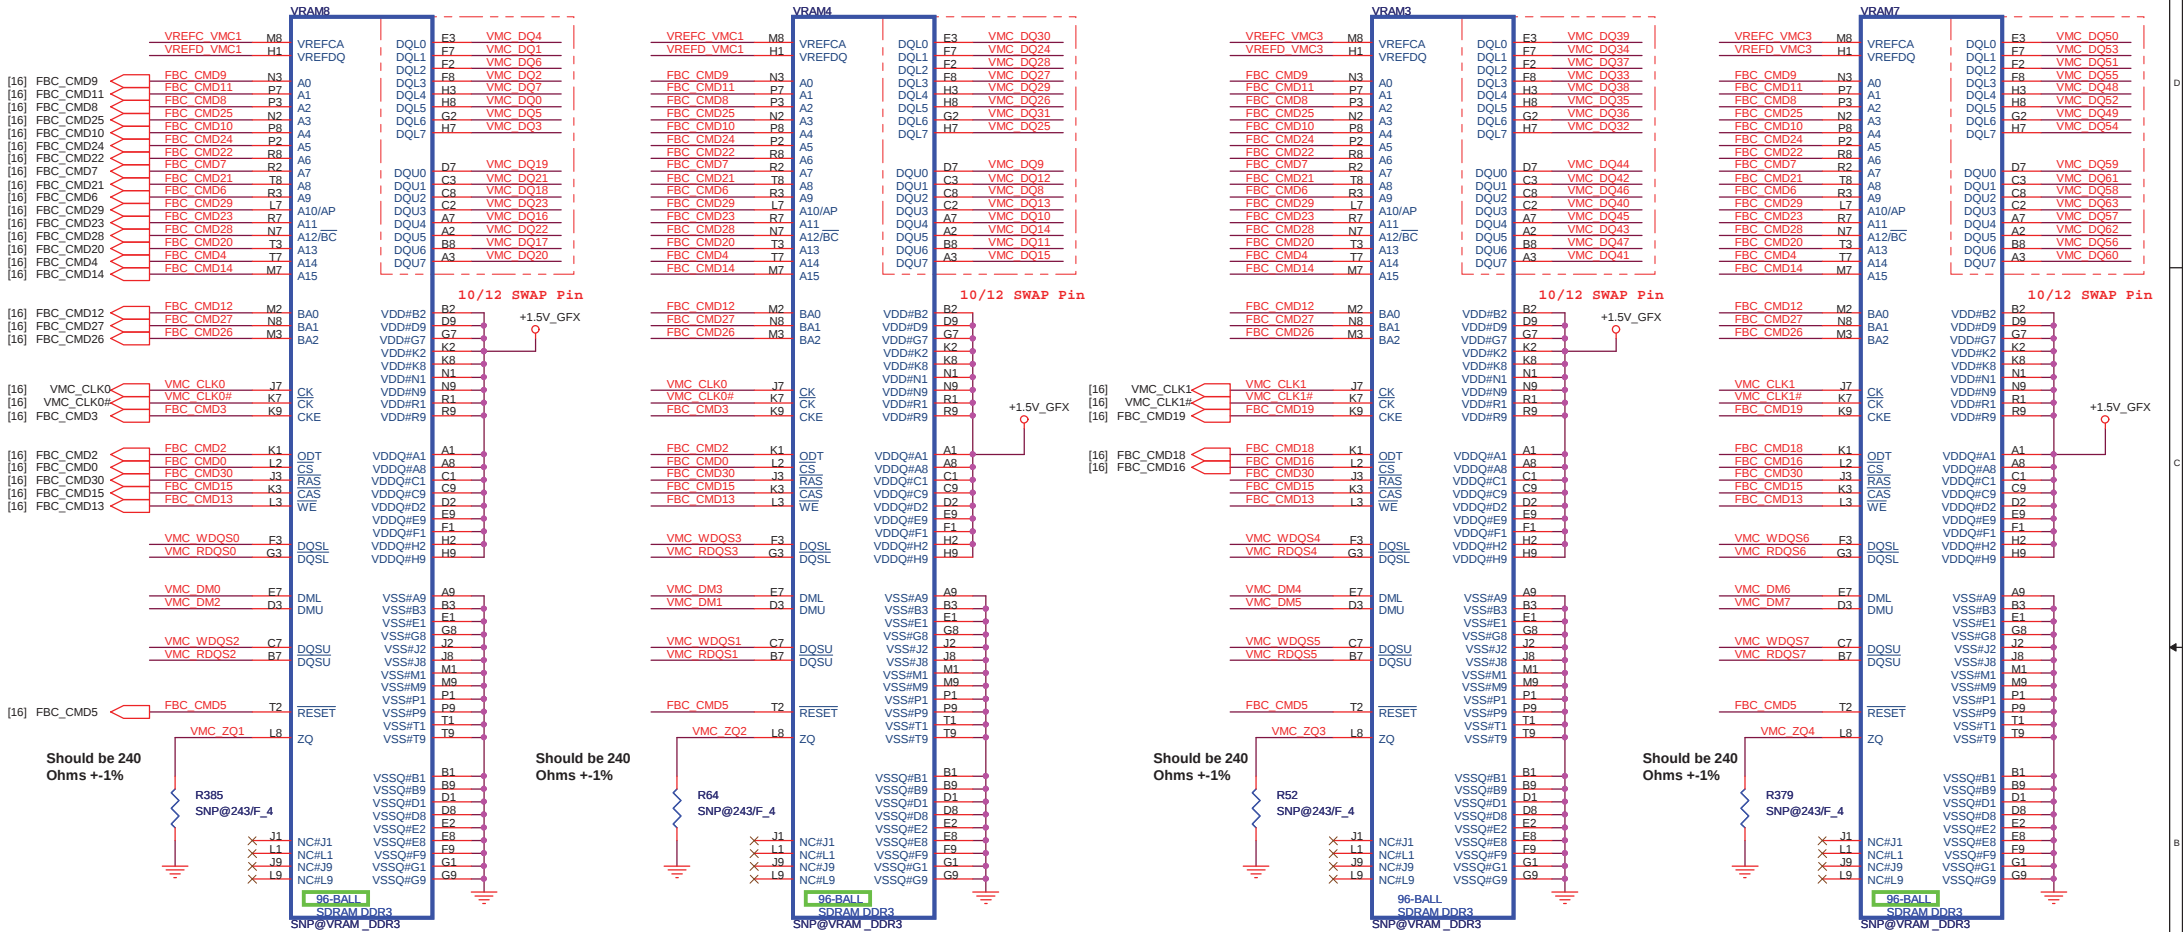


Fermi : Change to 160 ohm
1 : CS11602JB00 ,RES CHIP 160 1/16W +5%(0402)
2 : CS11622PB07 ,RES CHIP 162 1/16W +/-1%(0402)

Fermi : Change to 160 ohm
1 : CS11602JB00 ,RES CHIP 160 1/16W +5%(0402)
2 : CS11622PB07 ,RES CHIP 162 1/16W +/-1%(0402)


Quanta Computer Inc.
PROJECT : ZQTA/ZQSA

Size Document Number
DGPU Memory 2/2 (DDR3)
Date: Friday, November 11, 2011 Sheet 21 of 44 Rev 1A



CRT

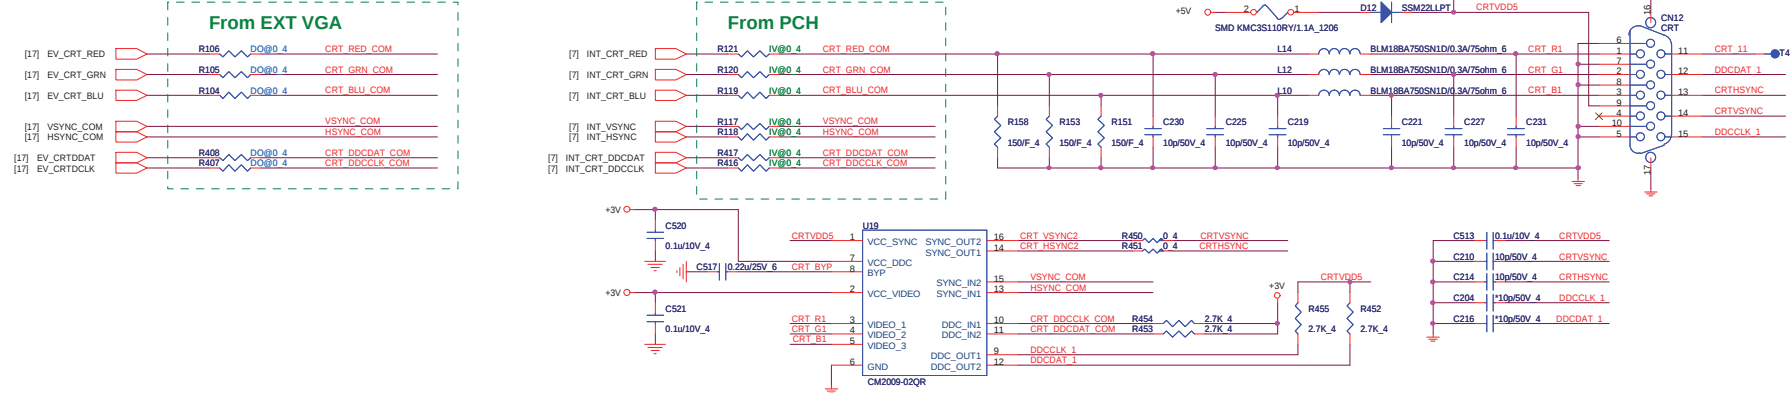


LVDS & eDP

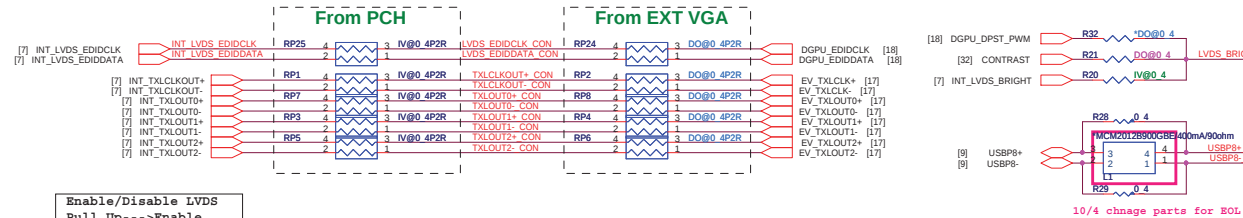


Enable/Disable LVDS Pull Up--->Enable NC--->Disable

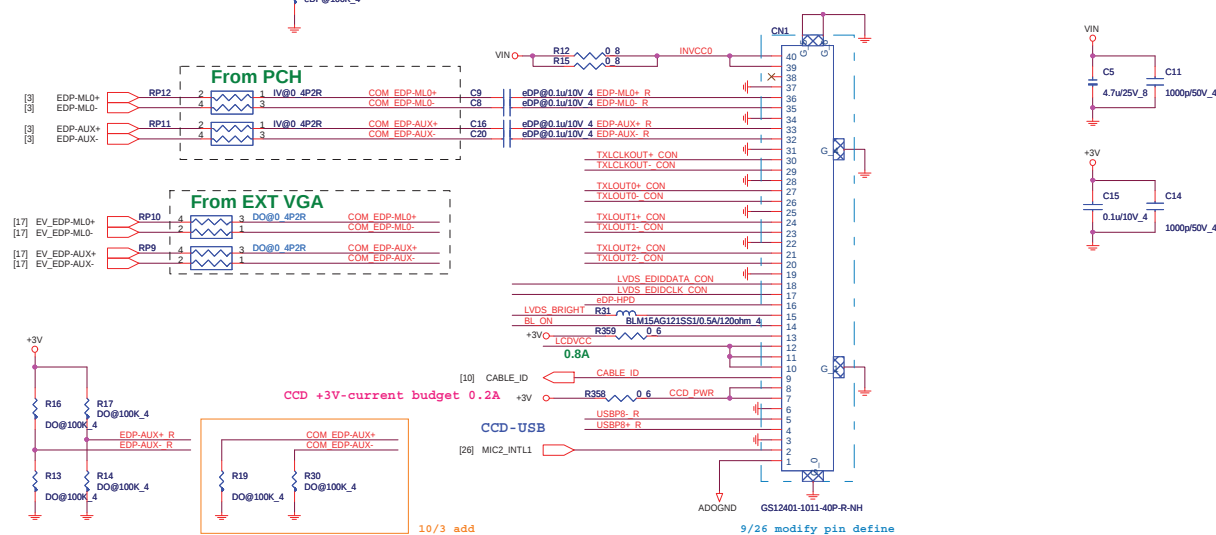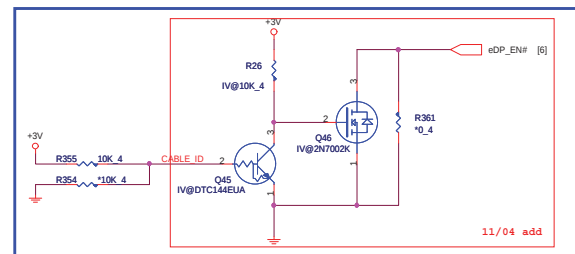


LCD Power


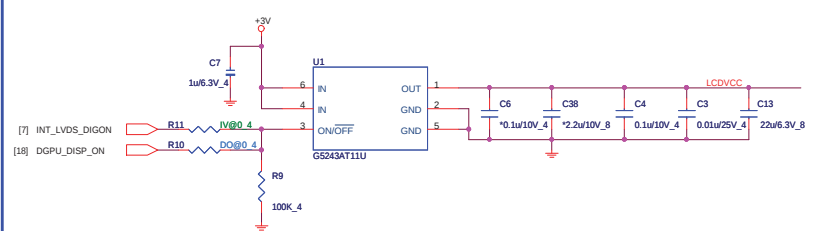


Lid Switch (Hall sensor)

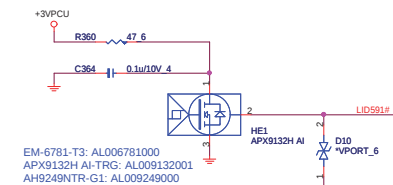

Backlight Control

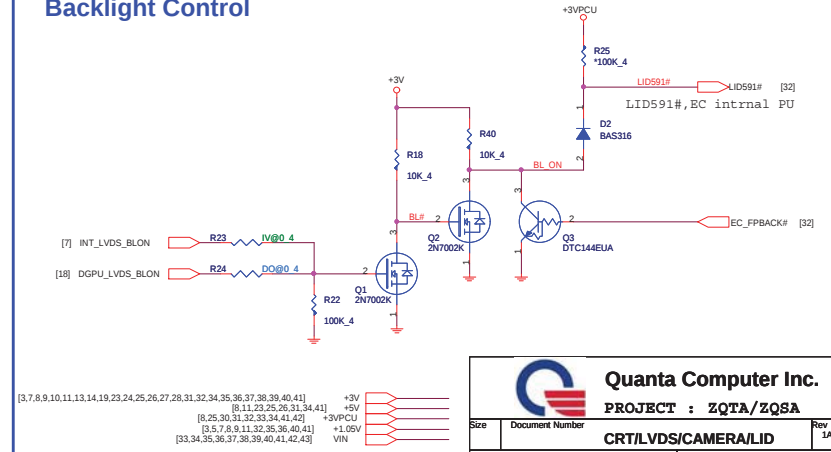


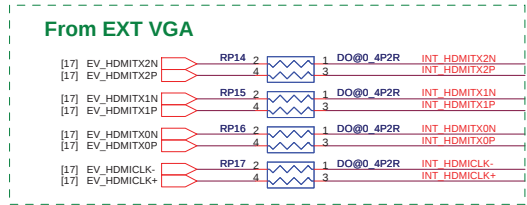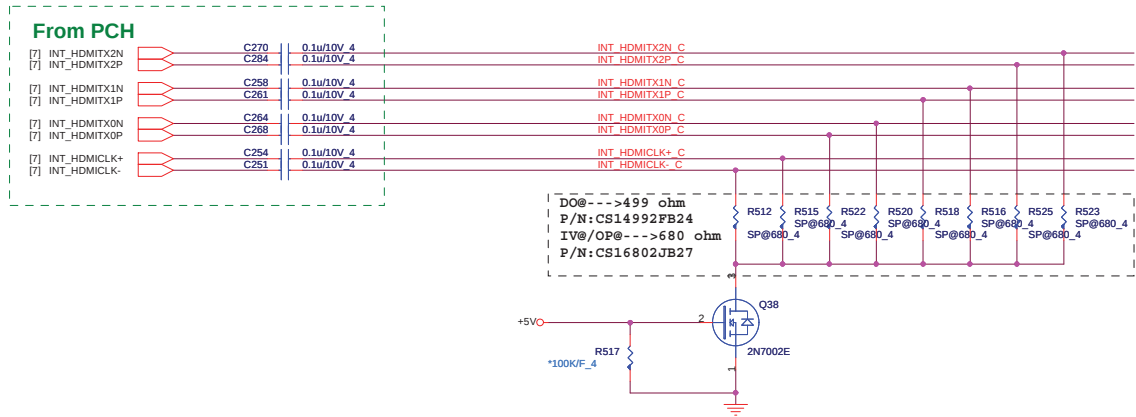


IV@:iGPU
EV@:dGPU
OP@:Optimus
DO@:Discrete only
SP@:Special

I2C


UMA	R239 R245	CS22202JB18
DIS	R239 R245	CS24702JB38

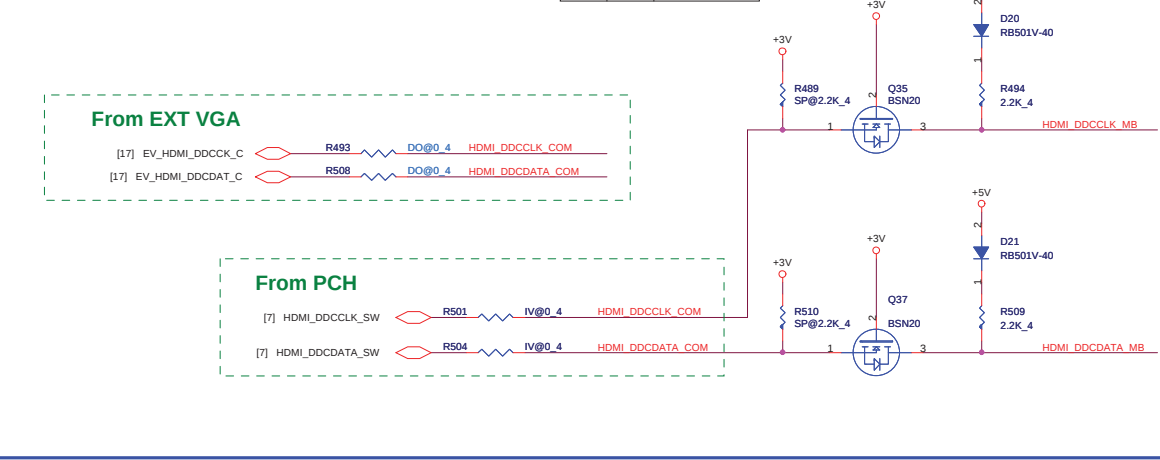


HDMI connector

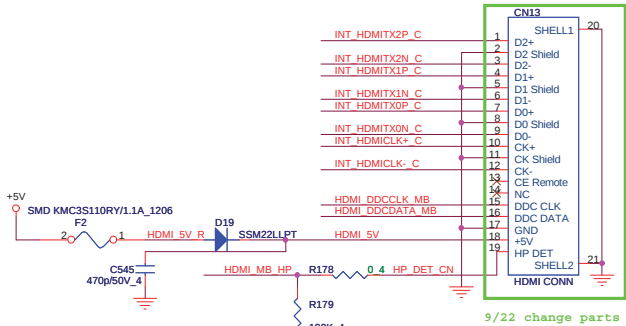


HDMI-detect

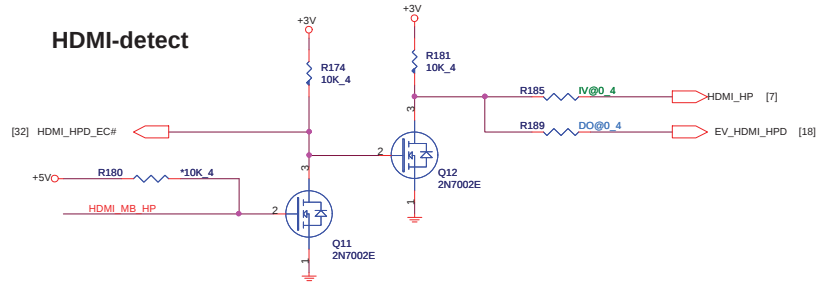

EMI

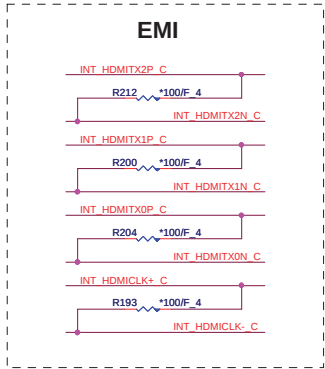


+3.3V: 1000mA
+3.3Vaux:330mA
+1.5V:500mA

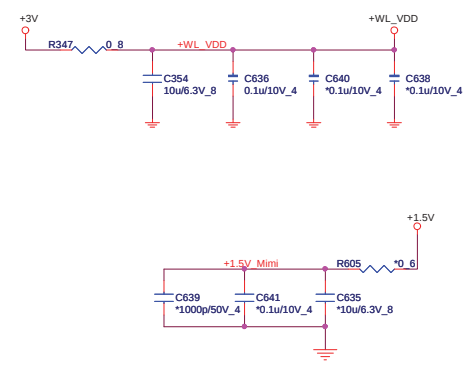


The diagram illustrates the pin configuration for the CN7 connector. The pins are numbered 1 through 40. The connections are as follows:

- Power Pins:**
 - Pins 1, 5, 9, 13, 17, 21, 25, 29, 33, 37, 40 are connected to GND.
 - Pins 2, 6, 10, 14, 18, 22, 26, 30, 34, 38 are connected to +3V.
 - Pins 3, 7, 11, 15, 19, 23, 27, 31, 35, 39 are connected to +3Vaux.
- Signal Pins:**
 - Pins 4, 8, 12, 16, 20, 24, 28, 32, 36 are connected to USBP3+ and USBP3-.
 - Pins 1, 5, 9, 13, 17, 21, 25, 29, 33, 37, 40 are connected to GND.
 - Pins 2, 6, 10, 14, 18, 22, 26, 30, 34, 38 are connected to +3V.
 - Pins 3, 7, 11, 15, 19, 23, 27, 31, 35, 39 are connected to +3Vaux.
 - Pins 4, 8, 12, 16, 20, 24, 28, 32, 36 are connected to USBP3+ and USBP3-.
 - Pins 1, 5, 9, 13, 17, 21, 25, 29, 33, 37, 40 are connected to GND.
 - Pins 2, 6, 10, 14, 18, 22, 26, 30, 34, 38 are connected to +3V.
 - Pins 3, 7, 11, 15, 19, 23, 27, 31, 35, 39 are connected to +3Vaux.
 - Pins 4, 8, 12, 16, 20, 24, 28, 32, 36 are connected to USBP3+ and USBP3-.

MAIN SATA HDD(HDD)

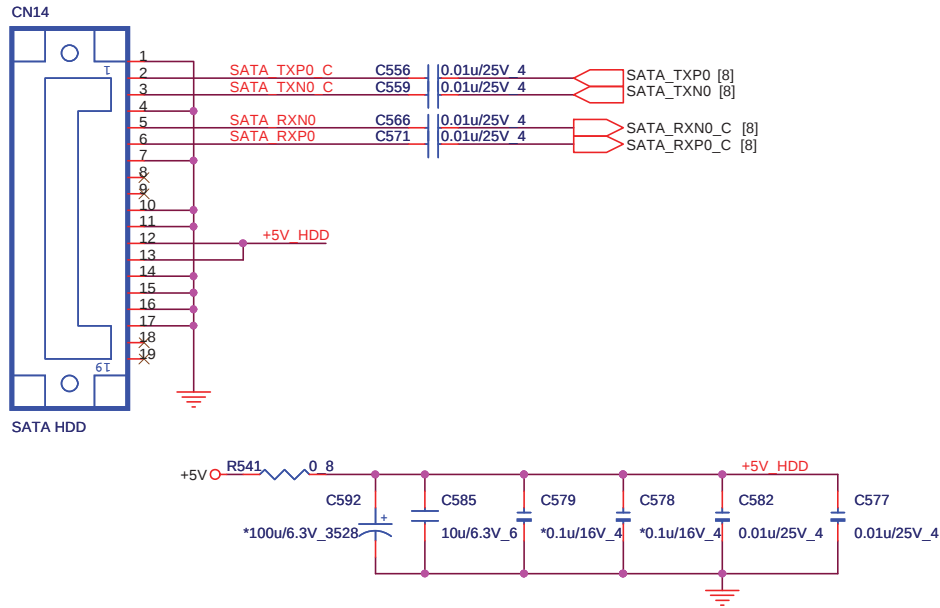


G Sensor

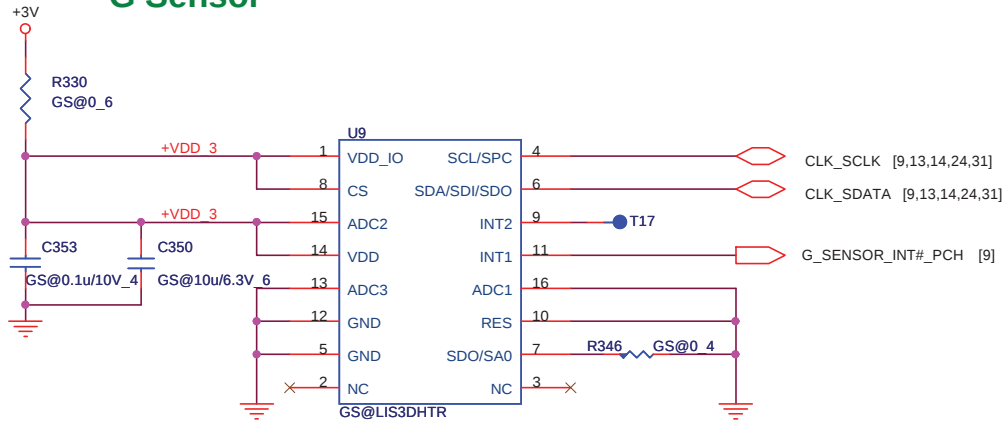


G-Sensor -->GS@

ODD (ODD)

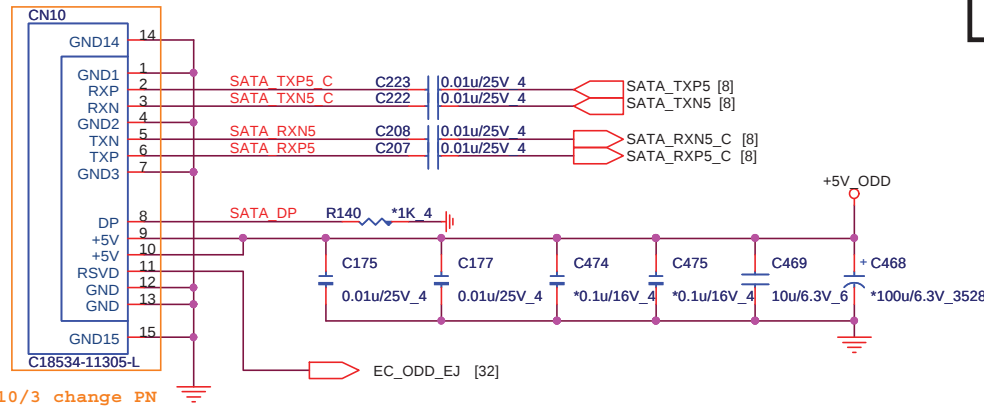

Zero Power (ODD)

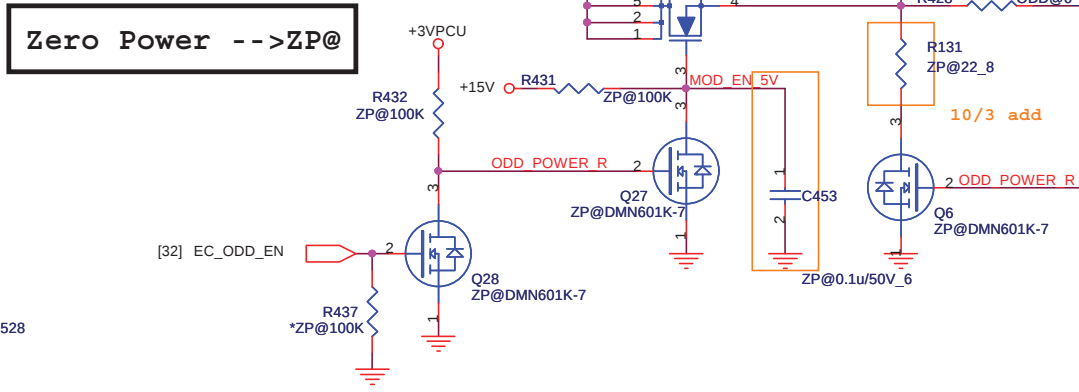


Zero Power -->ZP@



Quanta Computer Inc.
PROJECT : ZQTA/ZQSA


Size	Document Number	Rev
	SATA-HDD/ODD/G Sensor	1A
Date:	Friday, November 11, 2011	Sheet 25 of 44

Codec(ADO)

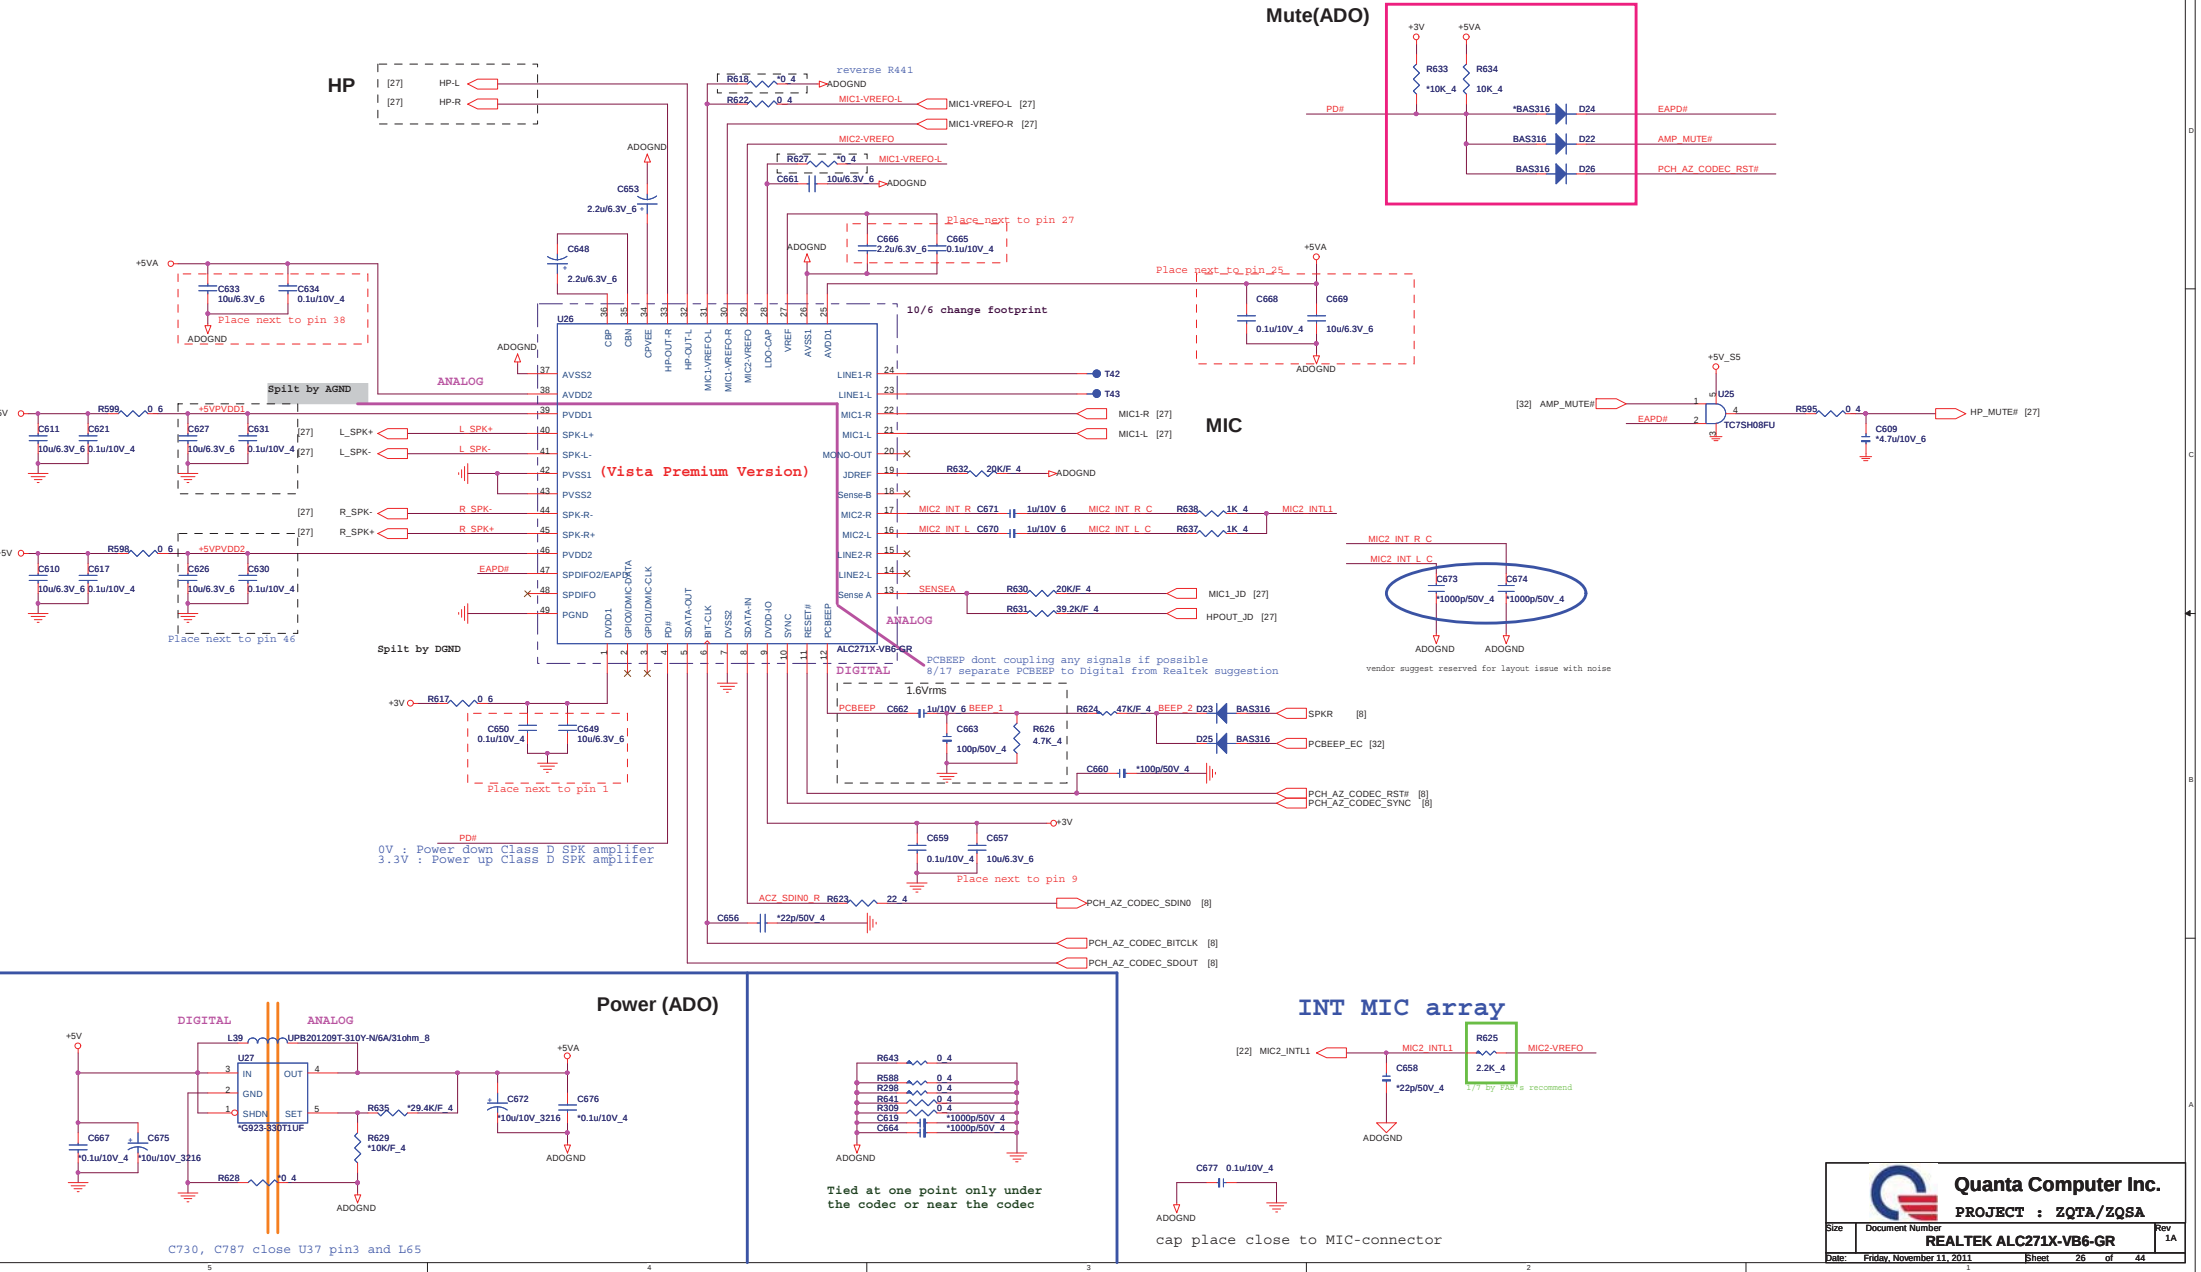


MIC


Max. 100mVrms input for Mic-IN

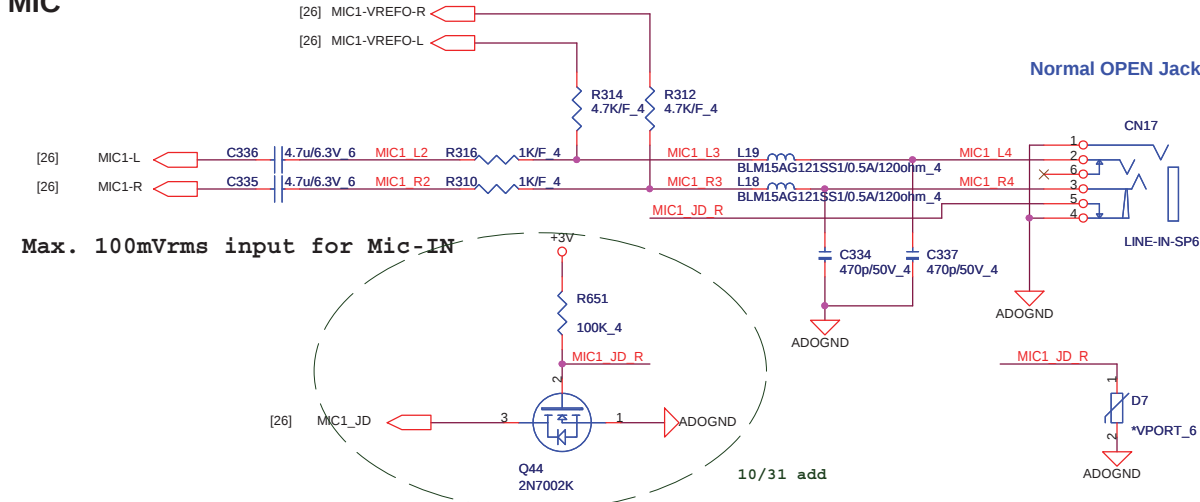


Internal Speaker

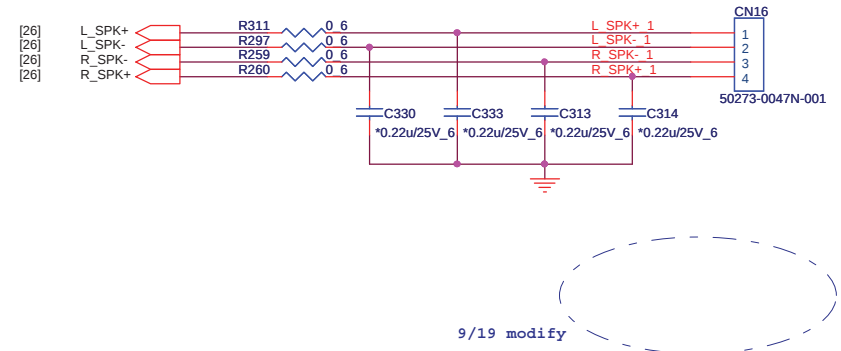


HP

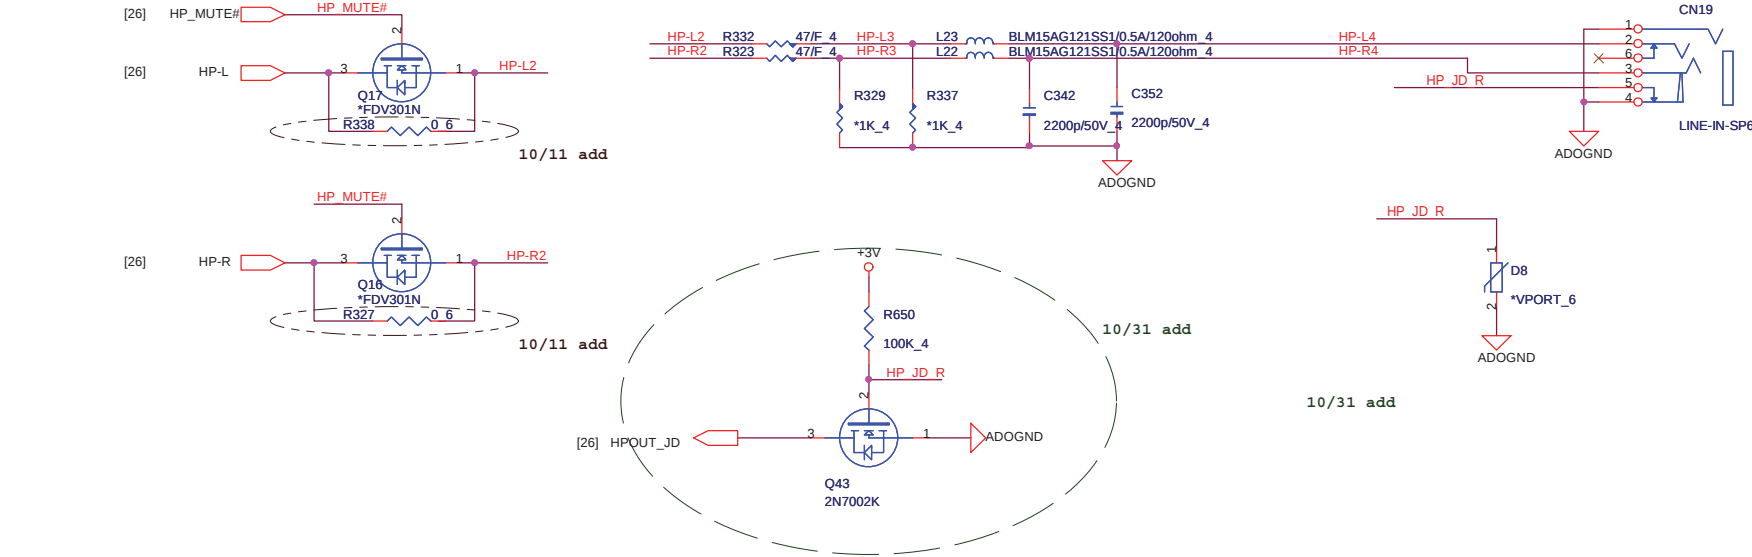


LAN/Card reader

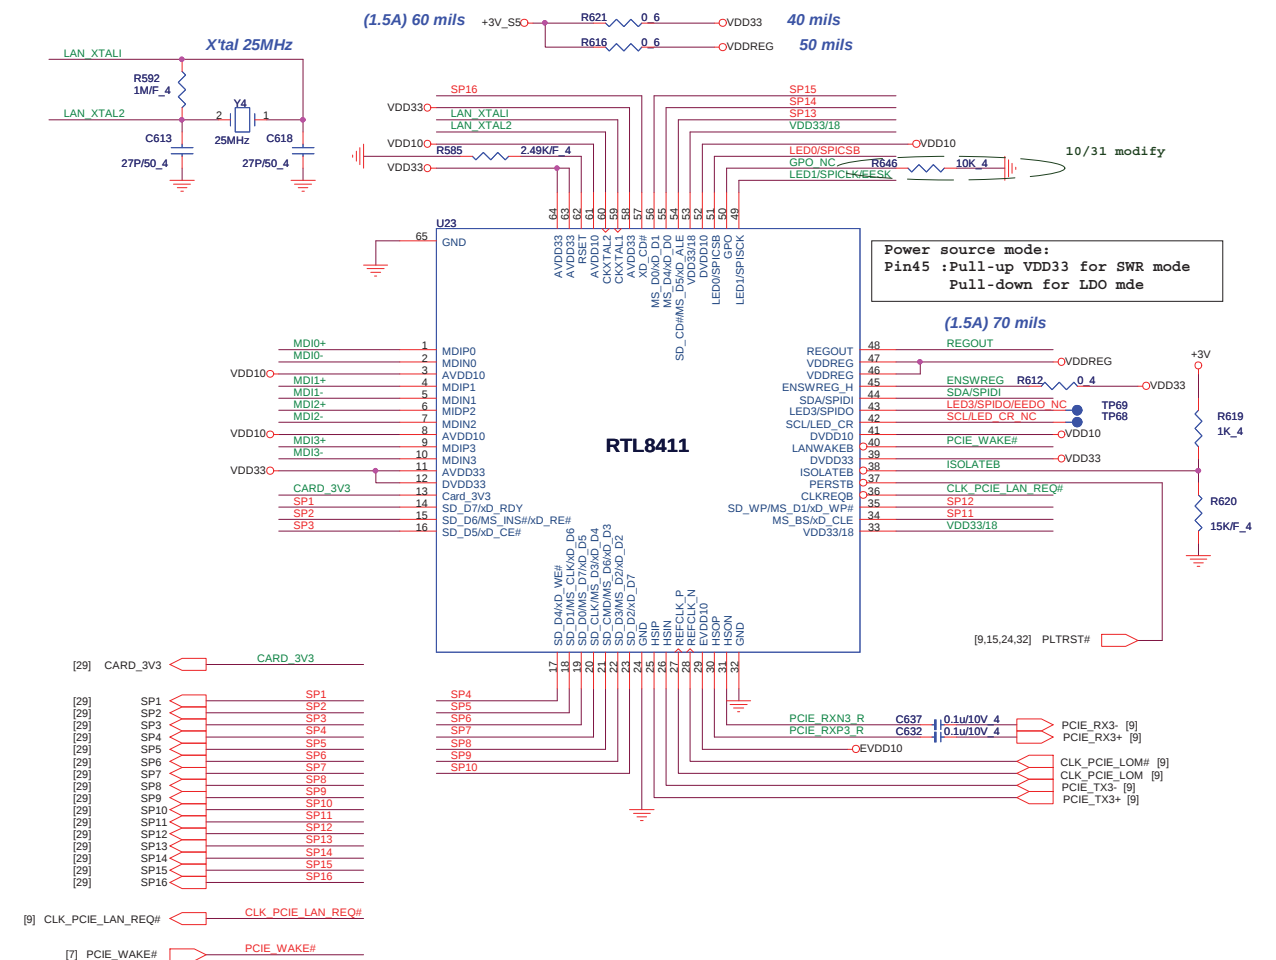



Transformer

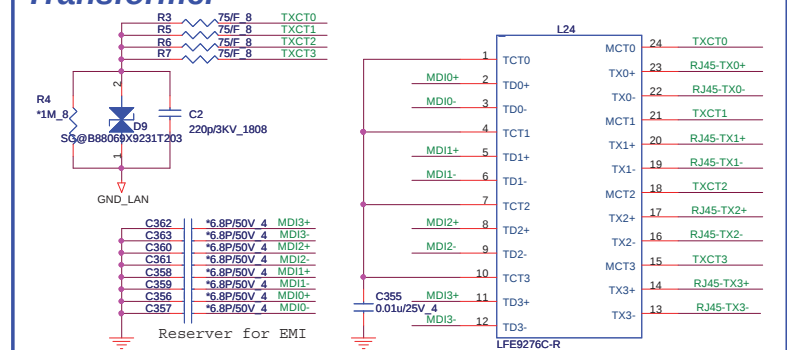

RJ45

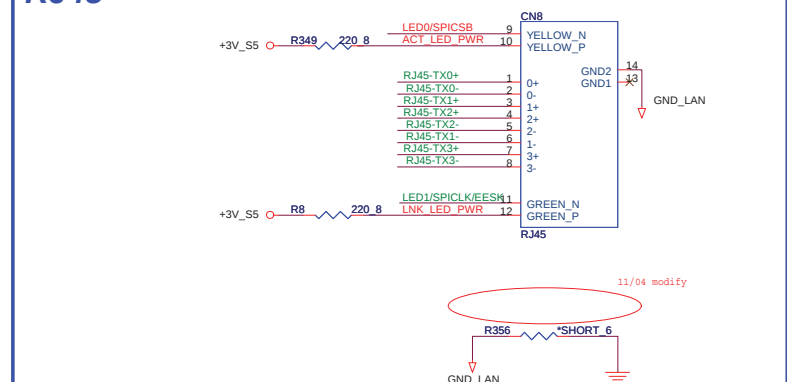


SURGE

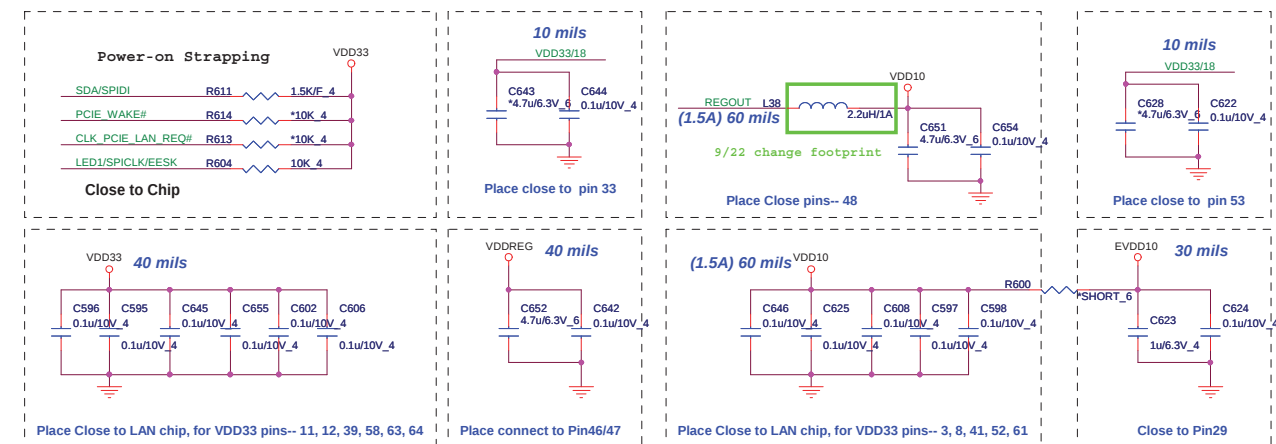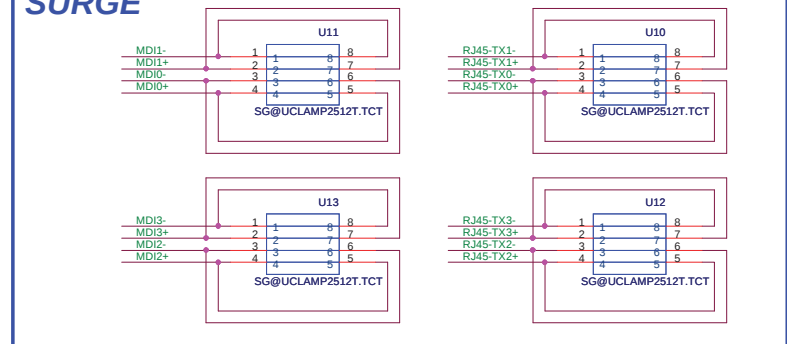


CARD READER CONNECTOR

Share Pin



SP1	SD_D7		xD_RDY
SP2	SD_D6	MS_INS#	xD_RE#
SP3	SD_D5		xD_CE#
SP4	SD_D4		xD_WE#
SP5	SD_D1	MS_CLK	xD_D6
SP6	SD_D0	MS_D7	xD_D5
SP7	SD_CLK	MS_D3	xD_D4
SP8	SD_CMD	MS_D6	xD_D3
SP9	SD_D3	MS_D2	xD_D2
SP10	SD_D2		xD_D7
SP11		MS_BS	xD_CLE
SP12	SD_WP	MS_D1	xD_WP#
SP13	SD_CD#	MS_D5	xD_ALE
SP14		MS_D4	xD_D0
SP15		MS_D0	xD_D1
SP16			xD_CD#

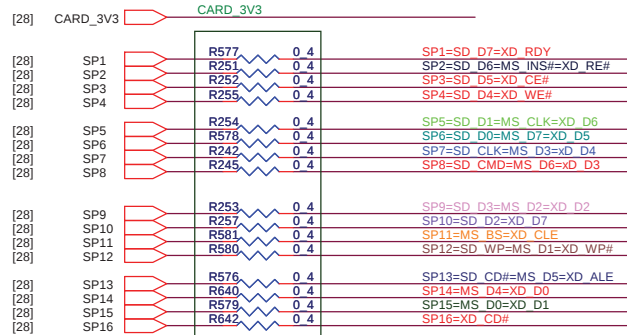

10/7 change 0 ohm

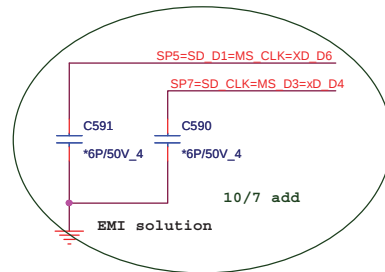

XD,MMC 4.2/SD,MS/MSP 7 IN1 CARD READER

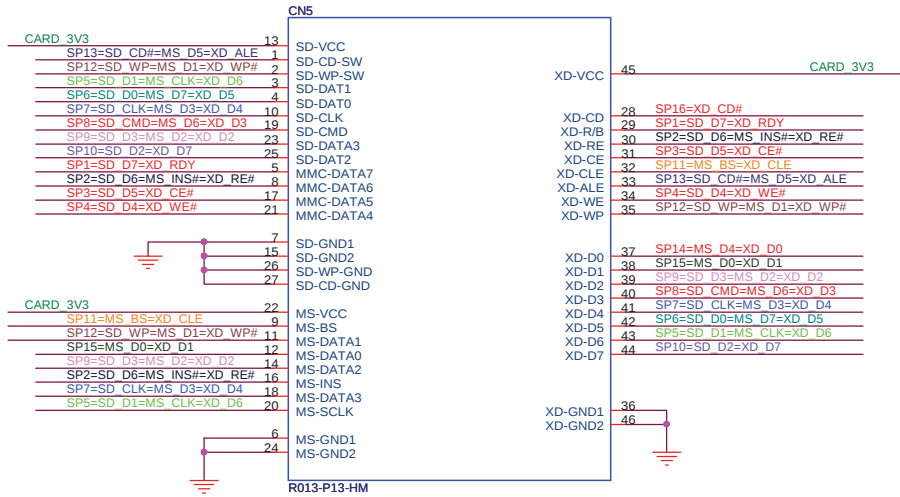


Quanta Computer Inc.

PROJECT : ZQTA/ZQSA


Size Document Number CARD READER CONNECTOR Rev 1A

Date: Friday, November 11, 2011 Sheet 29 of 44


USB3.0/2.0

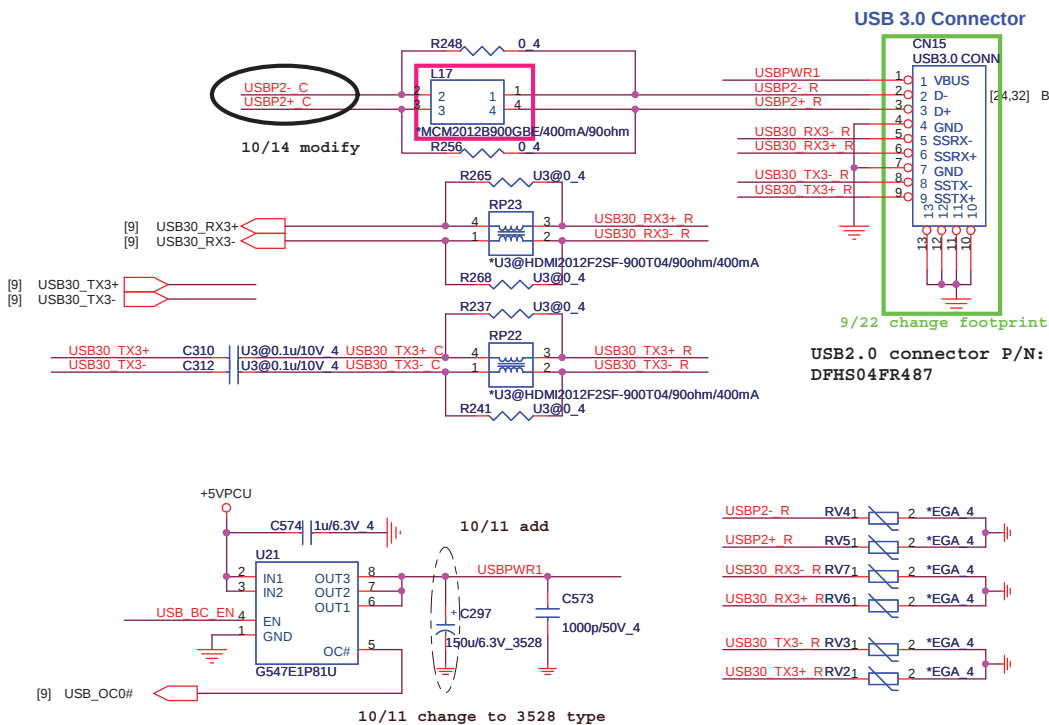

Bluetooth

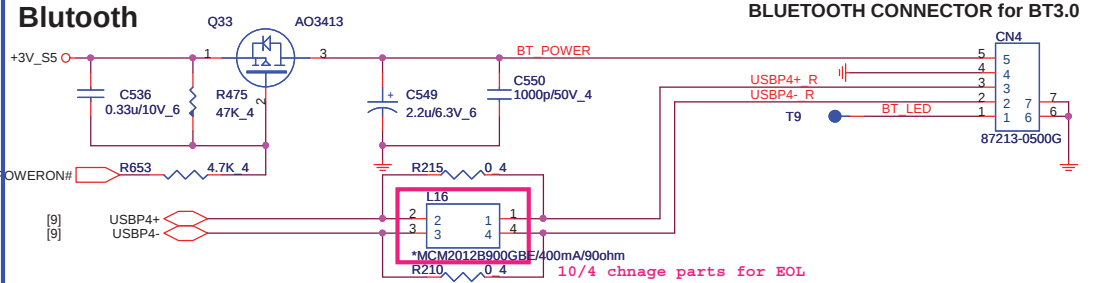


USB/B

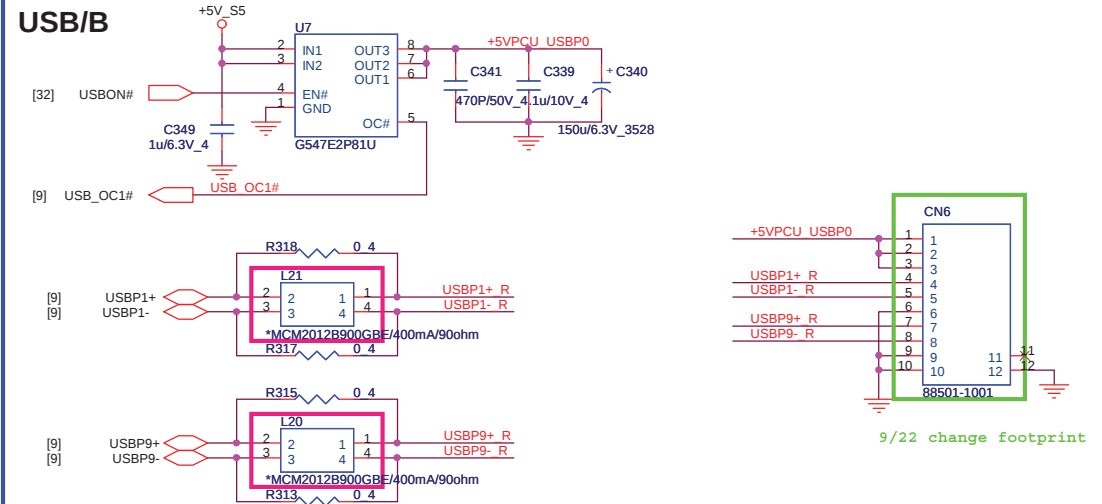


USB Charger to 3.0

CB	SELCDP	Function
0	X	DCP autodetect with mouse/keyboard wakeup
1	0	S0 charging with SDP only
1	1	S0 charging with CDP or SDP only (depending on external device)

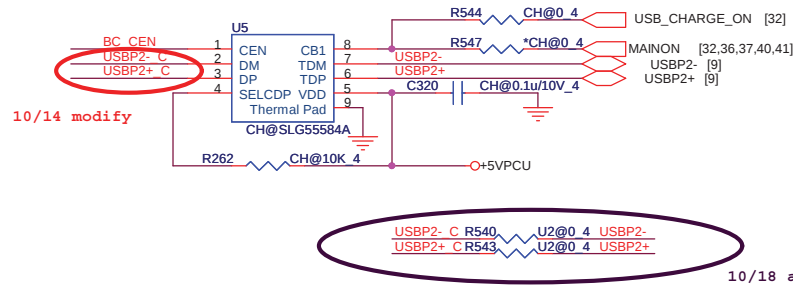

USB Charger -->CH@
None Charger--> NCH@

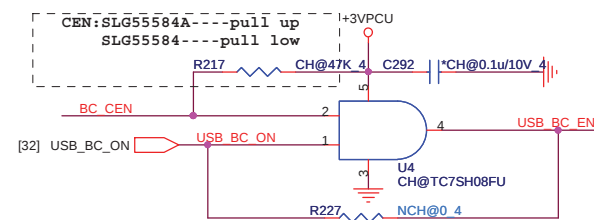



Quanta Computer Inc.
PROJECT : ZQTA/ZQSA

Size Document Number
USB/ BT/CHARGER
Date: Friday, November 11, 2011 Sheet 30 of 44


K/B

9/14 modify

+3VPCU

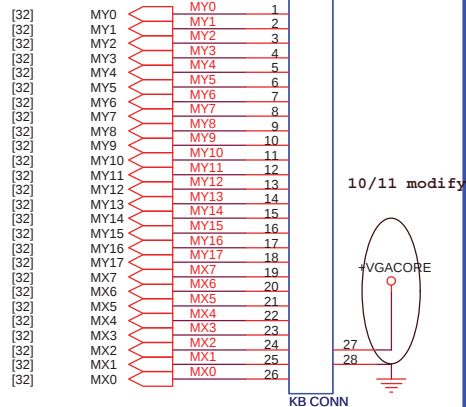


CPU FAN

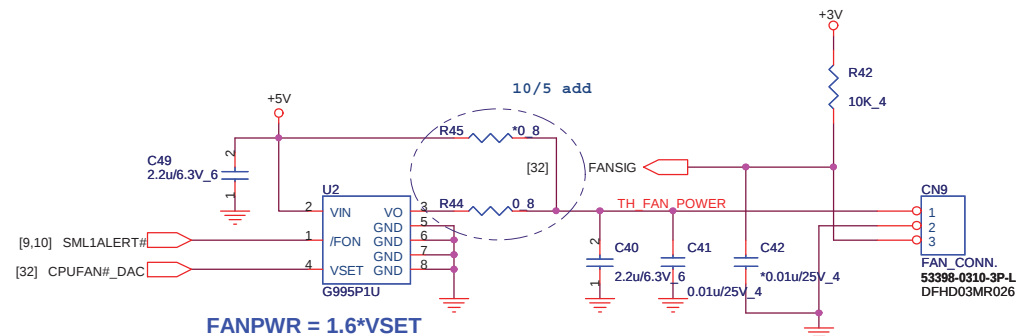


TOUCHPAD & Switch CONN.

Model EA/EG/BA---->SW3, SW4
VA/VG----->SW5, SW6

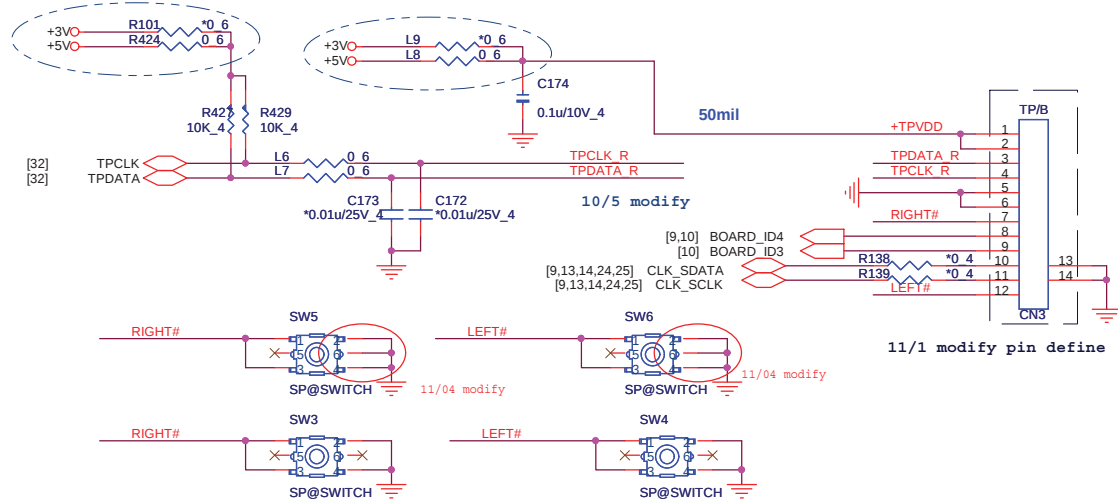


For BA WLAN function

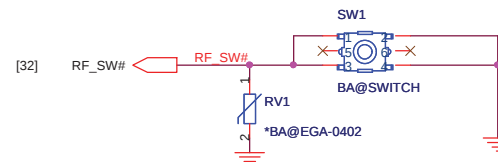


		Quanta Computer Inc. PROJECT : ZQTA/ZQSA	
		KB/FAN/TP+FP/LED	Rev 1A
Size	Document Number	Date: Friday, November 11, 2011	Sheet 31 of 44



EC(KBC)

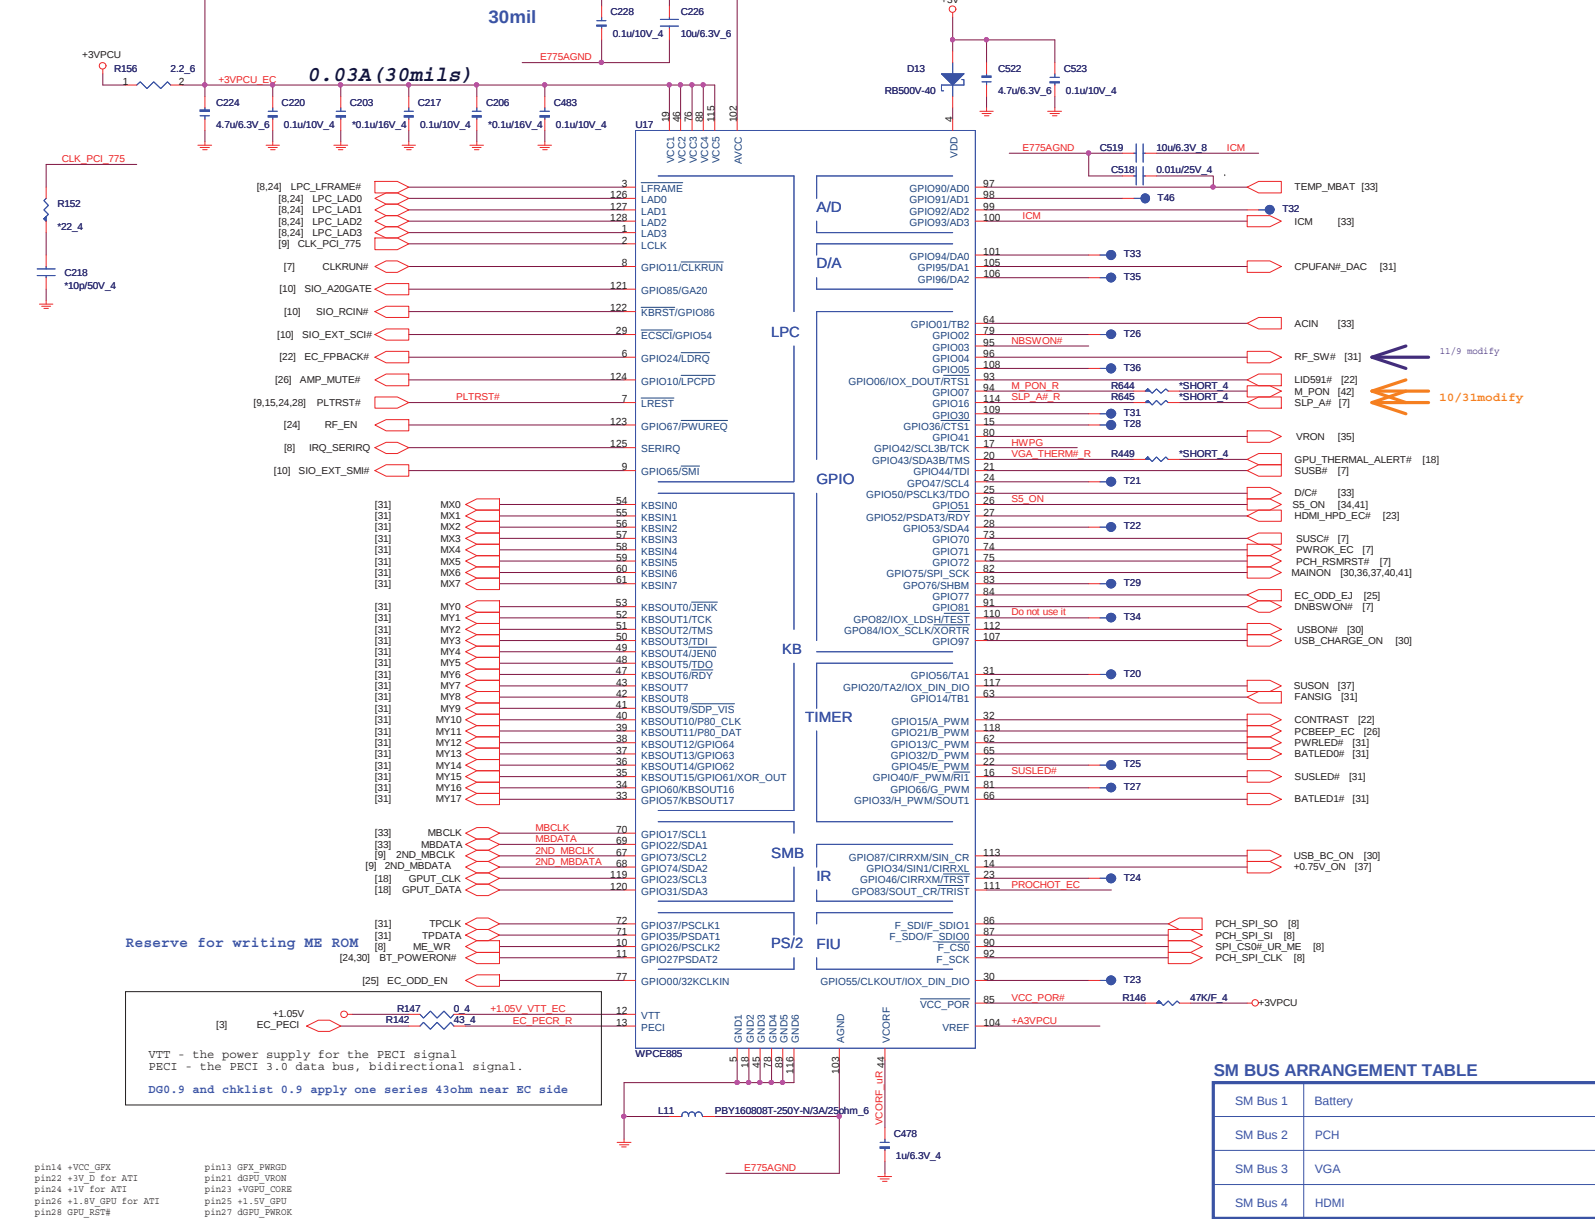


Power on bottom

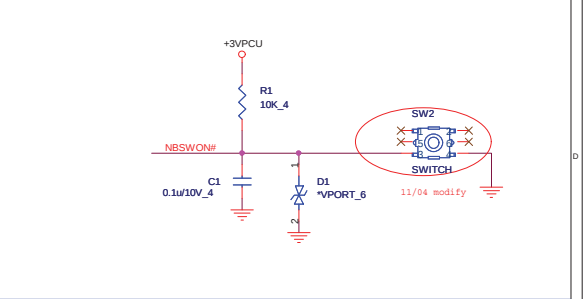

SM BUS PU(KBC)

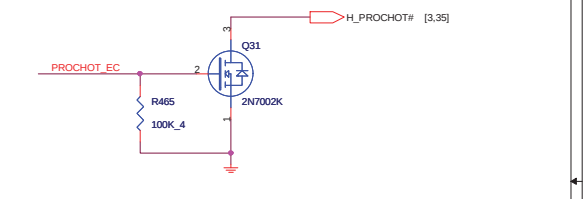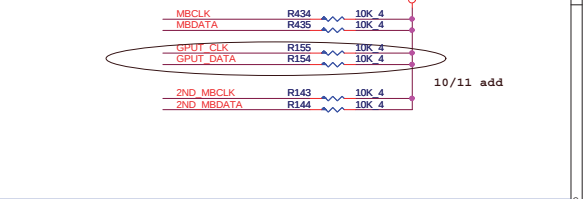


HWPG(KBC)

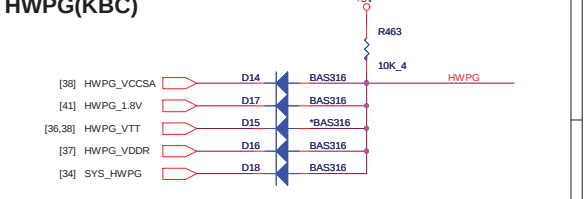


Quanta Computer Inc.
PROJECT : ZQTA/ZQSA

Size Document Number
WPCE885 & FLASH

Date: Friday, November 11, 2011 Sheet 32 of 44

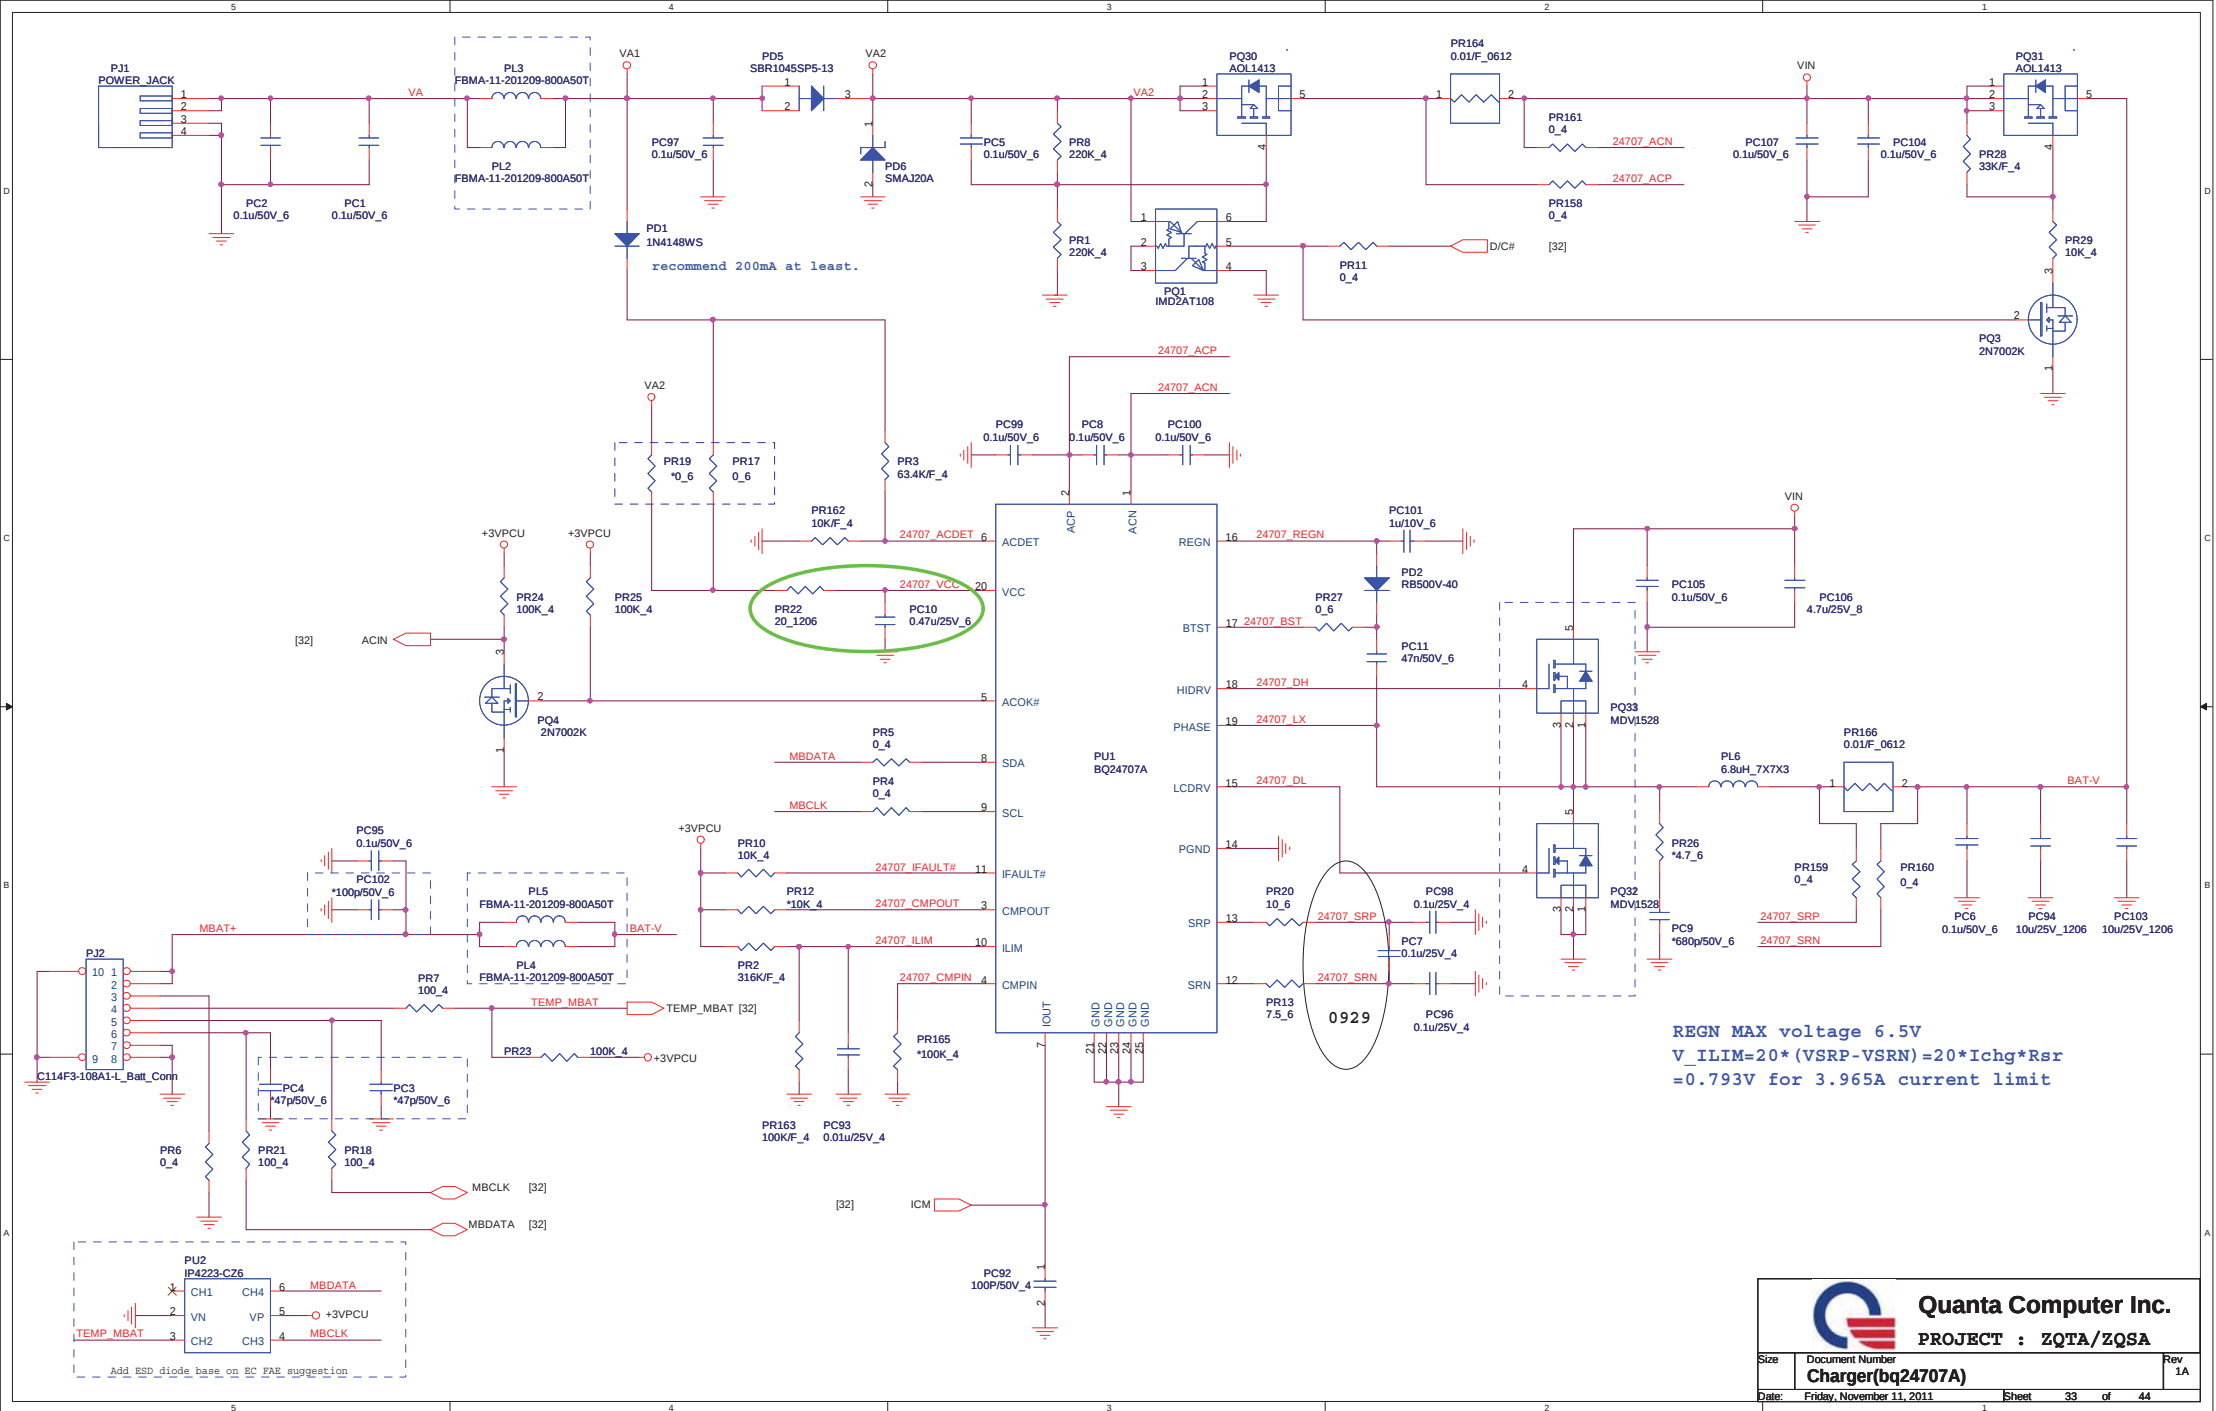

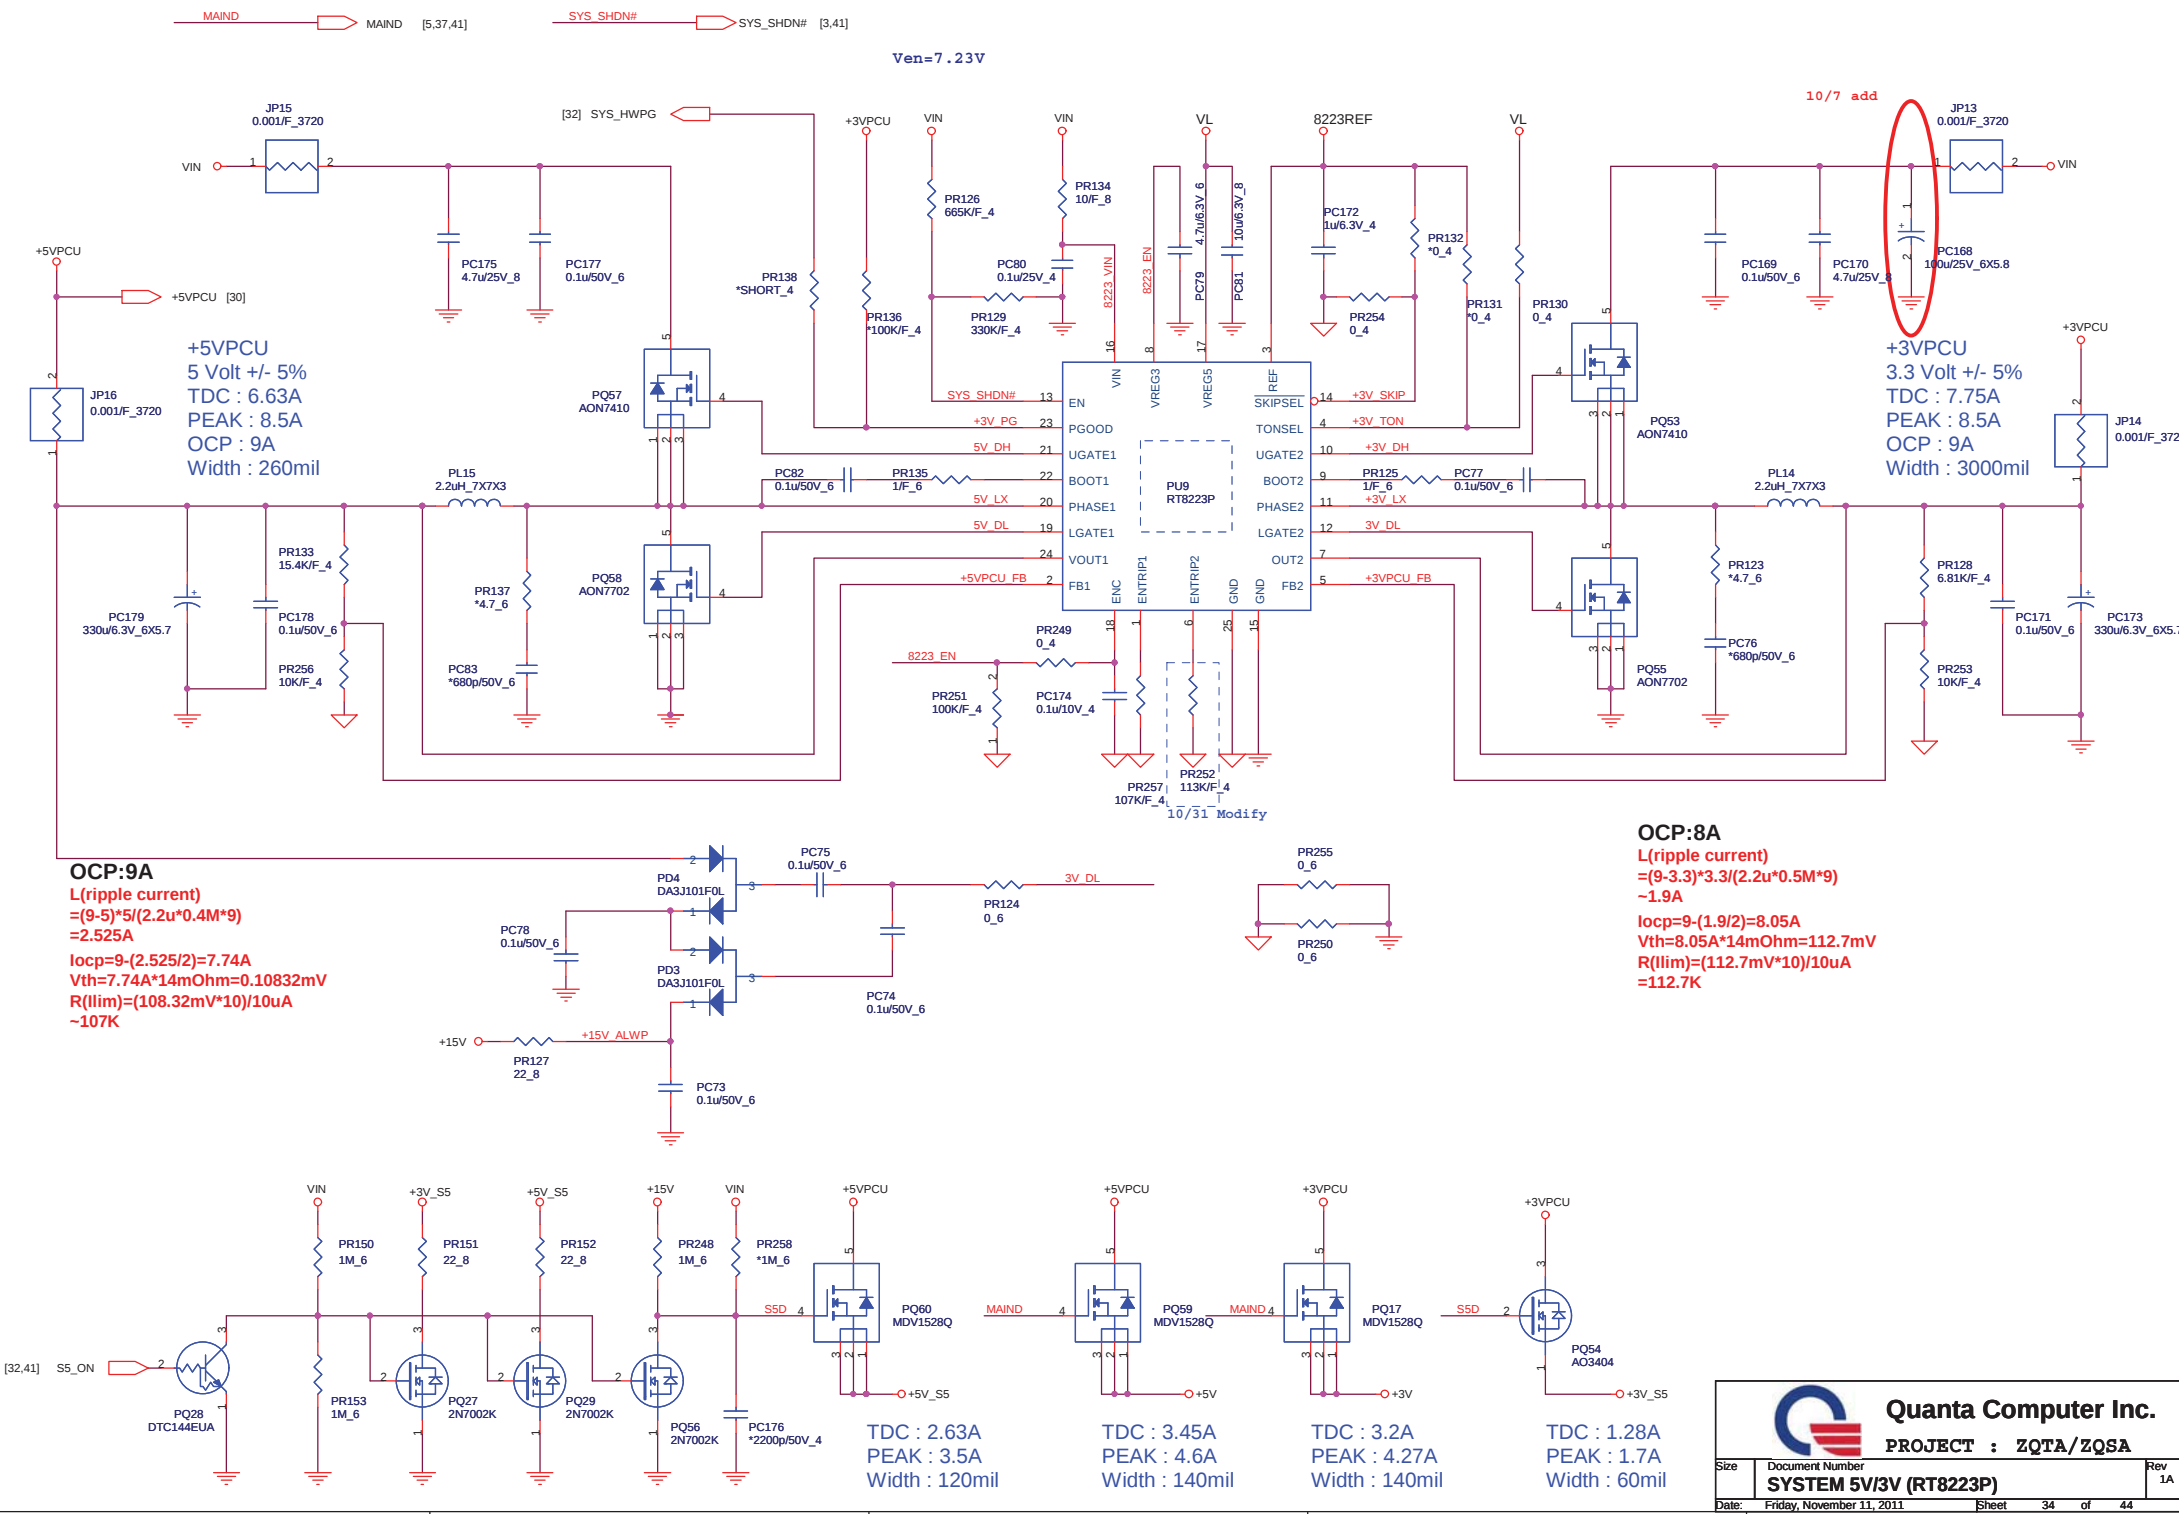

OCP:9A
L(ripple current)
=(9-5)*5/(2.2u*0.4M*9)
=2.525A
Iocp=9-(2.525/2)=7.74A
Vth=7.74A*14mOhm=0.10832mV
R(Ilim)=(108.32mV*10)/10uA
~107K


OCP:8A
L(ripple current)
=(9-3.3)*3.3/(2.2u*0.5M*9)
~1.9A
Iocp=9-(1.9/2)=8.05A
Vth=8.05A*14mOhm=112.7mV
R(Ilim)=(112.7mV*10)/10uA
=112.7K


TDC : 2.63A
PEAK : 3.5A
Width : 120mil

TDC : 3.45A
PEAK : 4.6A
Width : 140mil

TDC : 3.2A
PEAK : 4.27A
Width : 140mil

TDC : 1.28A
PEAK : 1.7A
Width : 60mil



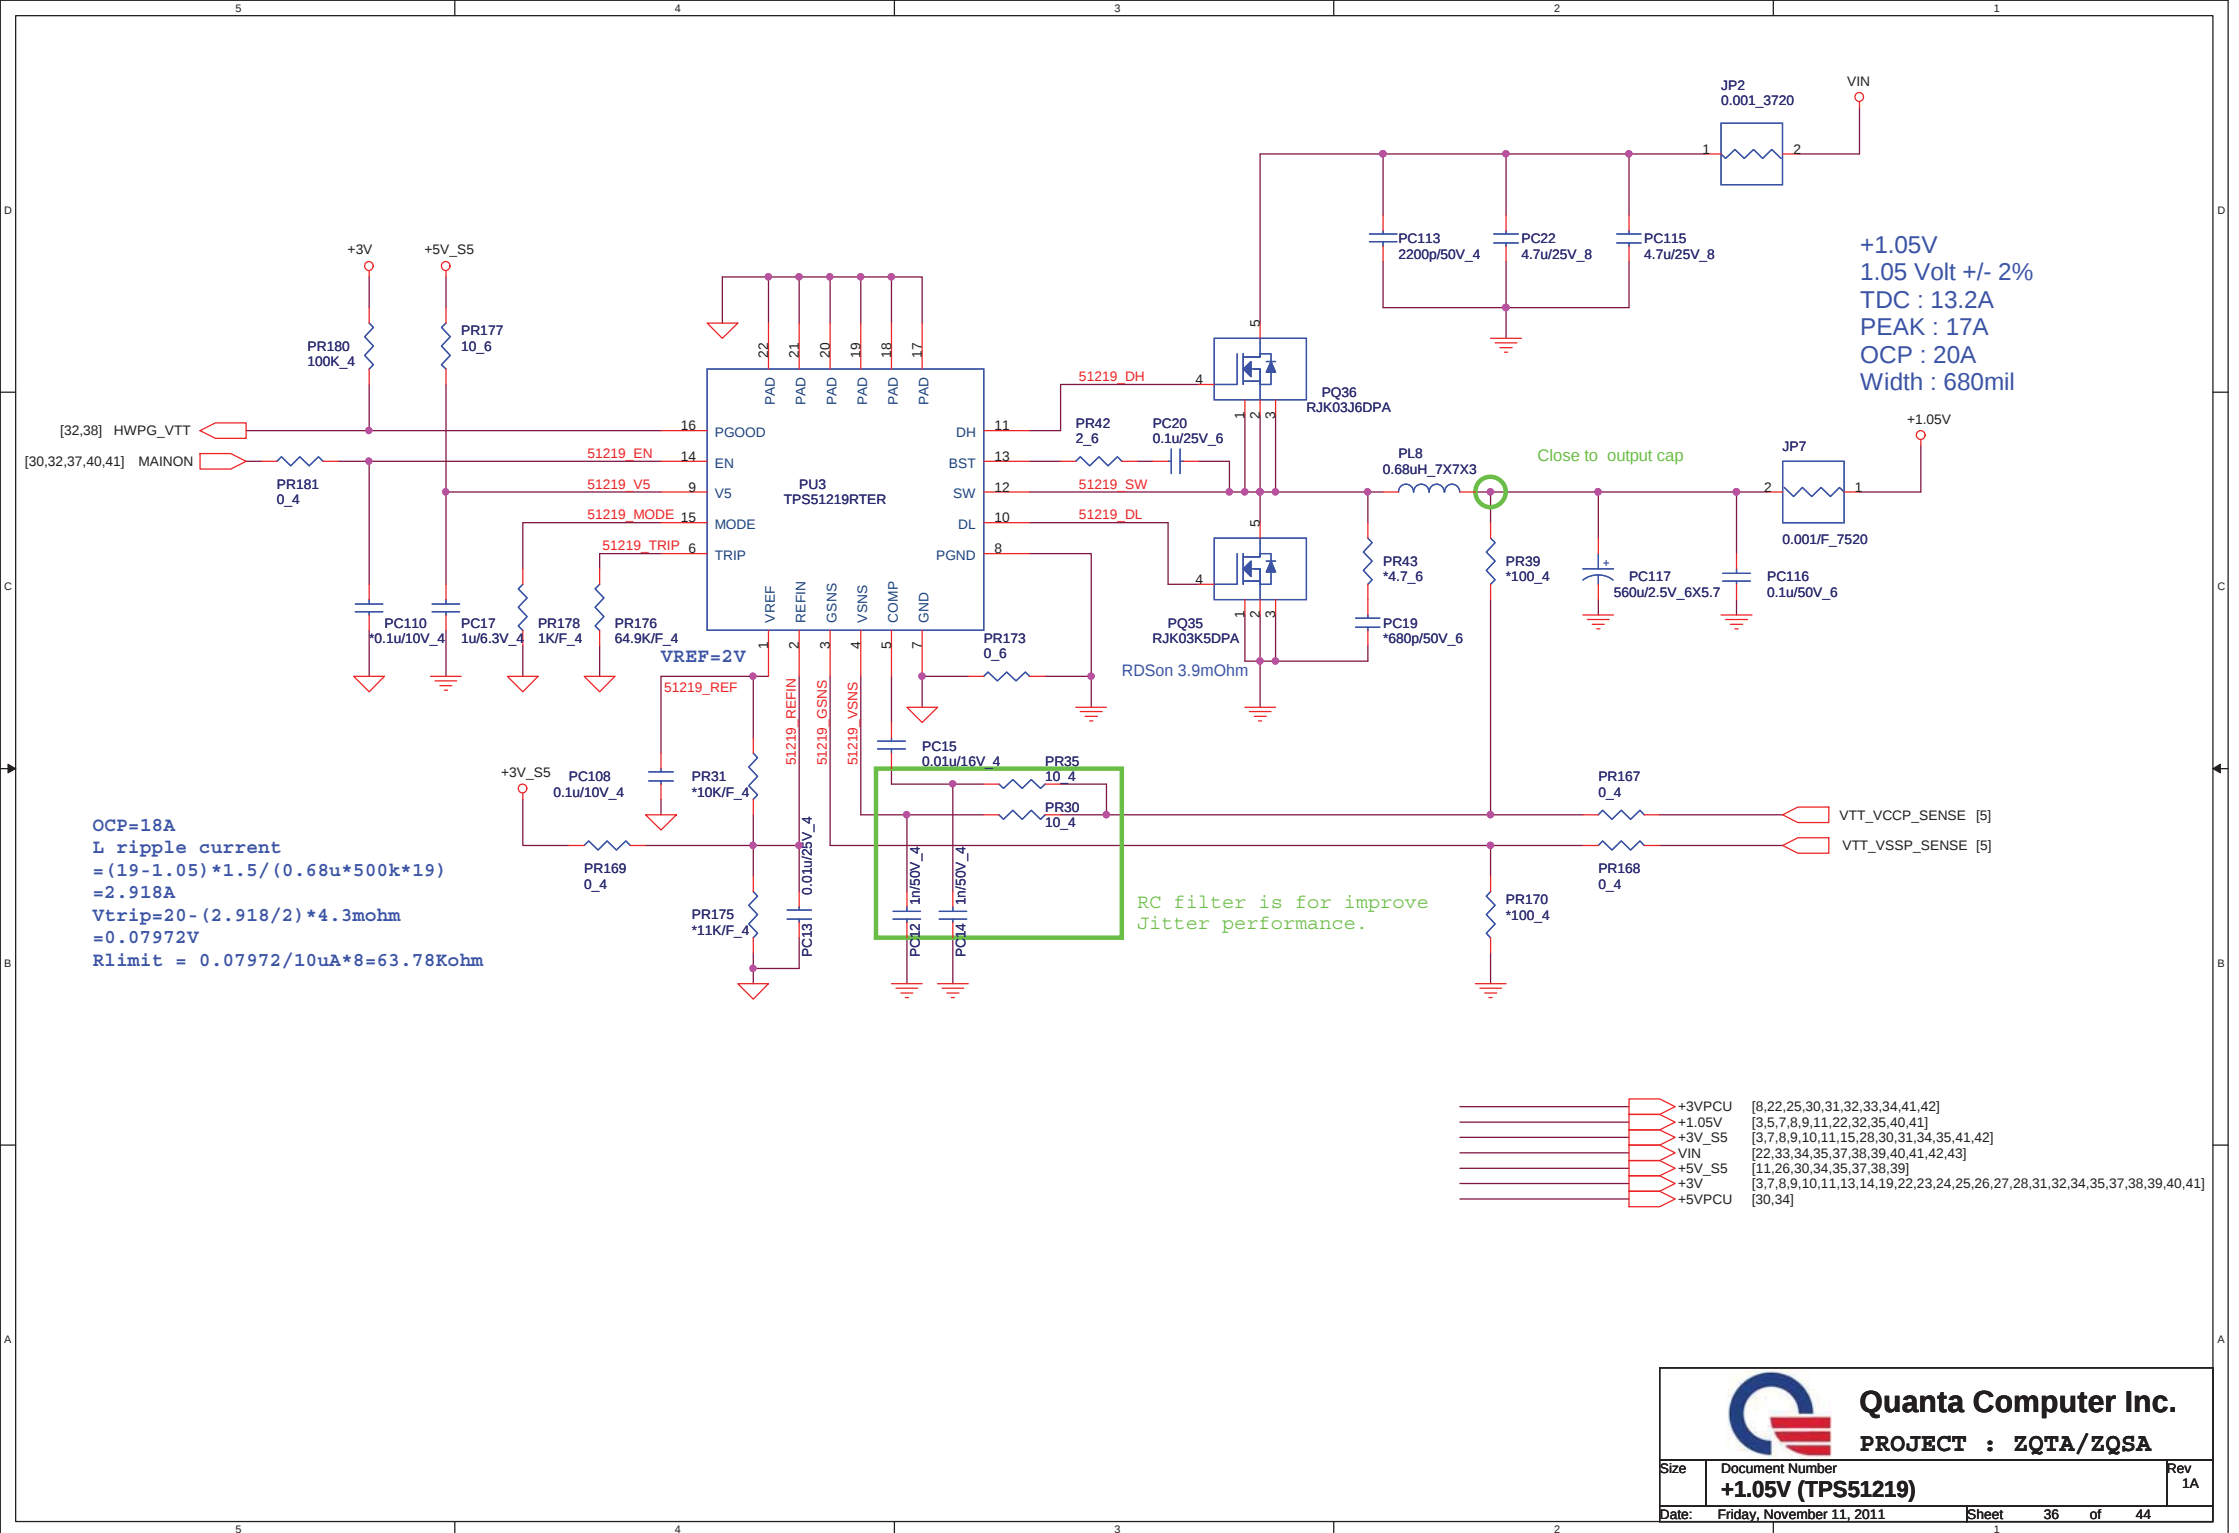

TDC : 0.38A
PEAK : 0.5A
Width : 20mil

TDC : 0.75A
PEAK : 1A
Width : 40mil

+SMDDR_VREF

PC182
0.22u/10V_4

PR265
100K/F_4

[32] HWPG_VDDR

[30,32,36,40,41] MAINON
[32] +0.75V_ON
[32] SUSON

PR267
*0.4
PR286
0.4
PR268
0.4

PR261
200K/F_4
PR262
60.4K/F_4

VREF=1.8V

51216 S3
PR264
*0.4
51216 S5

PC183
0.1u/10V_4

PR140
10K/F_4

PR260
51K/F_4

+0.75V_DDR_VTT
PC85
10u/6.3V_8
PC86
10u/6.3V_8

Close to IC

Greater than or equal 40mil

+5V_S5

PC184
10u/6.3V_8
PC87
1u/10V_4

JP18
0.001_3720

PC194
4.7u/25V_8

JP17
0.001/F_7520

+1.5V_SUS
1.5 Volt +/- 5%
TDC : 14.67A
PEAK : 18A
OCP : 20A
Width : 600mil

Close to output cap

+1.5VSUS

TDC : 0.38A
PEAK : 0.5A
Width : 20mil

PQ18
AO3404

OCP=20A
I ripple current
= (19-1.5)*1.5/(0.68u*400k*19)
=5.079A
Vtrip=20-(5.079/2)*4.3mohm
=0.07508V
Rlimit=0.07508/10uA*8=60.063Kohm

	S3	S5	+1.5VSUS	REF	VTT
S0	1	1	ON	ON	ON
S3 (mainon off)	0	1	ON	ON	OFF
S4/S5	0	0	OFF	OFF	OFF




Quanta Computer Inc.
PROJECT : ZQTA/ZQSA

Size	Document Number	Rev
	DDR 1.5V(TPS51216)	1A
Date	Friday, November 11, 2011	Sheet 37 of 44

G0	G1	+VCCSA
0	0	0.9V
0	1	0.8V
1	0	0.725V
1	1	0.675V

default 0.9V

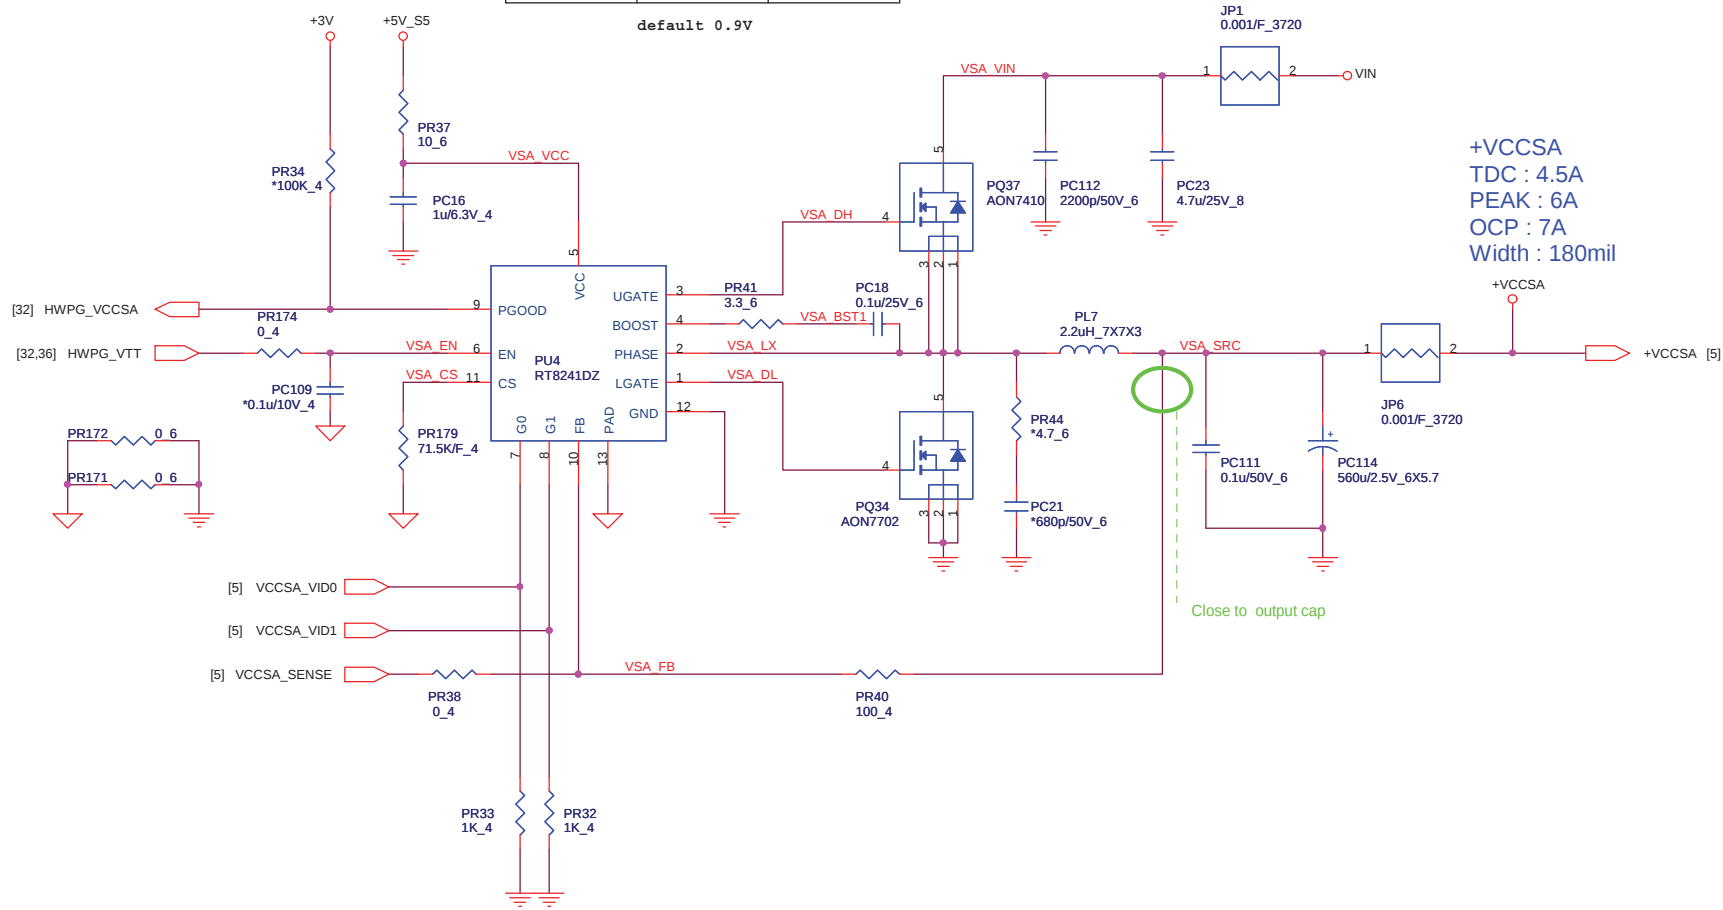

+VCCSA
TDC : 4.5A
PEAK : 6A
OCP : 7A
Width : 180mil


Close to output cap

OCP=7A
Iripple=(19-0.9)*0.9/(2.2u*300K*19)
=1.299A
Rth=14mohm*8*(7-0.65)/10uA
=71.125K
Ipeak=8.299A





Quanta Computer Inc.
PROJECT : ZQTA/ZQSA

Size	Document Number	Rev
	VCCSA(RT8241DZ)	1A
Date:	Friday, November 11, 2011	Sheet 38 of 44

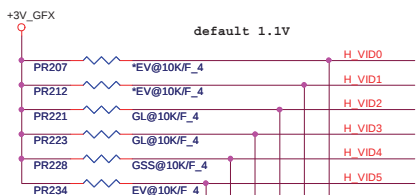


1013

	VID5	VID4	VID3	VID2	VID1	VID0
N13P-GL QS	1	0	1	1	0	0
N13P-GS QS	1	1	0	0	0	0
N13M-GS ES						


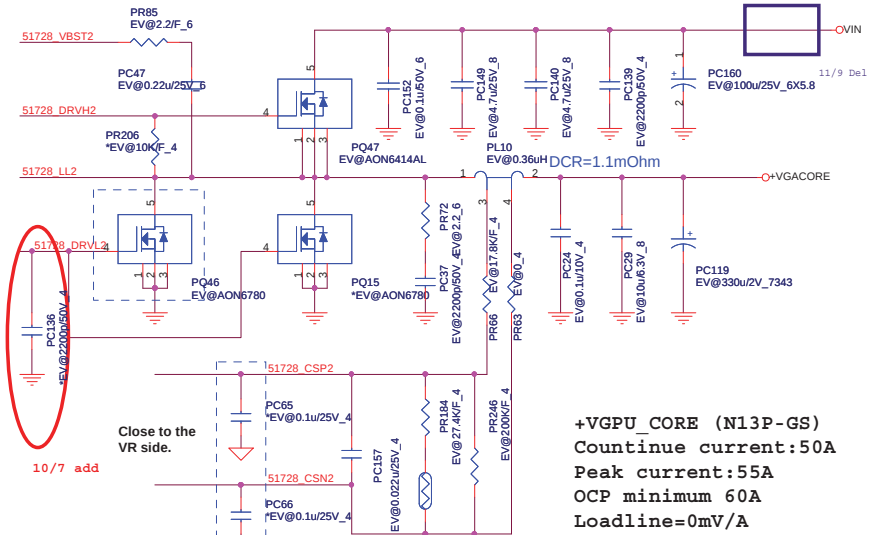
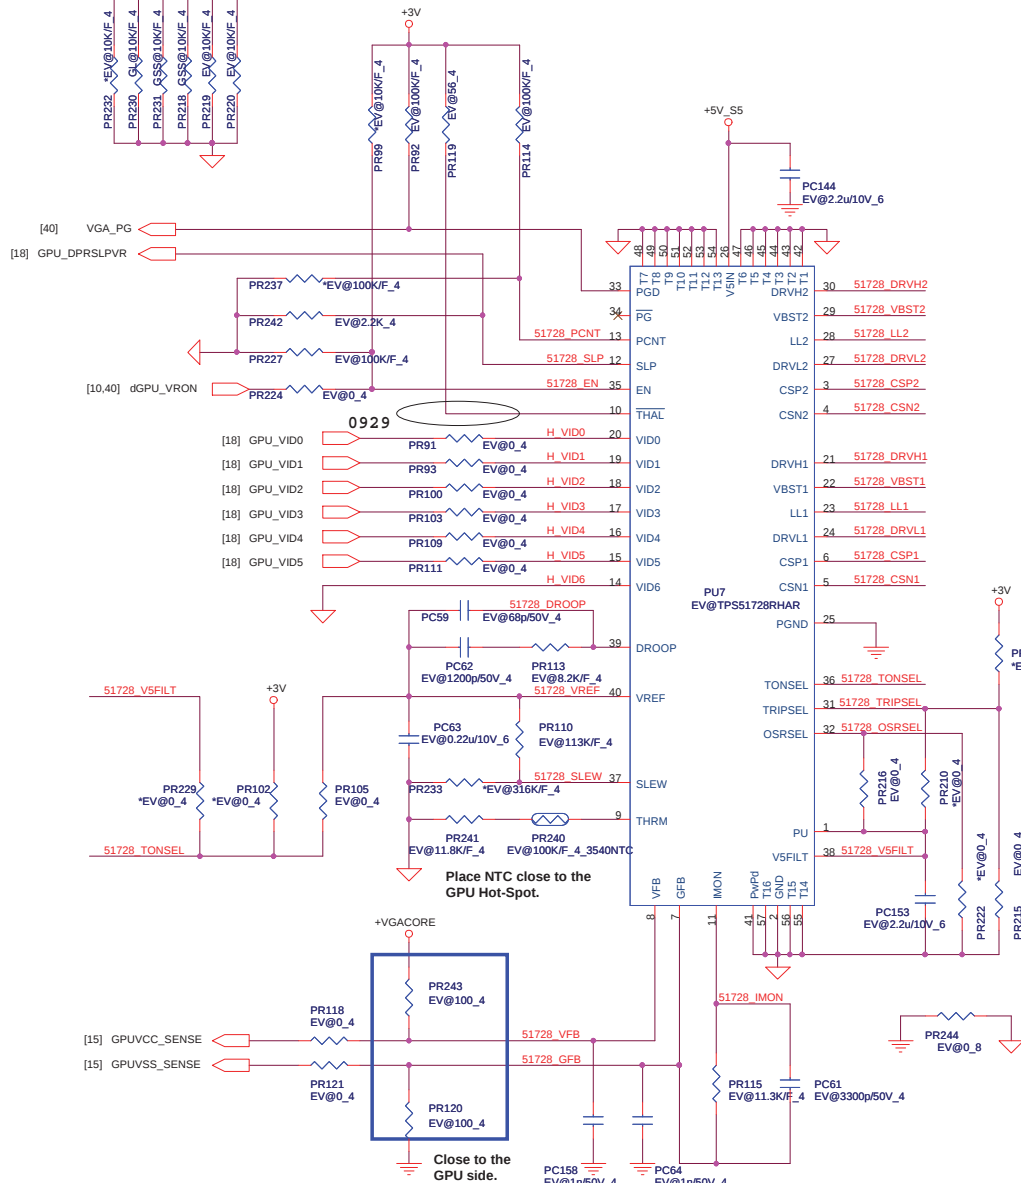


+VGPU_CORE (N13P-GS)
 Countinue current:50A
 Peak current:55A
 OCP minimum 60A
 Loadline=0mV/A

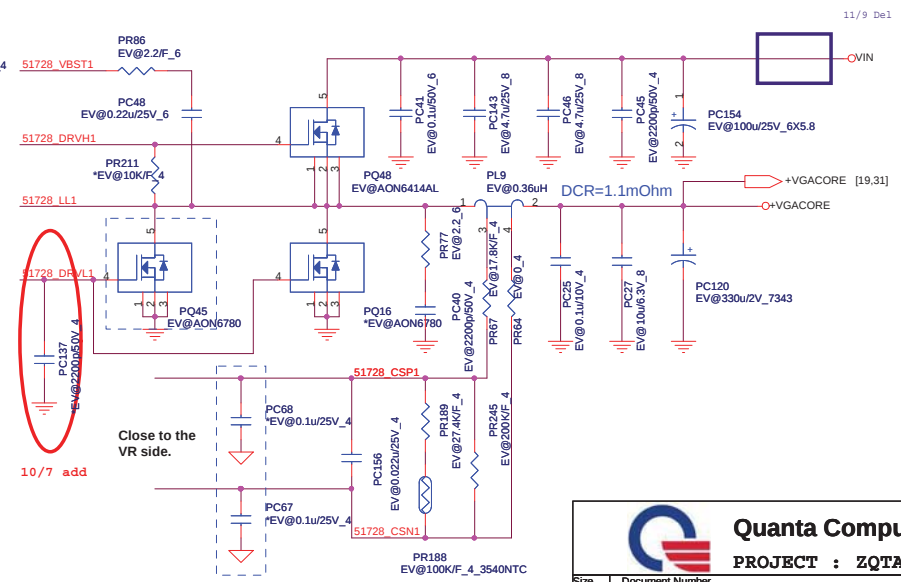


Quanta Computer Inc.

PROJECT : ZQTA/ZQSA

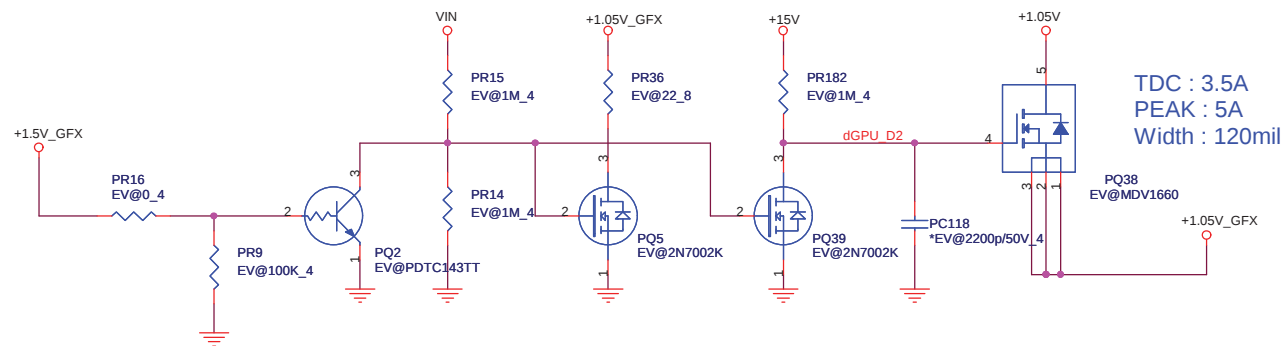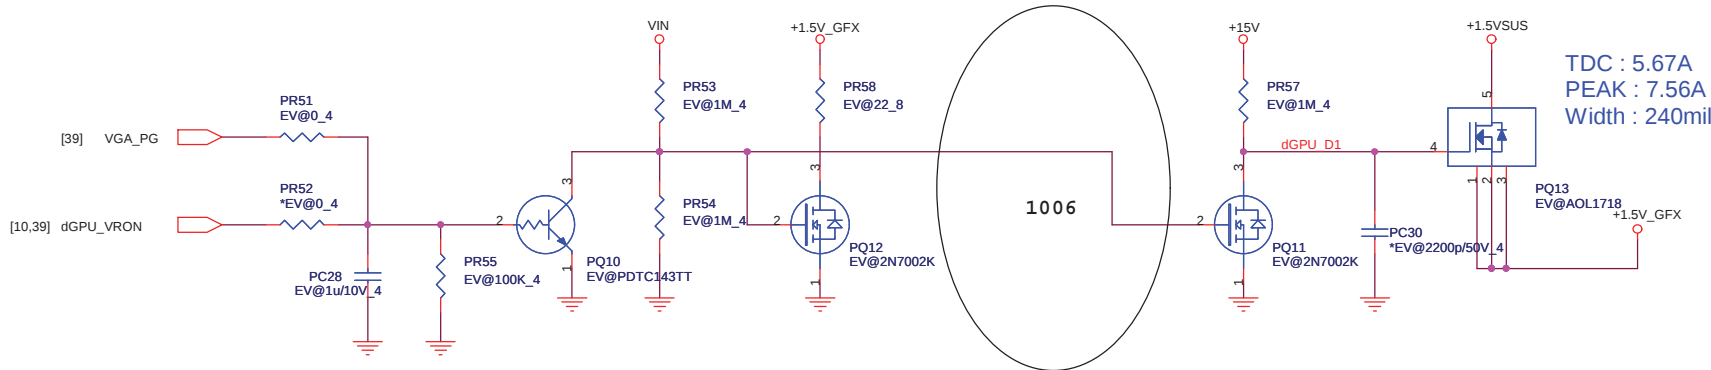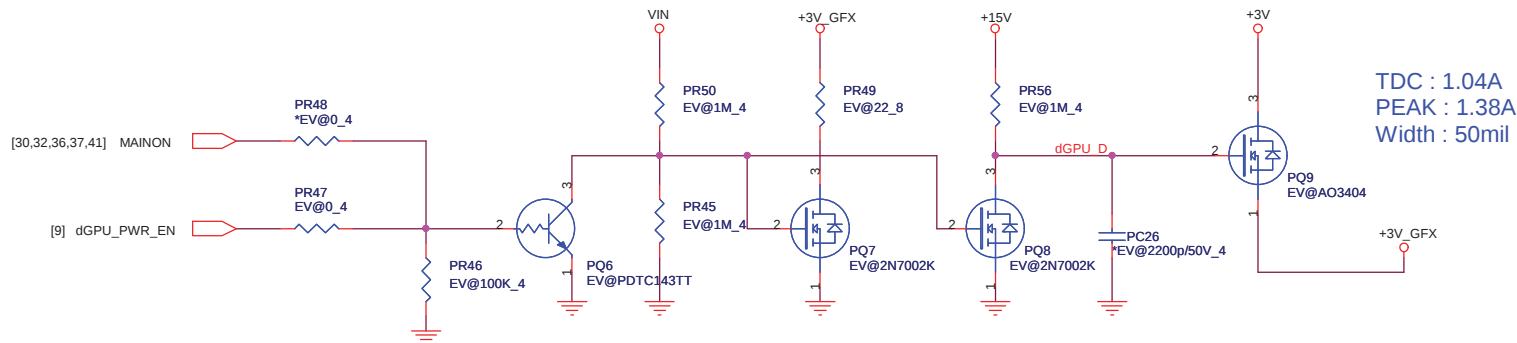




Quanta Computer Inc.
PROJECT : ZQTA/ZQSA

Size	Document Number	Rev
	GPU_PWR	1A
Date:	Friday, November 11, 2011	Sheet 40 of 44

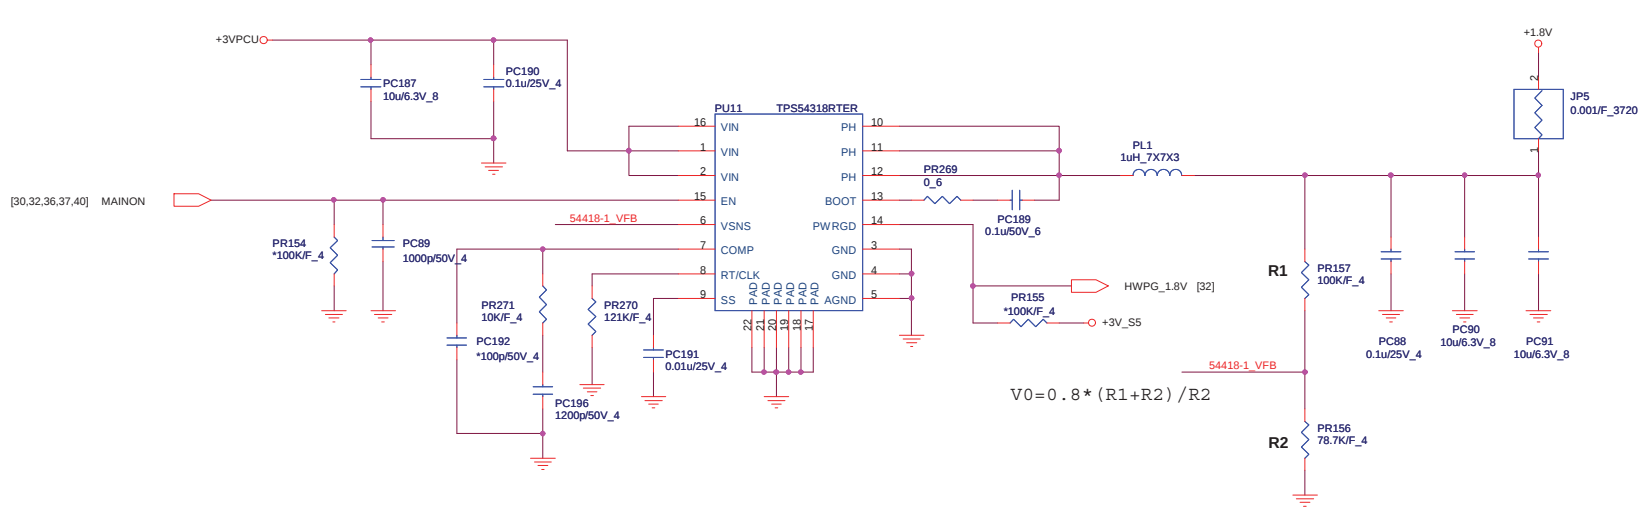

Thermal protection


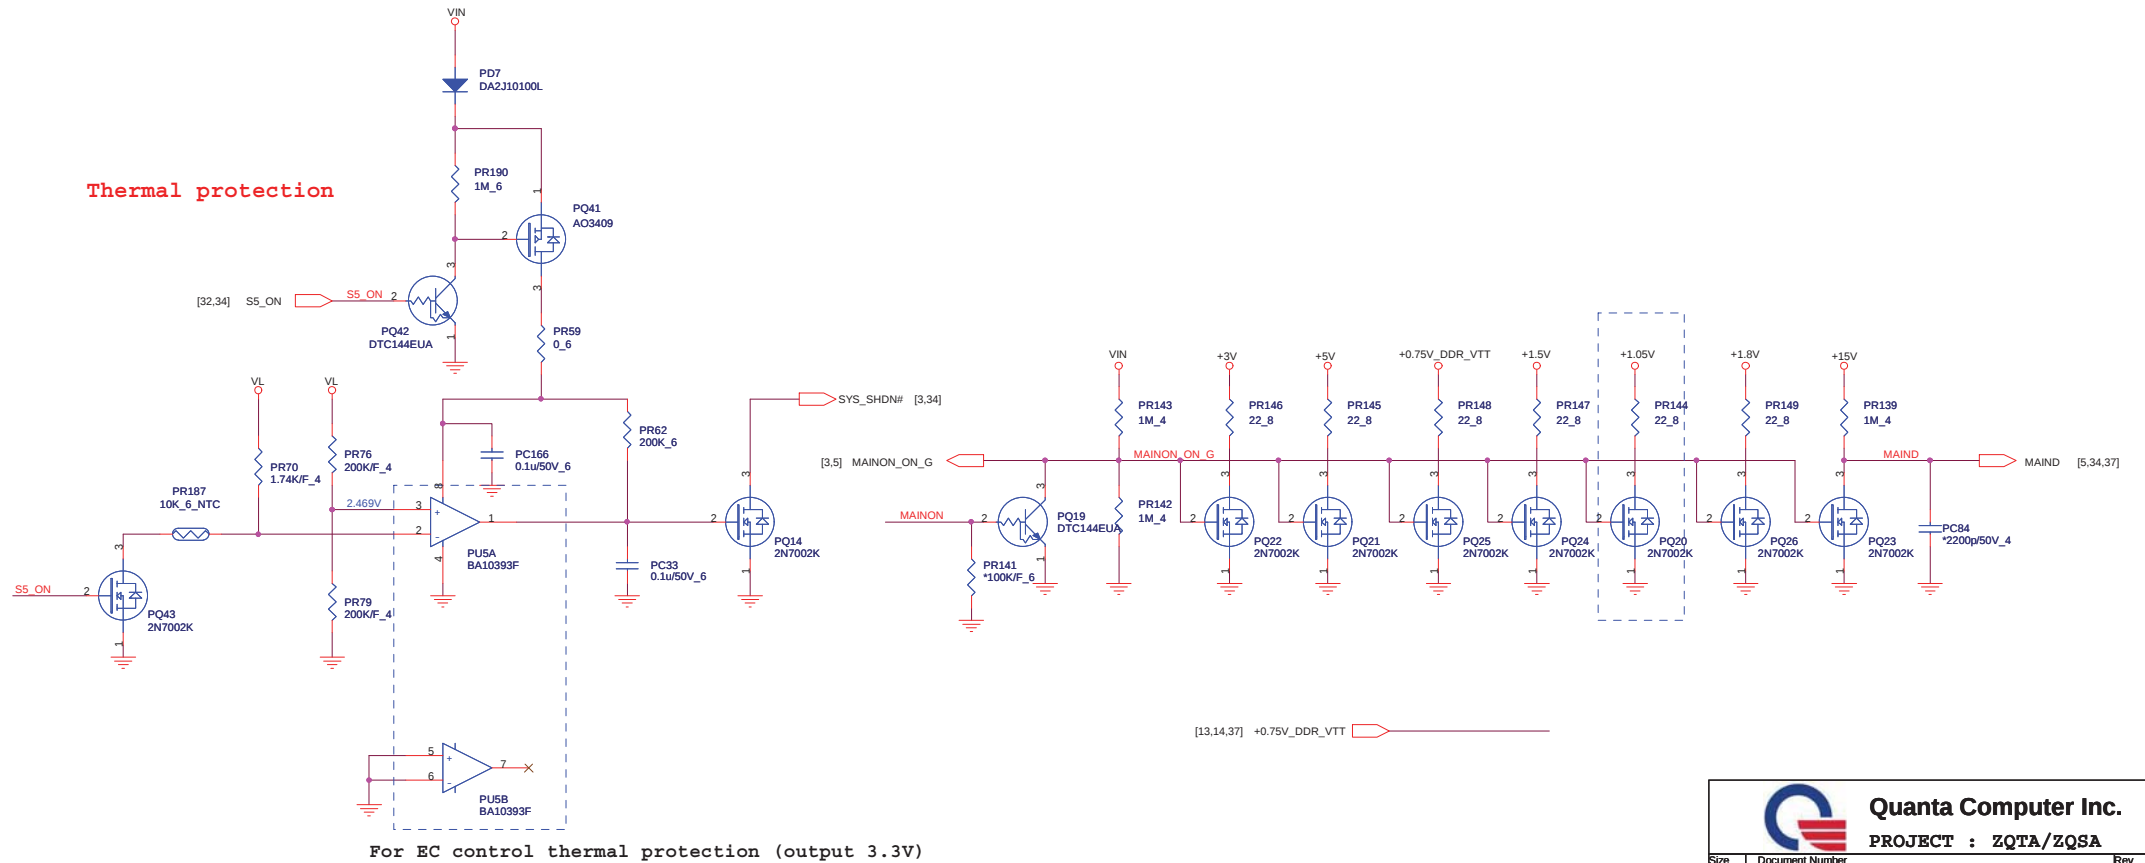


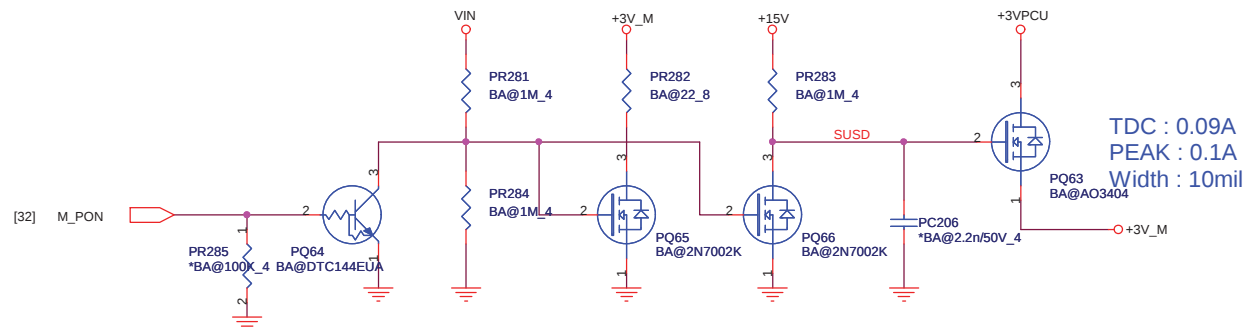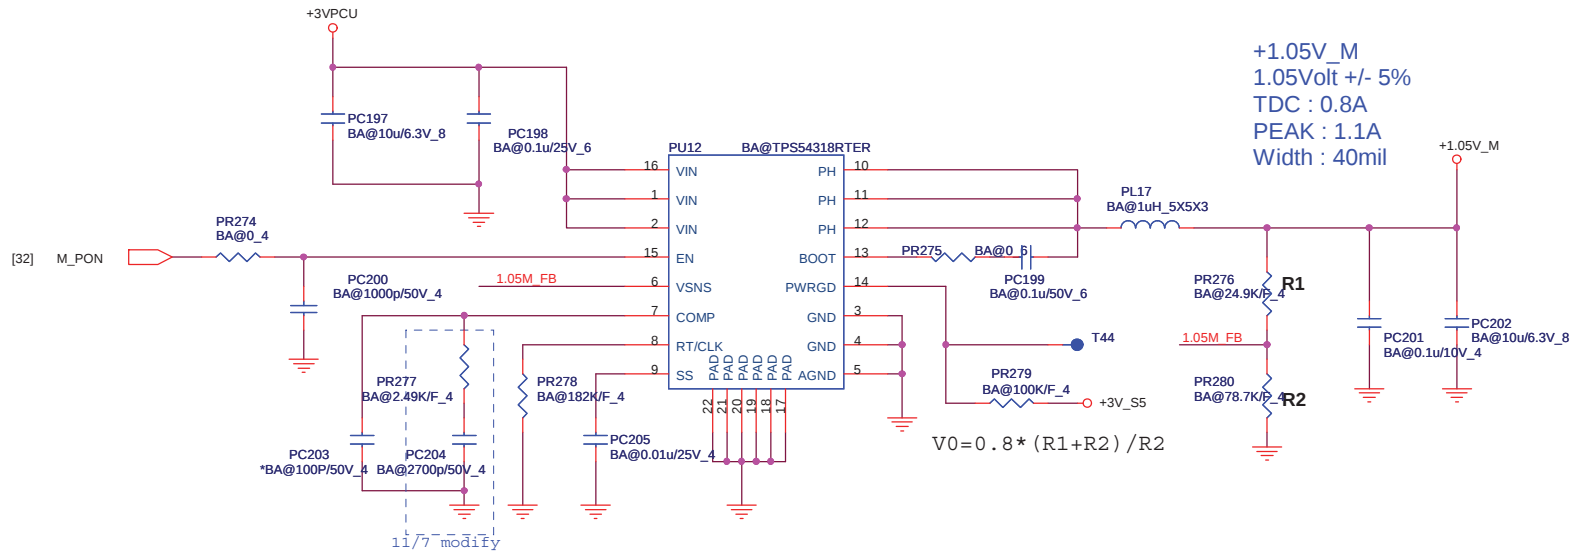

Quanta Computer Inc.
PROJECT : ZQTA/ZQSA

Size	Document Number	Rev
	+1.05V_M/+3V_M	1A
Date:	Friday, November 11, 2011	Sheet 42 of 44

Hole

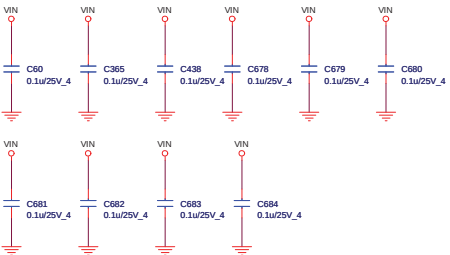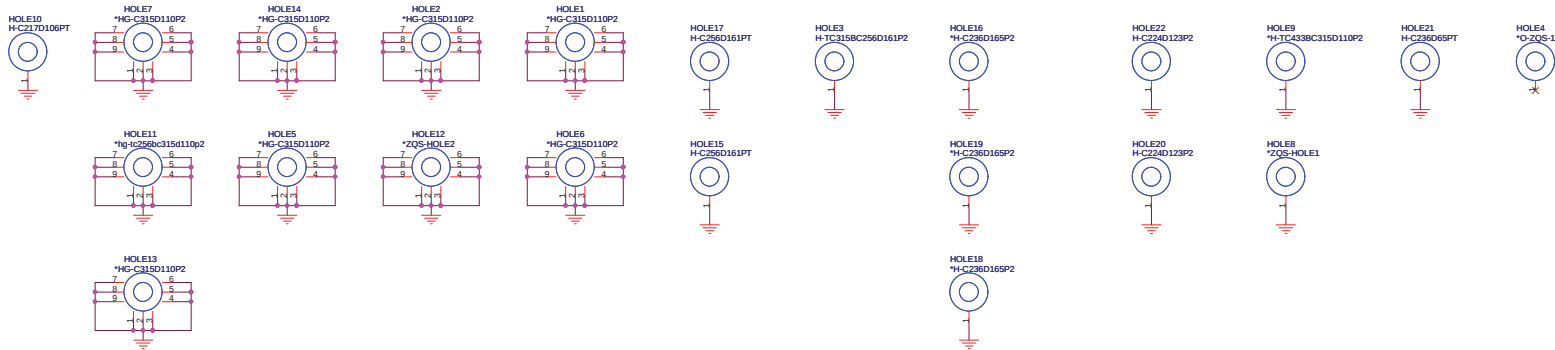

5		4	3	2	1		
Model	date	CHANGE LIST					
ZASA/ZSQTA	9/26	page3 : add R511,R525,R527,R528,R529 for Discrete Only &PCH_JTAG_TDO net change pull-up from +3V_S5 to +1.05 rail					
	9/27	Update power circuit Page19 : add C3777,C3778					
	9/30	Page18 : add Q3508 for U7 GPU_THERMAL_ALERT net Page31 : Del CN1					
	10/3	Page18 : add dGPU_ACDC# net to U7 GPIO04 & add R347 Page22 : add R557,R554 to pull-down & R548,R547 stuff for Discrete only Page25 : add R3693,C116 for ODD zero power circuit					
	10/4	Page31 : CN8 add board id3 & board id4 net for touch pad ID control					
	10/5	Page31 : CN8.2,CN8.3 add CLK_SDATA & CLK_SCLK net for touch pad & add R278,R279 Page15 : U41 Power rail change to +3V_GFX Page24 : Del Q16 no't support wake up function Page18 : add Q3509 for dGPU_ACDC# net Page31 : add L35,R3694,R3695 for touch pad 5V & 3V option & add R297,R295 Fan PWR option					
	10/6	Page17 : IFPAB_PLLVDD rail change from +1.8V_GFX to +3V_GFX Page27 : U6 change footprint Page39 : PWR engineer add PQ3006,PQ3005 Page40 : PWR engineer Del PR193,PQ51,PQ54					
	10/7	Page16 :add C3779,C3780 Page29 :add C542,C530 for EMI solution & C544 change to 4.7u 0603 type Page35 :PWR engineer add PC3037,PC3038,PC3039 Page35 :PWR engineer add PC3035,PC3036					
	10/11	Page8 :add R376,R381,R393,R407,R421,R434 for Dual SPI ROM Page9 :U13 power rail change to +3V Page10 :SV_DET_NC net add R250 to pull-down Page27 :add R133,R235 Page30 :C443 change to 3528 type & add C366,R340 Page31 :CN2.27 pin change to +VGACORE Page32 :add R330,R328 pull-up +3VPCU for GPUT_CLK,GPUT_DATA net					
	10/14	Page20 :add C3781,C3782,R3569,R3570,R3571,R3576 Page21 :add C3783,C3784,R3577,R3578,R3579,R3581					
 Quanta Computer Inc. PROJECT : ZQTA/ZQSA Size Document Number Change list Date: Friday, November 11, 2011 Rev 1A		DOC NO.		PROJECT MODEL : PART NUMBER:	ZQTA/ZQSA	APPROVED BY: DRAWING BY:	DATE: REVISION:
5		4	3	2	1		

www.s-manuals.com